
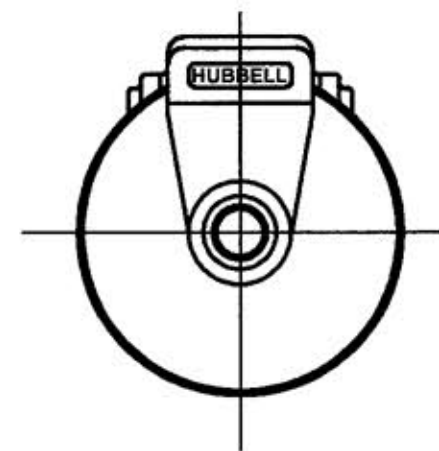


M-6080 5

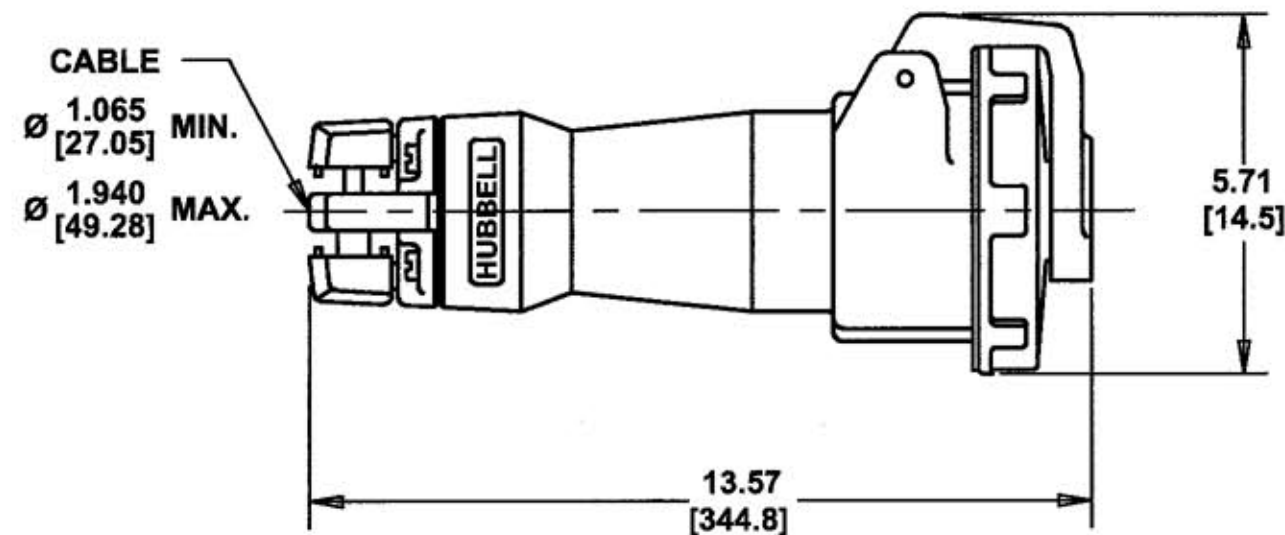

LIST OF PARTS		
DESCRIPTION	MATERIAL	FINISH
HOUSING	SEE TABLE	
INTERIOR	THERMOSET	
SLEEVES	BRASS	
INSERT SPRINGS	ST. STEEL	
TERMINAL SCREWS	ST. STEEL	
COVER	POLYESTER	
COVER SCREW	BRASS	NICKEL
COVER SPRING	ST. STEEL	
GASKET	NEOPRENE	
DISC	POLYCARBONATE	
ARM	POLYESTER	
HINGE PIN	ST. STEEL	
HINGE SPRING	ST. STEEL	
GLAND CAP	POLYESTER	
GLANDS	NEOPRENE	
CLAMPS	POLYESTER	
CLAMP NUTS	BRASS	NICKEL
ASSEMBLY SCREWS	ST. STEEL	

DIMENSION SHEET FOR CAT. NO. SEE TABLE

REPAIRABLE ☐

NON-REPAIRABLE ☒

B

M-6080

5

CAT. NO.	CONFIGURATION	RATING	COMMENTS	HOUSING		CAT. NO.	CONFIGURATION	RATING	COMMENTS	HOUSING	
				MATERIAL	COLOR					MATERIAL	COLOR
						HBL4100C7W		100 A 3Ø 480 VAC		NYLON	RED
						HBL4100C9W		100 A 3Ø 250 VAC		NYLON	BLUE
HBL4100C5WS		100 A 3Ø 600 VAC PILOT CONTACT A600		NYLON	BLACK						
HBL4100C5W		100 A 3Ø 600 VAC		NYLON	BLACK						
HBL4125C6W		125 A 380-415 VAC		NYLON	RED	HBL4100C12W		100 A 125/250 VAC		NYLON	ORANGE

NOTES (UNLESS OTHERWISE SPECIFIED)

1) TOLERANCES ARE:

DECIMALS ± .03
ANGLES ± 2°

2) DIMENSIONS ARE: INCHES

[MILLIMETERS]

5 REDRAWN ON CAD WITH CHANGES. ADDED "HOUSING" & "COMMENTS" COLUMNS, TO TABLE, AND NOTES 1 & 2. IN TABLE, "380 - 415VAC" WAS "380VAC" AND "A" WAS "AMP". IN LIST OF PARTS, "SEE TABLE" WAS "NYLON" AND "NEOPRENE" WAS "RUBBER" IN (2) PLACES. "CABLE Ø1.065[27.05] MIN./Ø1.940 [49.28] MAX" WAS "CABLE DIA. 1.200 30.48MM MIN. 1.780[45.21] MAX". "Ø" WAS "DIA." AND "[XX.X]" WAS "MM". SUPERSEDES DRAWING DATED 5/9/80 PER DCN #12944. JMN

SYM	REVISIONS	APP	DATE
-----	-----------	-----	------

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE
100A & 125A 3 POLE 4 WIRE
PIN AND SLEEVE CONNECTORS

TOLERANCES UNLESS OTHERWISE SPECIFIED		WIRING DEVICE-KELLEMS HUBBELL INCORPORATED BRIDGEPORT, CT	
FRACTIONS	1/64	DR. BY	MJK
DECIMALS	± .005	APP. BY	DJP
ANGLES	± 2°	TR. BY	JMN
		CHK'D BY	DJP
		DATE	6/26/06