


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				. .	△				. .
△				. .	△				. .
△				. .	△				. .

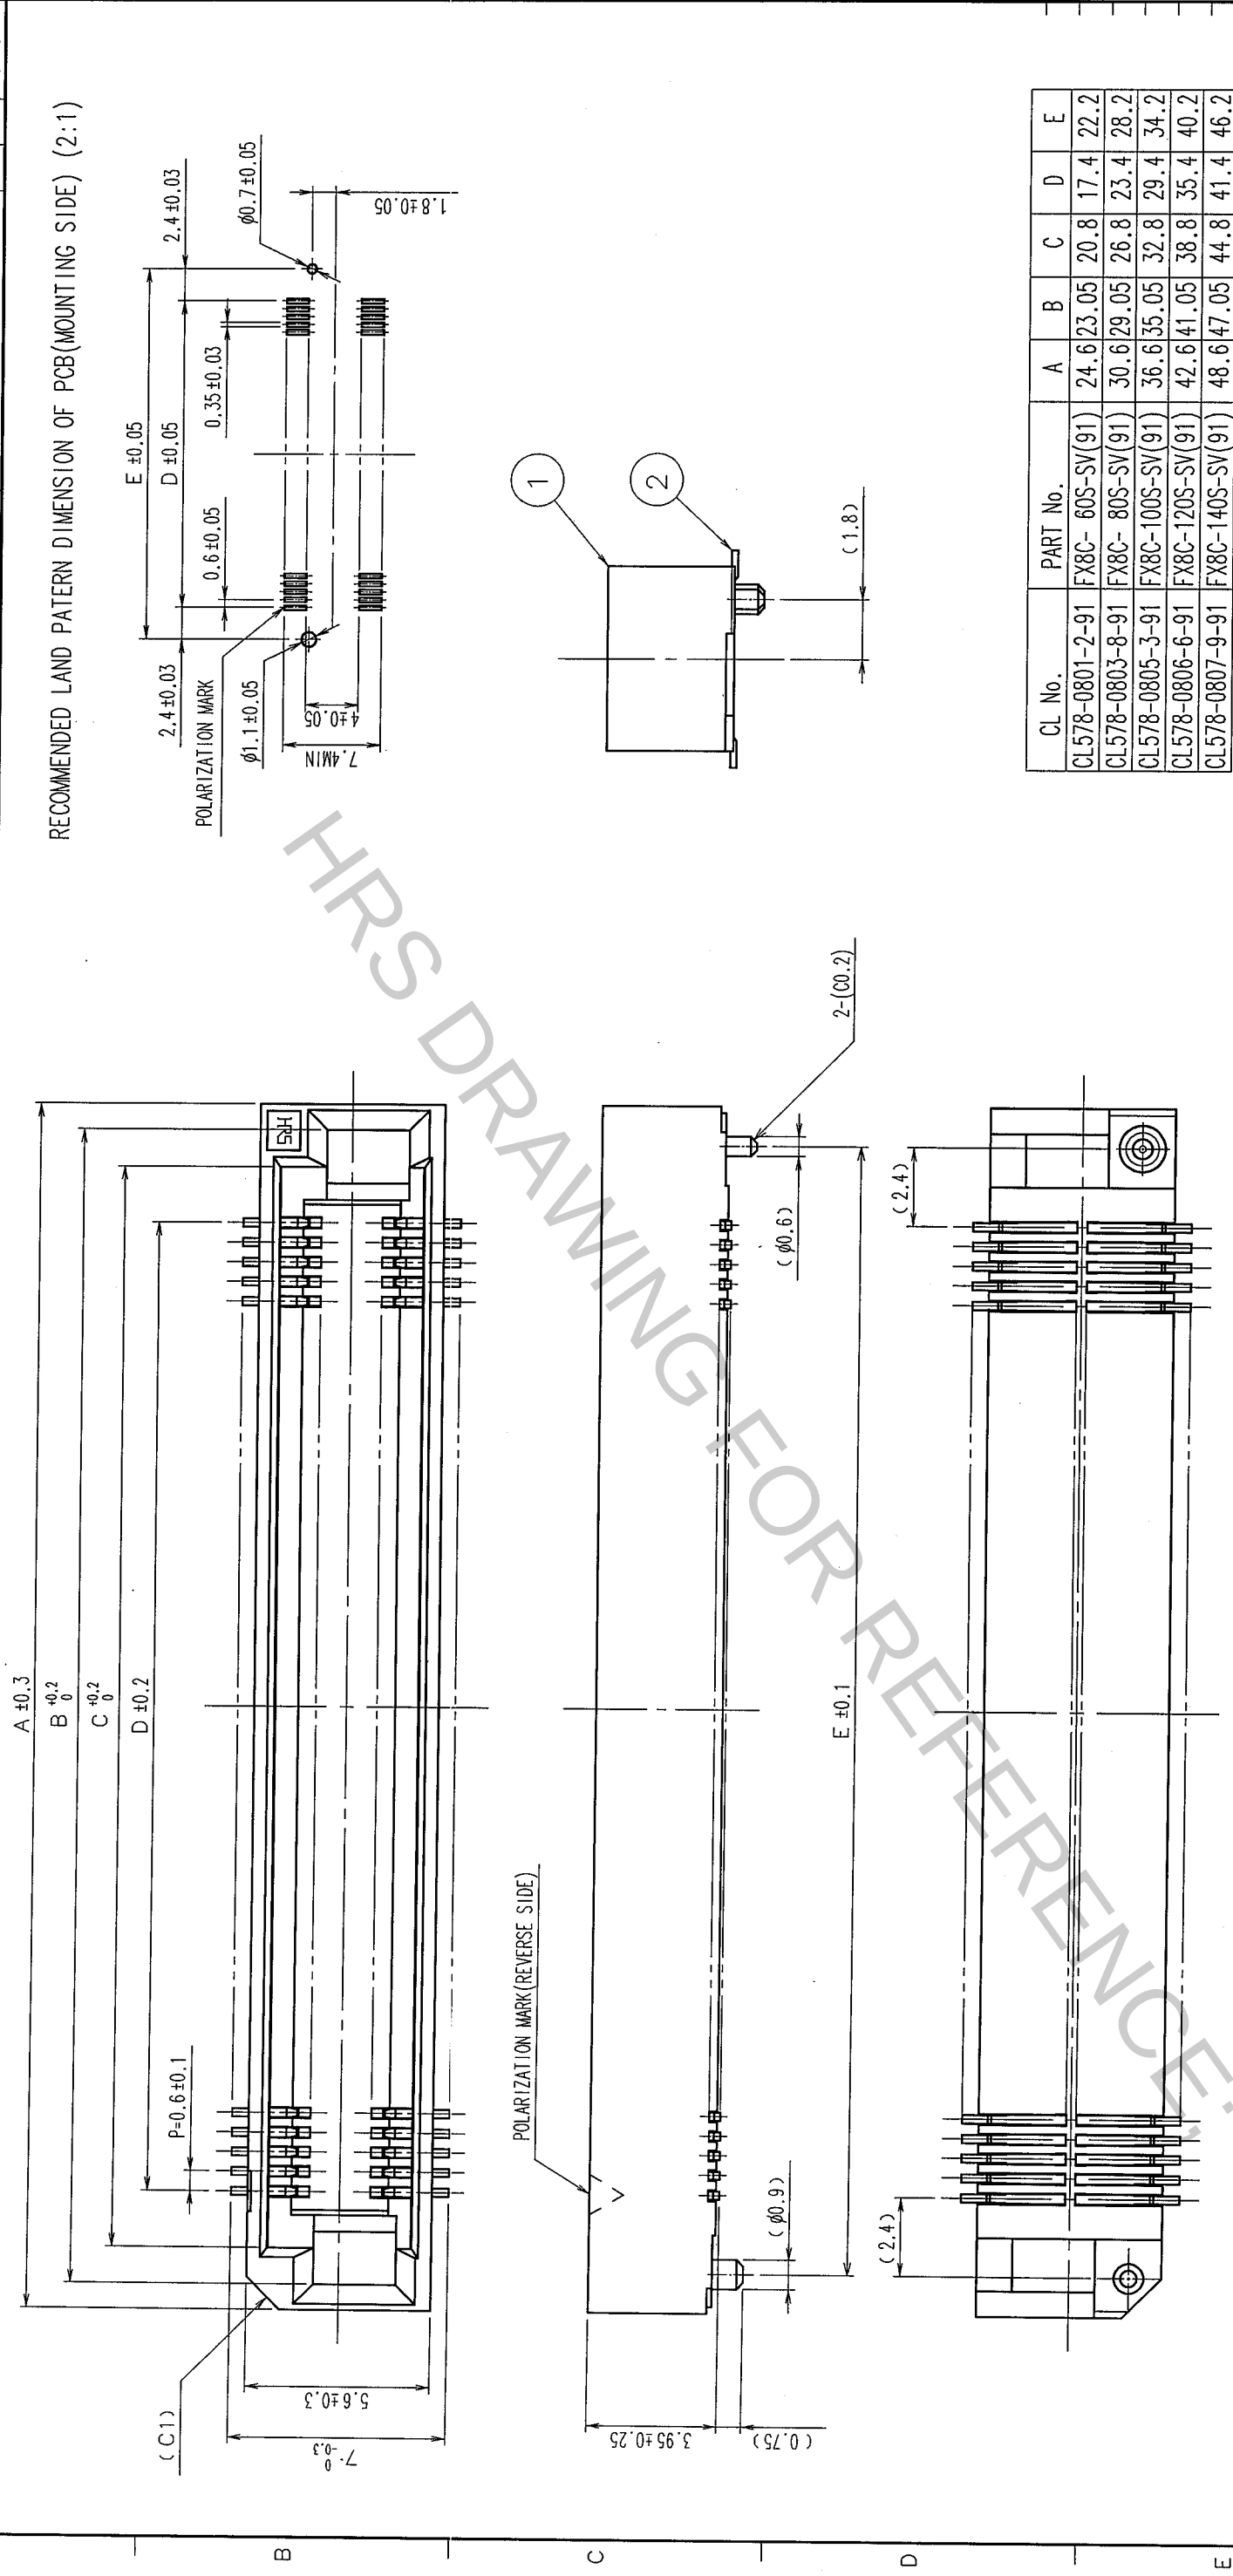

CL No.	PART No.	A	B	C	D	E
CL578-0801-2-91	FX8C- 60S-SV(91)	24.6	23.05	20.8	17.4	22.2
CL578-0803-8-91	FX8C- 80S-SV(91)	30.6	29.05	26.8	23.4	28.2
CL578-0805-3-91	FX8C-100S-SV(91)	36.6	35.05	32.8	29.4	34.2
CL578-0806-6-91	FX8C-120S-SV(91)	42.6	41.05	38.8	35.4	40.2
CL578-0807-9-91	FX8C-140S-SV(91)	48.6	47.05	44.8	41.4	46.2

1	POLYPHENYLENE SULFIDE	LIGHT BROWN	UL94V-0	2	PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.1μ m min. MOUNTING AREA : GOLD FLASH UNDER PLATING : NICKEL 1.5μ m min.	
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS	
CODE NO. (OLD)				DRAWN	DESIGNED	CHECKED	APPROVED
				T. Noda	K. Doi	H. Okawa	H. Okawa
				'05.03.16	'05.03.16	'05.03.16	'05.03.16
DRAWING NO.		PART NO.		F X 8 C - * * S - S V (9 1)			
EDC3-151022-21							
SCALE							
5 : 1							
UNITS							
mm	HIROSE ELECTRIC CO., LTD		CODE NO.		CL578		
HRS							1/2

NOTE

- 1 LEAD CO-PLANARITY SHALL BE 0.1 mm MAX.
- 2 FOR DETAILS, SEE THE SECTION CONCERNING THE DELIVERY FORM ON NEXT PAGE.
- 3 FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED DEPENDS ON CIRCUMSTANCES.
- 4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

TO	PCK			
----	-----	--	--	--

