
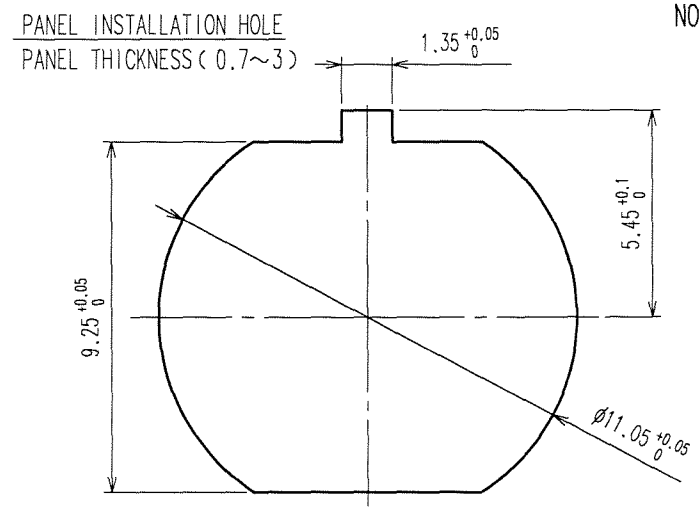
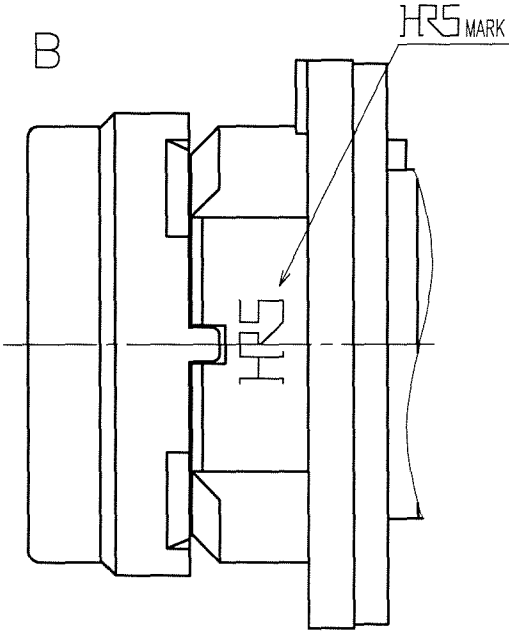
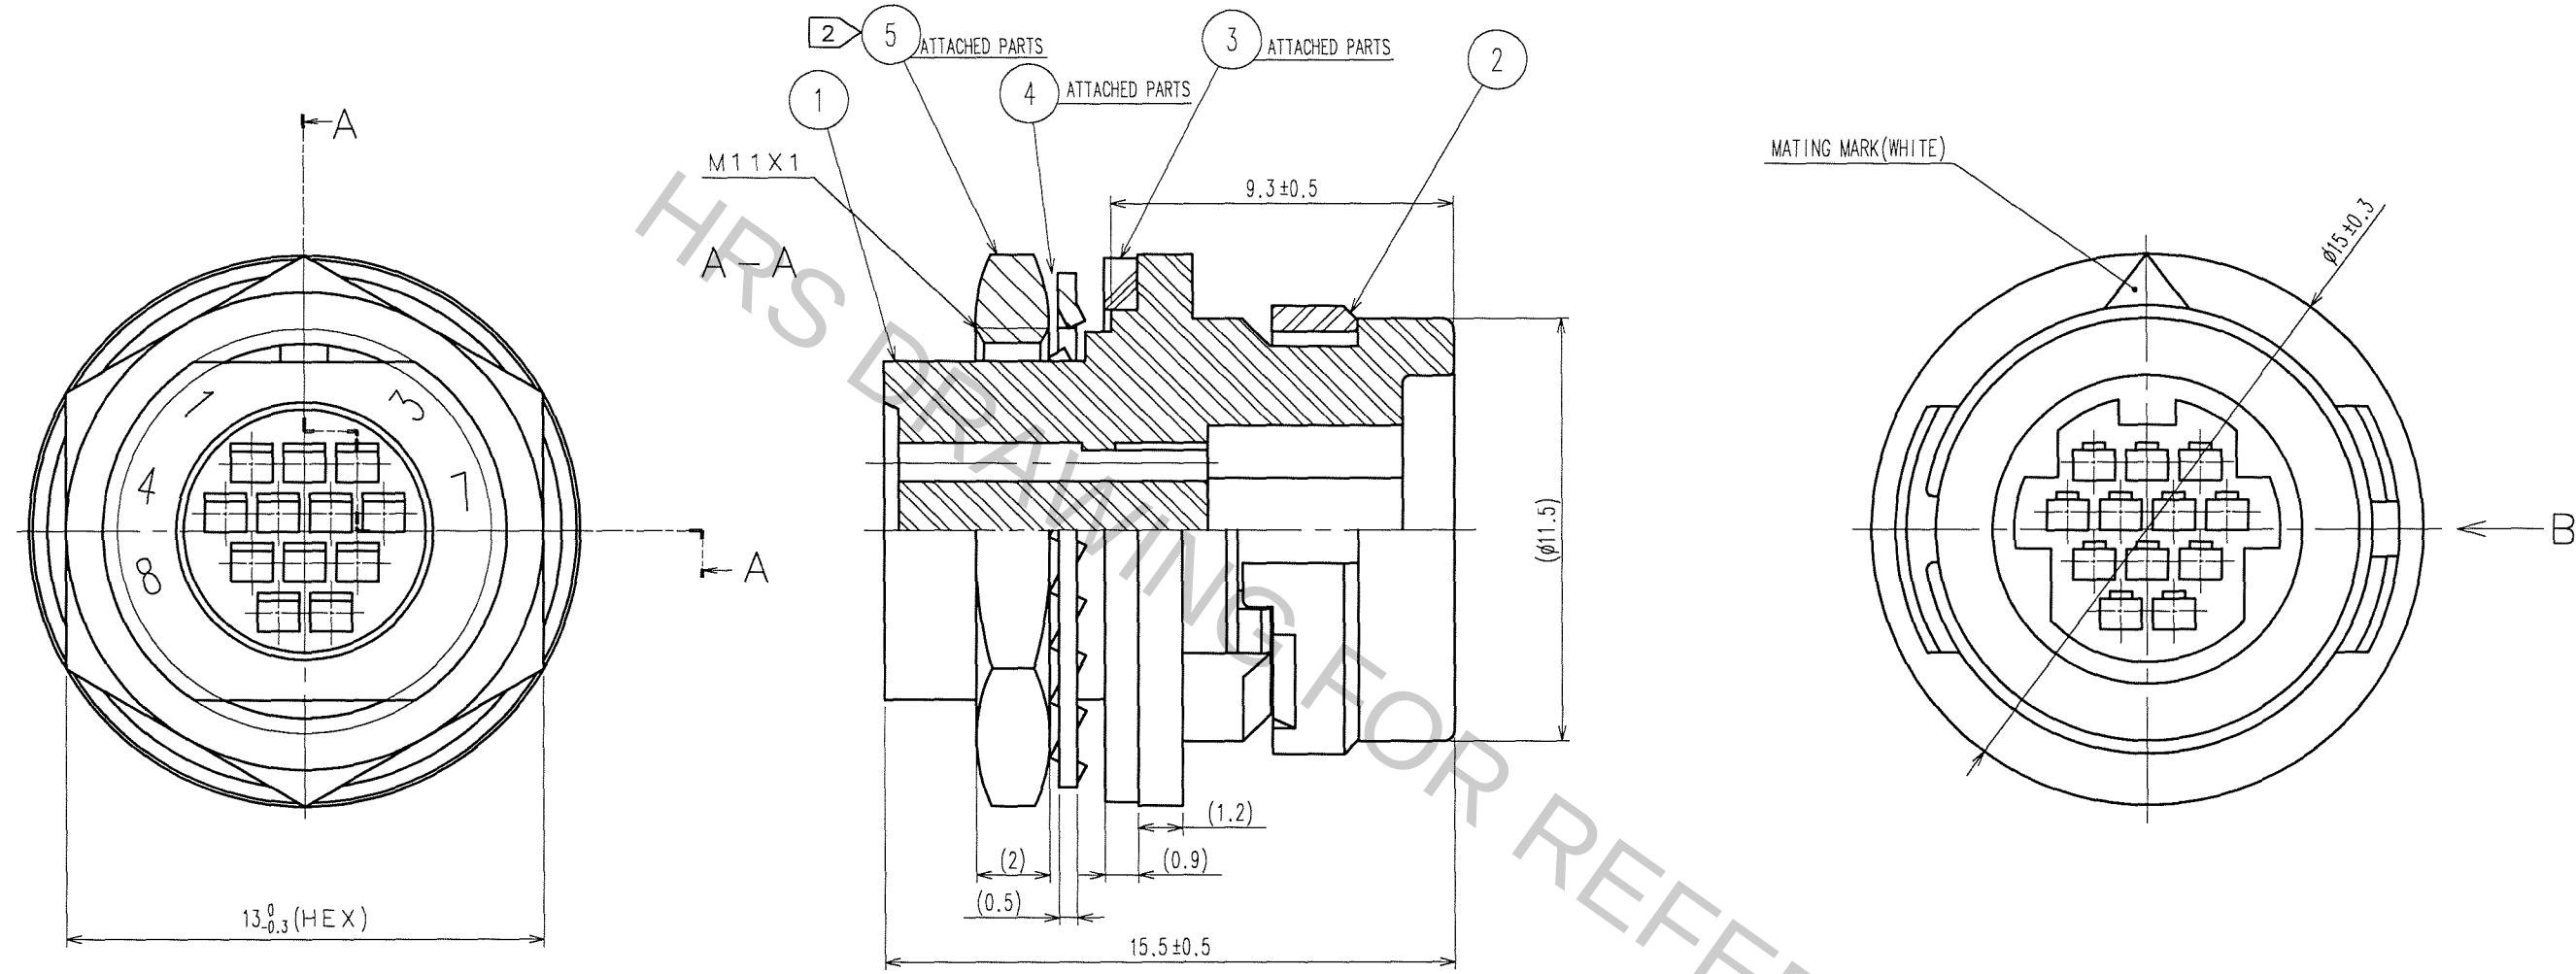


Aug.1.2016 Copyright 2016 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	DIS-C-000585	T.K	E.K	07.07.27					



NOTES 1 APPLICABLE CRIMPING CONTACT:HR30-PC-211
(APPLICABLE WIRE:26-30 AWG WIRE JACKET DIAMETER:Ø1 MAX)
APPLICABLE CONTACT WITHDRAWAL TOOL:HP30-TP
2 THE RECOMMENDED CLUMP TORQUE OF REF. NO.⑤ TO BE 0.8N·m.
LOCTITE 271, LOCPRIMER 7649, LOCTITE JAPAN IS RECOMMENDED TO PREVENT REF. NO.⑤ FROM LOOSENING.

3	CR	(BLACK)		5	BRASS ^①	NICKEL PLATING	
2	PPS	(BLACK)	UL94V-0	4	PHOSPHOR BRONZE	NICKEL PLATING	
1	PPS	(BLACK)	UL94V-0				
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS	
CODE NO. (OLD)			DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
			M.HANYU	H.NAGANO	E.KUNII	M.SATO	
			'05 8 10	'05 8 10	'05 8 10	'05 8 10	. .
		DRAWING NO.		PART NO.			
SCALE		EDC3-112155-71		HR30-7R-12PC(71)			
5 : 1							
UNITS		CODE NO.		CL130-1013-8-71			
mm		 HIROSE ELECTRIC CO., LTD		1/1			

TO
R