



Aug.1.2016 Copyright 2016 HIROSE ELECTRIC CO., LTD. All Rights Reserved.


	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	1	DIS-C-000585	T.K	E.K	07.07.27
2					. .
3					. .

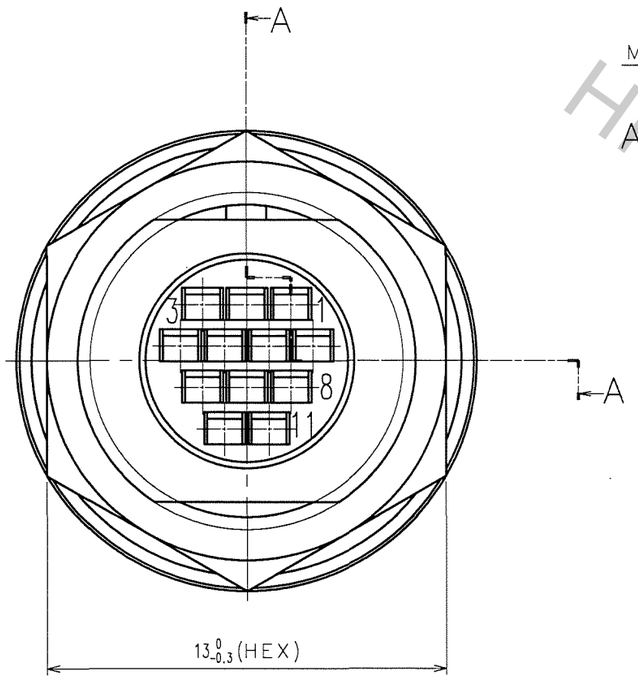

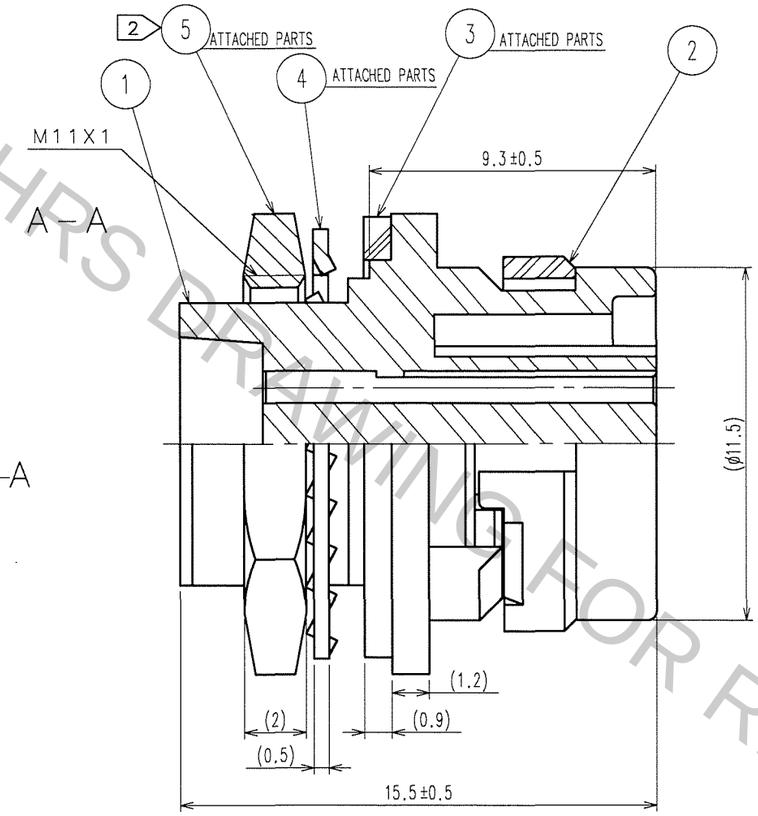

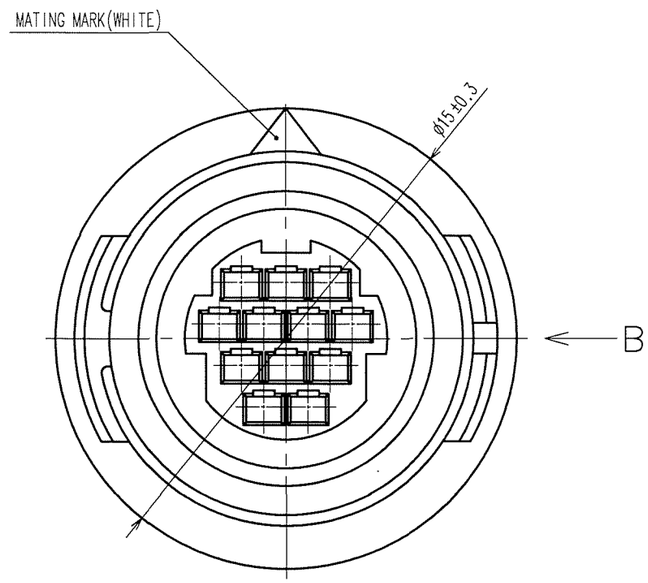

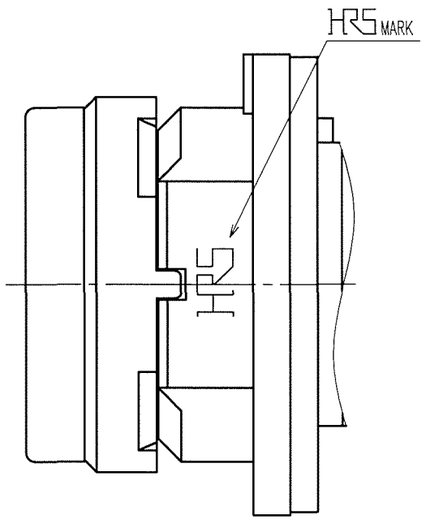

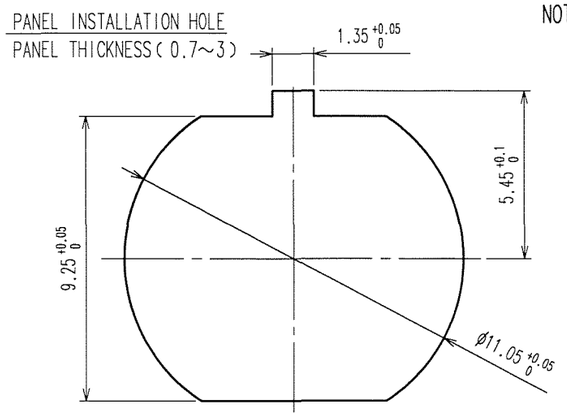

NOTES 1 APPLICABLE CRIMPING CONTACT:HR30-SC-211
(APPLICABLE WIRE:26-30 AWG WIRE JACKET DIAMETER:ø1 MAX)
APPLICABLE CONTACT WITHDRAWAL TOOL:HP30-TP
2 THE RECOMMENDED CLUMP TORQUE OF REF. NO.⑤ TO BE 0.8N·m.
LOCTITE 271, LOCPRIMER 7649, HENKEL JAPAN IS RECOMMENDED TO PREVENT REF. NO.⑤ FROM LOOSENING.

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
3	SYNTHETIC RUBBER	(BLACK)			
2	PPS	(BLACK) UL94V-0	5	BRASS △1	NICKEL PLATING
1	PPS	(BLACK) UL94V-0	4	PHOSPHOR BRONZE	NICKEL PLATING

CODE NO.(OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
	E.KUNII '05 10 05	E.KUNII '05 10 05	. .	M.SATO '05 10 05	. .

SCALE	DRAWING NO.	PART NO.
5 : 1	EDC3-112398-71	HR30-8R-12SC(71)
UNITS mm	HRS HIROSE ELECTRIC CO., LTD	CODE NO. CL130-1014-0-71 1/1

TO
R

HRS DRAWING FOR REFERENCE