

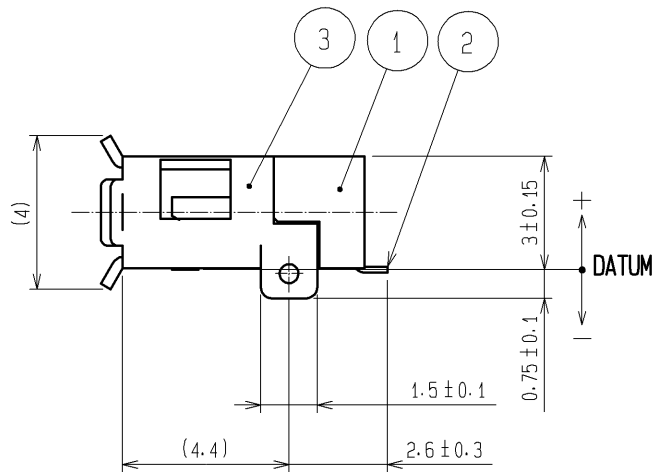
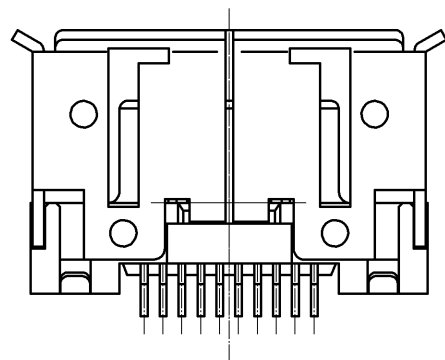
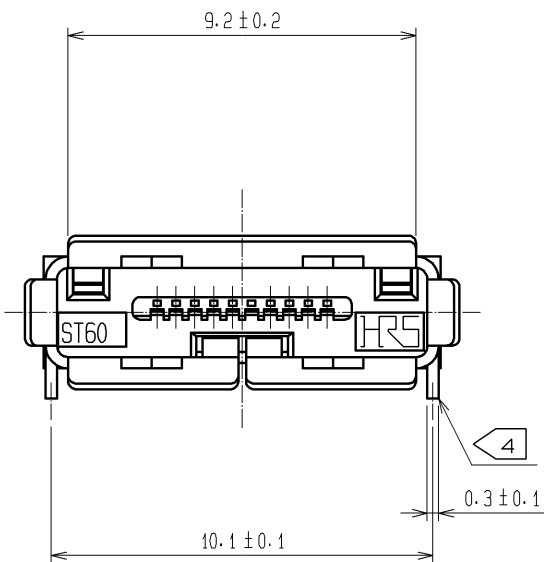


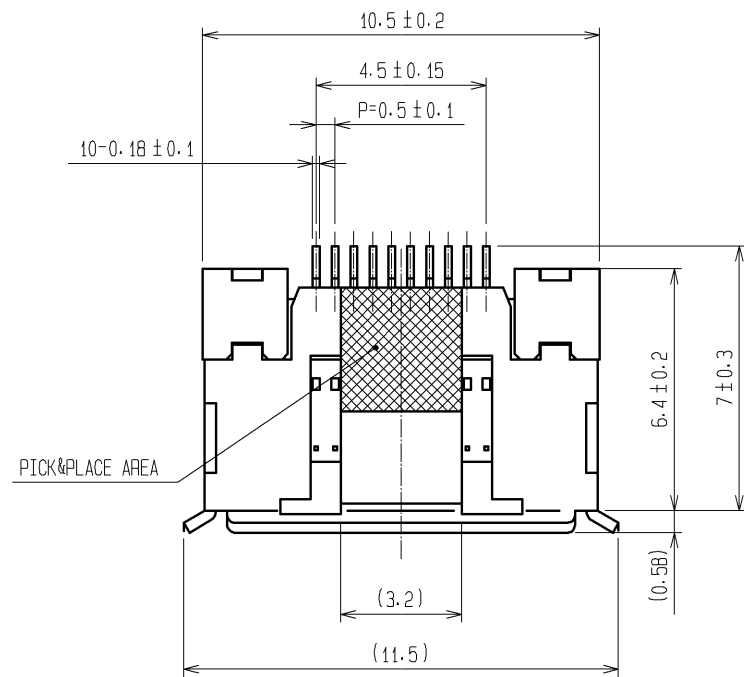


NOTE 1 1REEL:1500 PIECES.
2 CO-PLANARITY SPECIFICATION AS FIG SHOWN IN THE UNDER.
3 CONTACT AREA:GOLD PLATED 0.2μm MIN.
MOUNTING AREA:GOLD PLATED FLASH.
UNDER PLATING:NICKEL PLATED 2μm MIN.

2 SMT CO-PLANARITY



4 MANUAL SOLDERING OF THROUGH HOLE DIP IS NOT ACCEPTABLE.

PANEL CUTOUT(4:1)

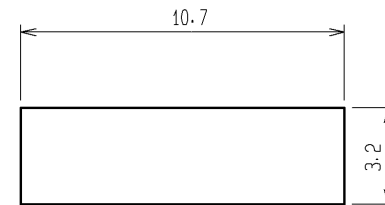

PATTERN OF MOUNTING PLUG(4:1)



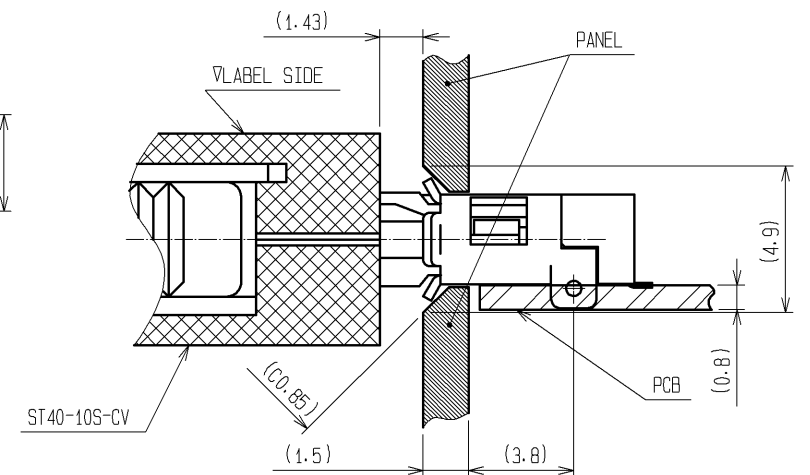


FIGURE FOR PAKAGING(FREE)

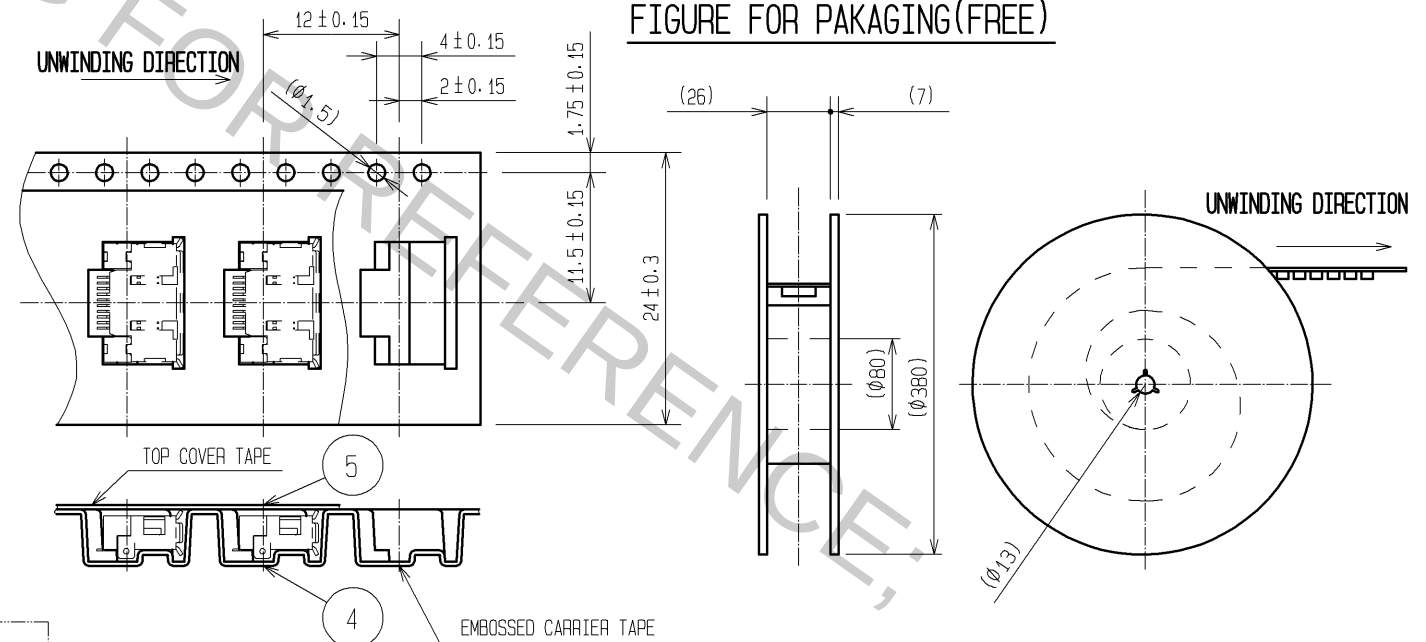

2	COPPER ALLOY	3	5	PE	TOP COVER TAPE				
1	LCP	BLACK UL94V-0	4	PS	EMBOSSED CARRIER TAPE				
NO.	MATERIAL	FINISH, REMARKS	3	STAINLESS STEEL	TIN PLATED				
UNITS mm			SCALE 5 : 1	6 2	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
						DIS-E-003919	TA. TORIHARA	TA. ASO	11. 09. 06
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : AO. SUZUKI		05. 01. 05		DRAWING NO. EDC3-124149-00			
		CHECKED : MR. NAKAMURA		05. 01. 05		PART NO. ST60-10P			
		DESIGNED : HK. TANAKA		05. 01. 05		CODE NO. CL241-0022-5-00			
		DRAWN : HK. TANAKA		05. 01. 05					
								6 1	2

HRS HIROSE ELECTRIC CO., LTD.

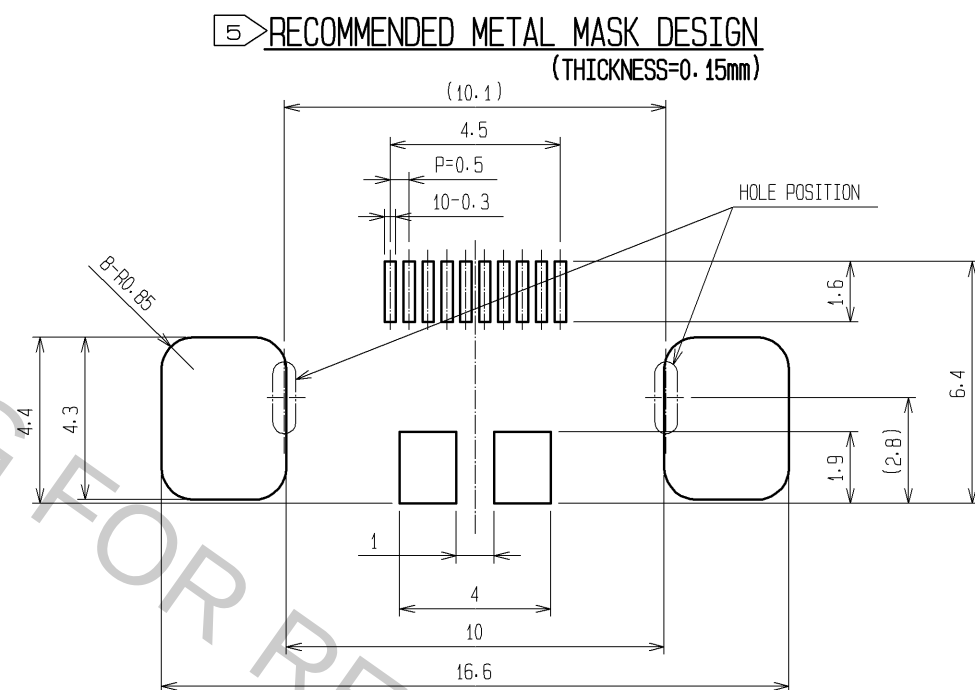

HRS	DRAWING NO.	EDC3-124149-00	
	PART NO.	ST60-10P	
	CODE NO.	CL241-0022-5-00	 2/2