


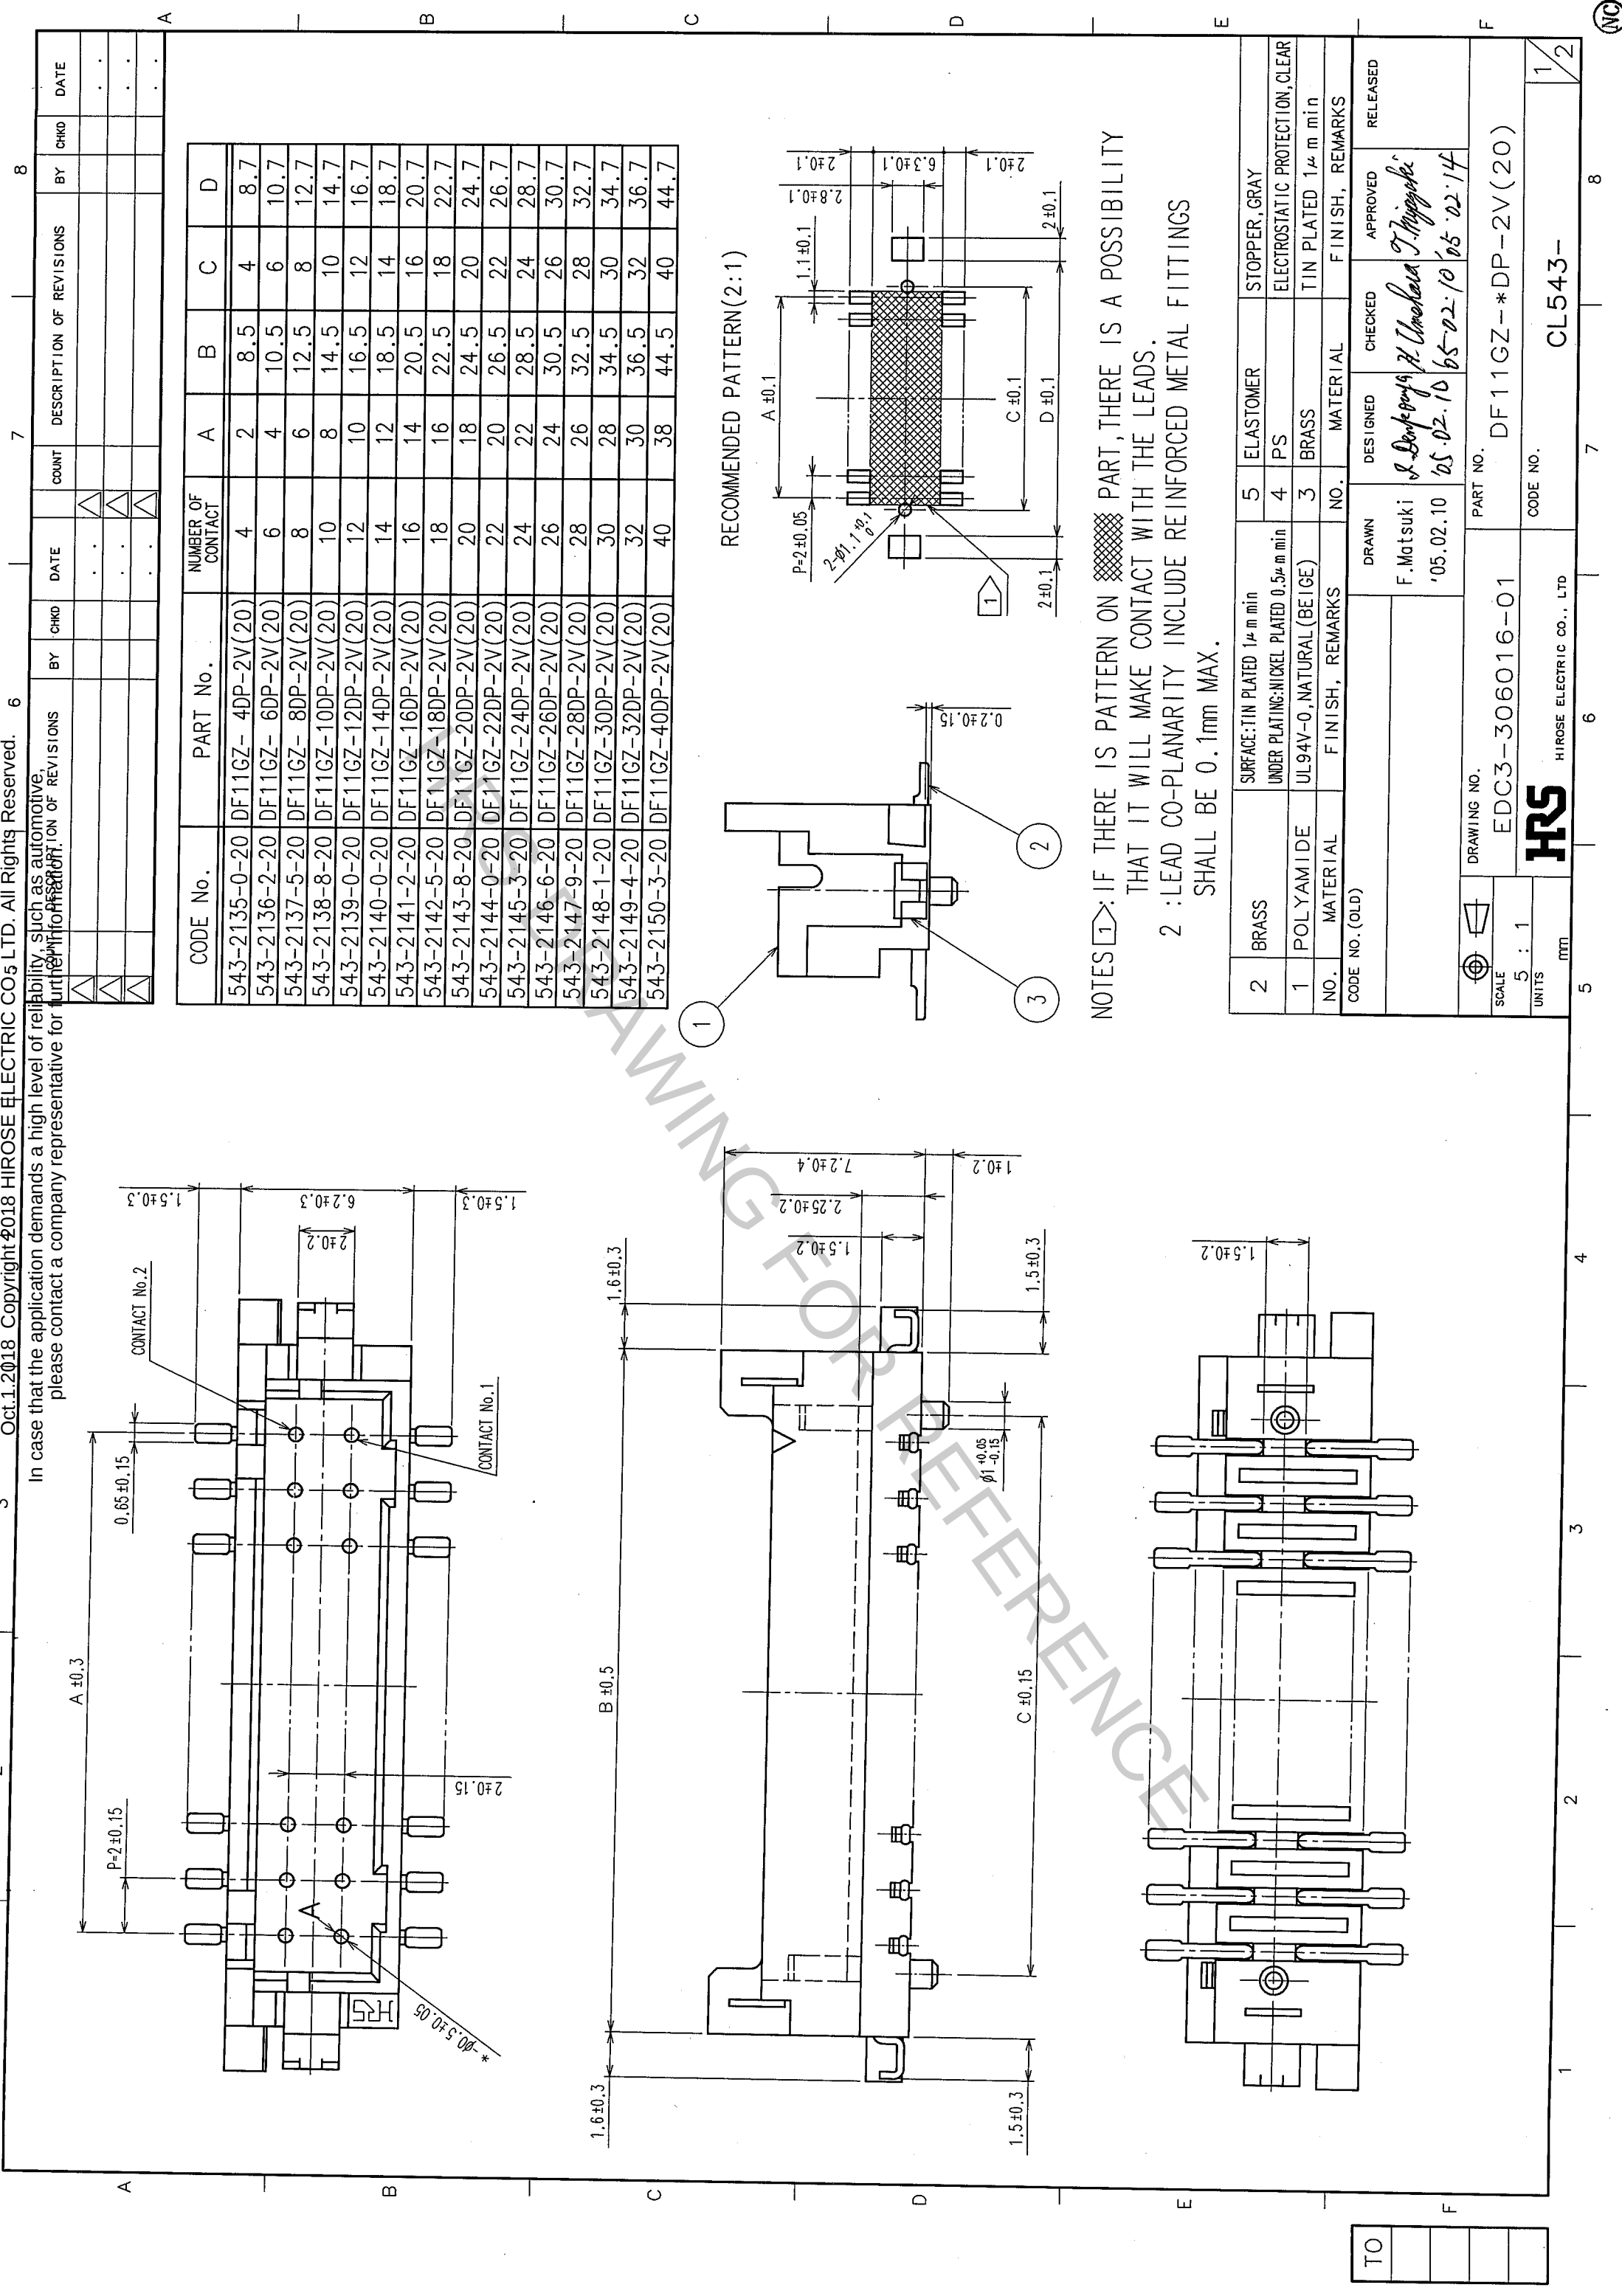

Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO. LTD. All Rights Reserved. 6

In case that the application demands a high level of reliability, such as automotive, please contact a company representative for further information.

TO

| CODE No.      | PART No.           | NUMBER OF CONTACT | A  | B    | C  | D    |
|---------------|--------------------|-------------------|----|------|----|------|
| 543-2135-0-20 | DF11GZ-4DP-2V(20)  | 4                 | 2  | 8.5  | 4  | 8.7  |
| 543-2136-2-20 | DF11GZ-6DP-2V(20)  | 6                 | 4  | 10.5 | 6  | 10.7 |
| 543-2137-5-20 | DF11GZ-8DP-2V(20)  | 8                 | 6  | 12.5 | 8  | 12.7 |
| 543-2138-8-20 | DF11GZ-10DP-2V(20) | 10                | 8  | 14.5 | 10 | 14.7 |
| 543-2139-0-20 | DF11GZ-12DP-2V(20) | 12                | 10 | 16.5 | 12 | 16.7 |
| 543-2140-0-20 | DF11GZ-14DP-2V(20) | 14                | 12 | 18.5 | 14 | 18.7 |
| 543-2141-2-20 | DF11GZ-16DP-2V(20) | 16                | 14 | 20.5 | 16 | 20.7 |
| 543-2142-5-20 | DF11GZ-18DP-2V(20) | 18                | 16 | 22.5 | 18 | 22.7 |
| 543-2143-8-20 | DF11GZ-20DP-2V(20) | 20                | 18 | 24.5 | 20 | 24.7 |
| 543-2144-0-20 | DF11GZ-22DP-2V(20) | 22                | 20 | 26.5 | 22 | 26.7 |
| 543-2145-3-20 | DF11GZ-24DP-2V(20) | 24                | 22 | 28.5 | 24 | 28.7 |
| 543-2146-6-20 | DF11GZ-26DP-2V(20) | 26                | 24 | 30.5 | 26 | 30.7 |
| 543-2147-9-20 | DF11GZ-28DP-2V(20) | 28                | 26 | 32.5 | 28 | 32.7 |
| 543-2148-1-20 | DF11GZ-30DP-2V(20) | 30                | 28 | 34.5 | 30 | 34.7 |
| 543-2149-4-20 | DF11GZ-32DP-2V(20) | 32                | 30 | 36.5 | 32 | 36.7 |
| 543-2150-3-20 | DF11GZ-40DP-2V(20) | 40                | 38 | 44.5 | 40 | 44.7 |

RECOMMENDED PATTERN(2:1)

NOTES: IF THERE IS PATTERN ON PART, THERE IS A POSSIBILITY THAT IT WILL MAKE CONTACT WITH THE LEADS.  
2: LEAD CO-PLANARITY INCLUDE REINFORCED METAL FITTINGS SHALL BE 0.1mm MAX.

|                |           |                                                                       |            |           |                                 |
|----------------|-----------|-----------------------------------------------------------------------|------------|-----------|---------------------------------|
| 2              | BRASS     | SURFACE: TIN PLATED 1μm min<br>UNDER PLATING: NICKEL PLATED 0.5μm min | 5          | ELASTOMER | STOPPER, GRAY                   |
| 1              | POLYAMIDE | UL94V-0, NATURAL (BEIGE)                                              | 4          | PS        | ELECTROSTATIC PROTECTION, CLEAR |
| NO.            | MATERIAL  | FINISH, REMARKS                                                       | 3          | BRASS     | TIN PLATED 1μm min              |
| CODE NO. (OLD) |           |                                                                       | NO.        | MATERIAL  | FINISH, REMARKS                 |
|                |           |                                                                       | DRAWN      | CHECKED   | APPROVED                        |
|                |           |                                                                       | F. Matsuki | S. Doyama | T. Miyazaki                     |
|                |           |                                                                       | '05.02.10  | '05.02.10 | '05.02.14                       |

|                |                   |
|----------------|-------------------|
| DRAWING NO.    | PART NO.          |
| EDC3-306016-01 | DF11GZ-*DP-2V(20) |
| SCALE          | CODE NO.          |
| 5:1            | CL543-            |
| UNITS          |                   |
| mm             |                   |

