




NOTE 1. PER TRAY:100 PIECES.
2. REFER TO THE DF59 SERIES MATING/UNMATING OPERATION INSTRUCTION MANUAL(ETAD-H0496)
FOR THE OPERATING OF THE PRODUCT.
3. UL(FILE NO. E52653).
C-UL(FILE NO. E52653) APPROVED PRODUCT.

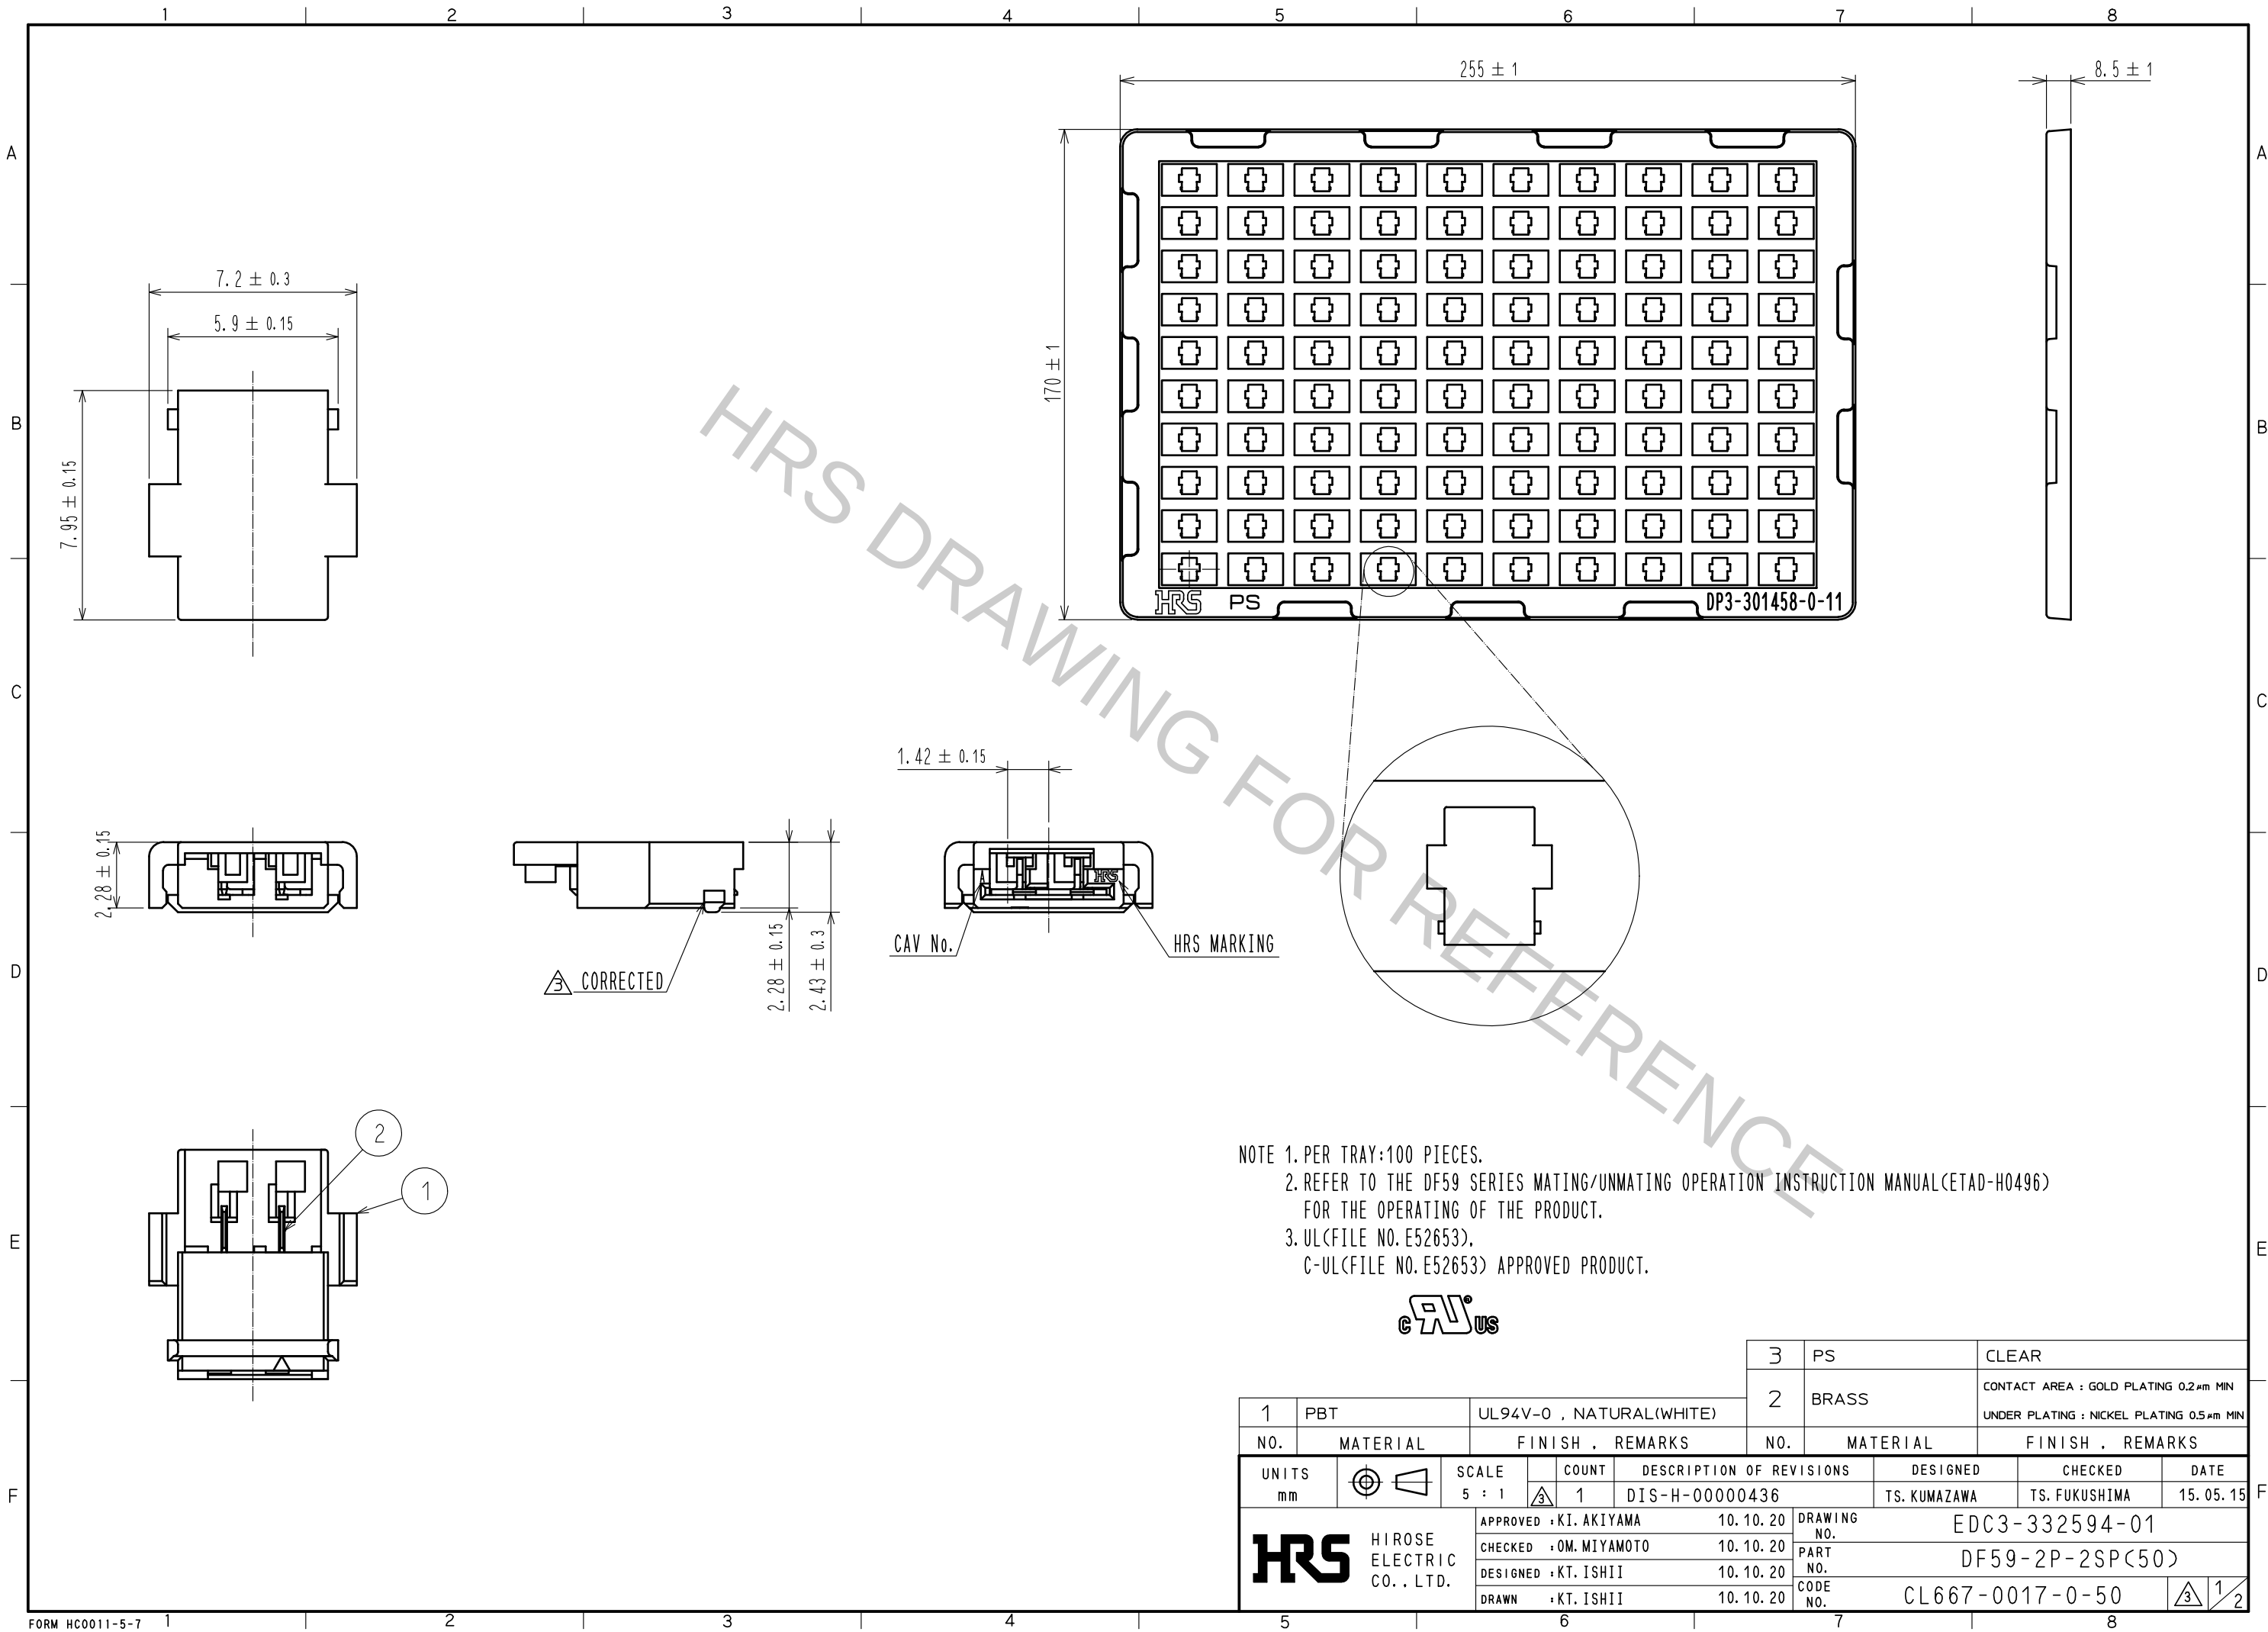

			3	PS	CLEAR
			2	BRASS	CONTACT AREA : GOLD PLATING 0.2μm MIN UNDER PLATING : NICKEL PLATING 0.5μm MIN
1	PBT	UL94V-0 , NATURAL(WHITE)			
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 5 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-H-00000436	DESIGNED TS. KUMAZAWA
			CHECKED TS. FUKUSHIMA		
			DATE 15. 05. 15		
			DRAWING NO. EDC3-332594-01		
			PART NO. DF59-2P-2SP(50)		
			CODE NO. CL667-0017-0-50		

HRS

HIROSE
ELECTRIC
CO., LTD.

APPROVED : KI. AKIYAMA 10. 10. 20
CHECKED : OM. MIYAMOTO 10. 10. 20
DESIGNED : KT. ISHII 10. 10. 20
DRAWN : KT. ISHII 10. 10. 20

DRAWING NO. EDC3-332594-01
PART NO. DF59-2P-2SP(50)
CODE NO. CL667-0017-0-50


Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.

Operation Procedures for Crimp Socket

【 Mating 】


1. By positioning the convexity of the short circuit pin sides to the receptacle concavity, align the centers of the short circuit pin and the receptacle in pitch direction.

2. Press down at the center surface of short circuit pin.
Note>Press down until the short circuit pin touches to the receptacle.

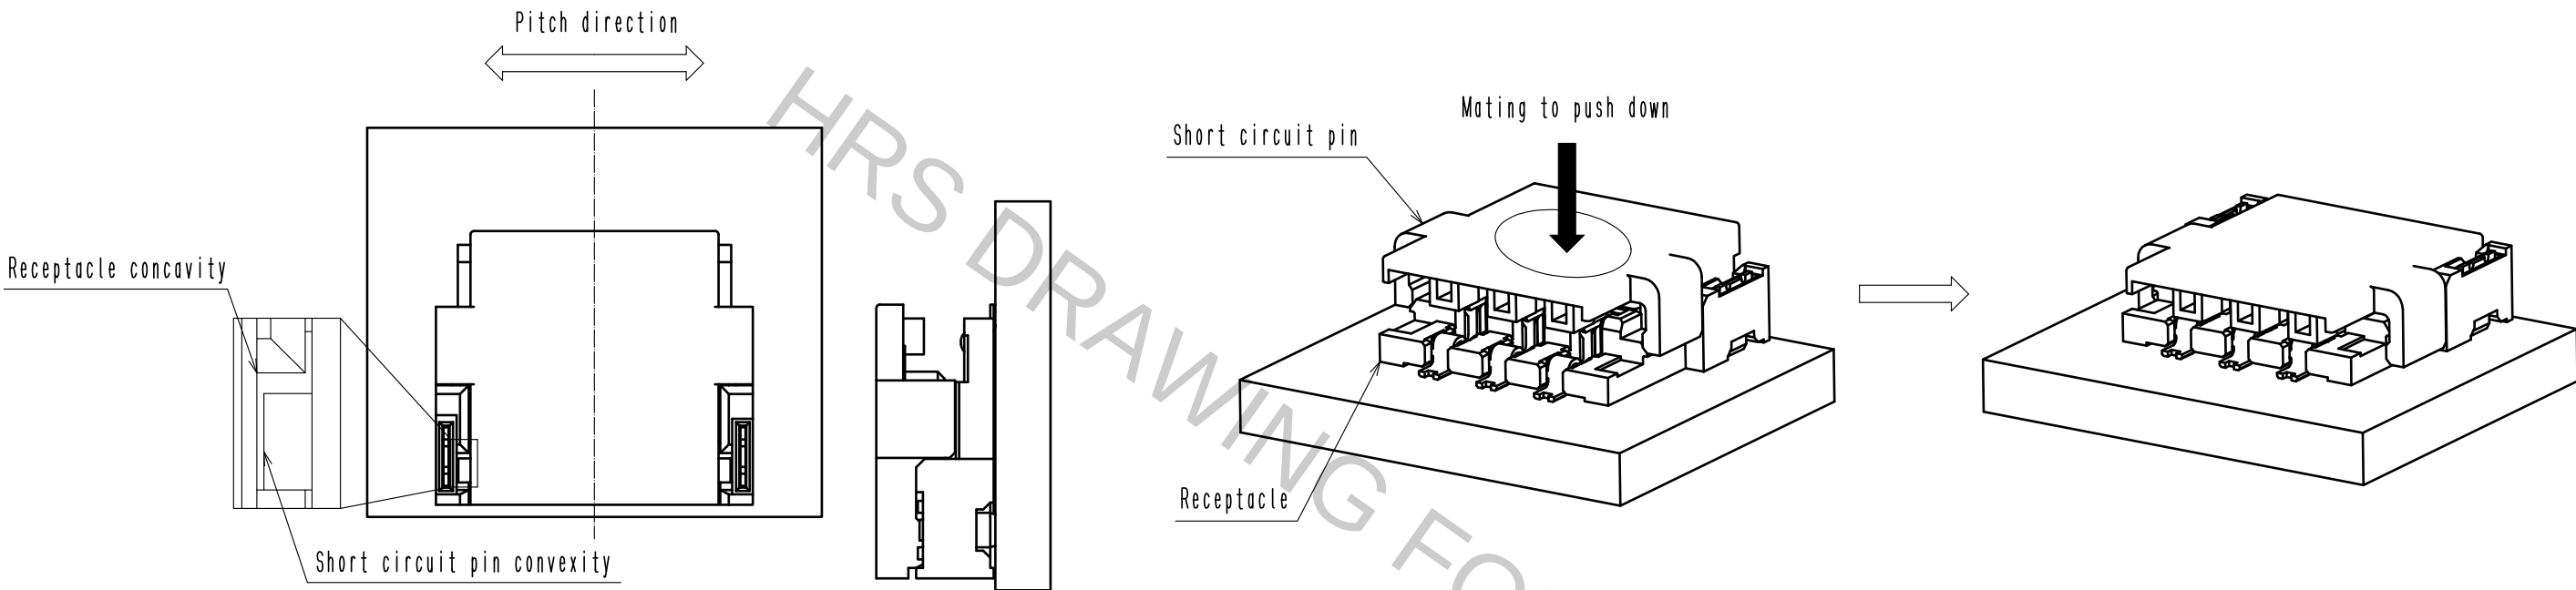

【 Unmating 】

1. Hook the lever with finger and lift up to the upper direction for unlock.

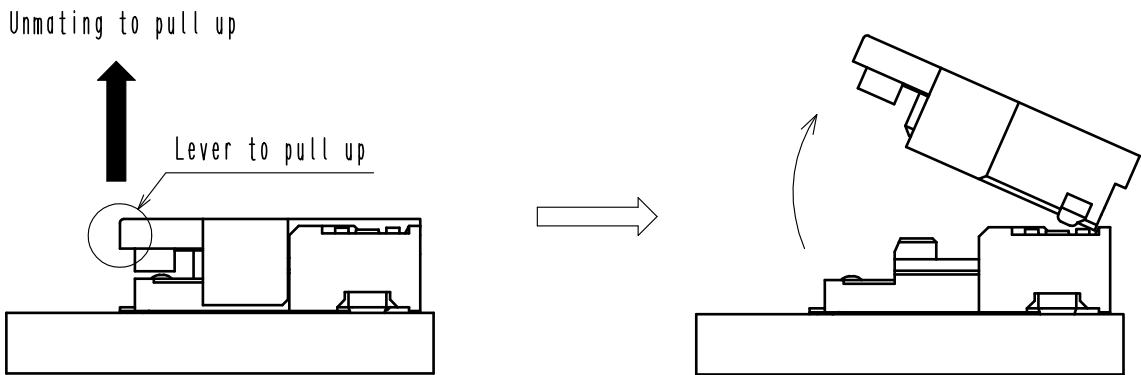

HRS

図番: EDC3-332594-01
製品名: DF59-2P-2SP<50>
製品コード: CL667-0017-0-50

3/2