


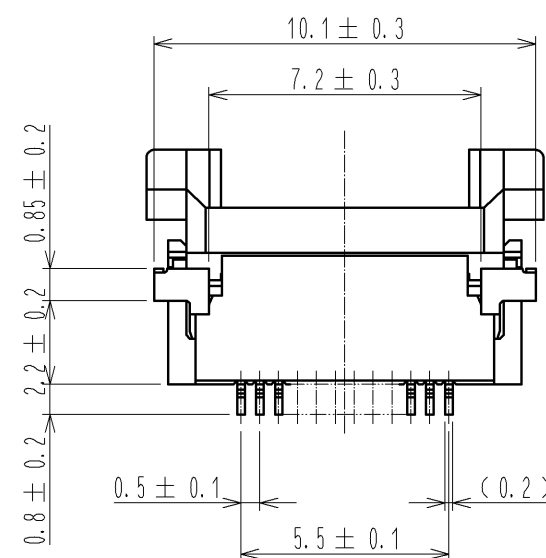


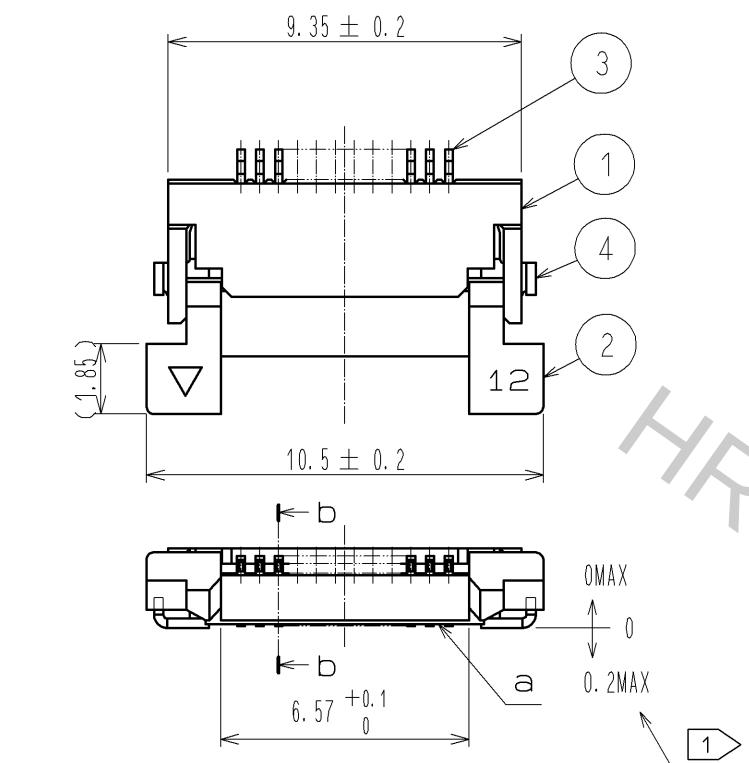


b-b (10 : 1)

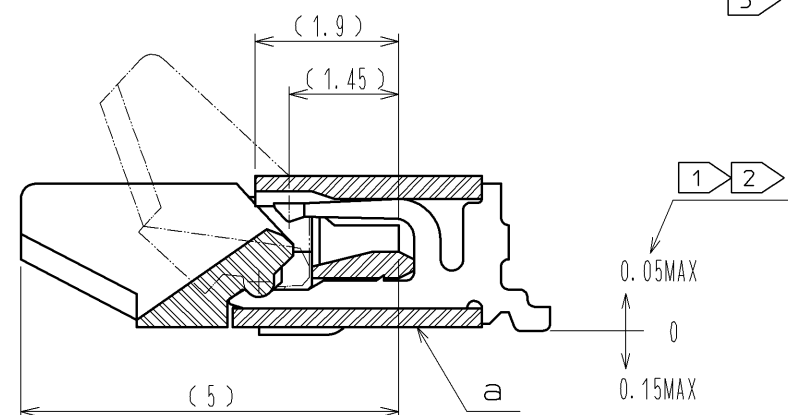

NOTE 1 REFERENCE IS a.
2 LEAD CO-PLANARITY SHALL BE 0.1 MAX.
3 THICKNESS OF SUPPORTING TAPE SHALL BE 0.188(7.5mil) MIN.

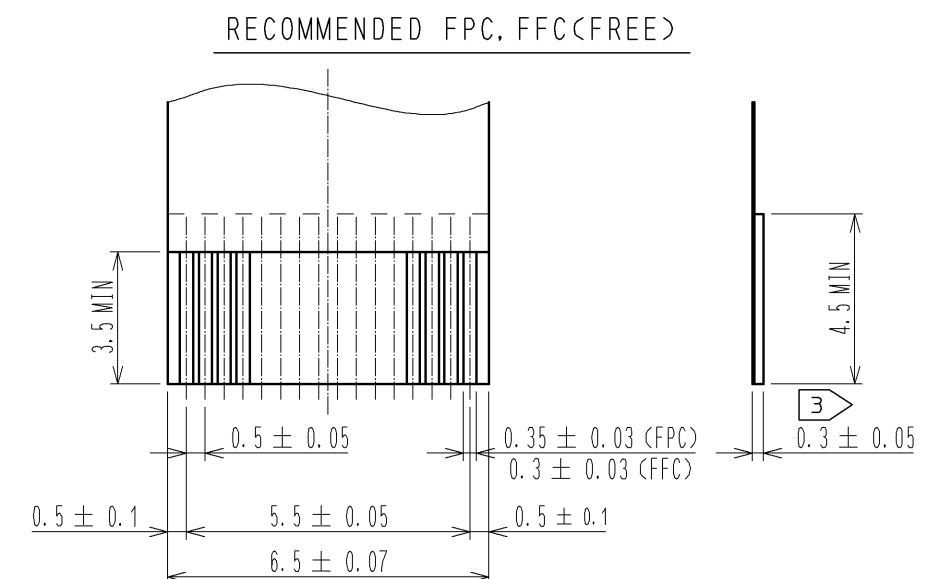


RECOMMENDED LAND PATTERN, METAL MASK (FREE)

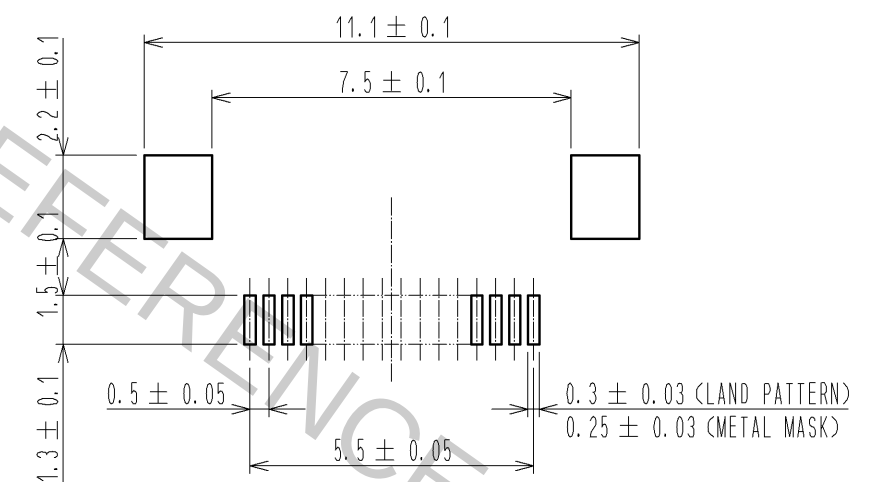RECOMMENDED METAL MASK THICKNESS $t=0.15$

4	BRASS	TIN PLATING 1μMIN OVER NICKEL 1μMIN.	8	(CONNECTOR)			
3	PHOSPHOR BRONZE	GOLD PLATING 0.05μMIN OVER NICKEL 1μMIN.	7	POLYSTYRENE			
2	PPS	DEEP BROWN UL94V-0	6	POLYESTER			
1	POLYAMIDE	BEIGE UL94V-0	5	POLYSTYRENE			
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS	

UNITS mm		SCALE 5 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-F-003410	DESIGNED MK. YASUMI	CHECKED FN. TAMURA	DATE 09.12.11
HRS HIROSE ELECTRIC CO., LTD.					APPROVED :RI. TAKAYASU 08.09.02	DRAWING NO. EDC3-152957-51		
					CHECED :HS. SAKAMOTO 08.09.01			
					DESIGNED :MK. YASUMI 08.08.26	CODE NO. CL586-0696-4-55		
					DRAWN :MK. YASUMI 08.08.26	1 2		



EMBOSSED CARRIER TAPE DIMENSION(2:1)

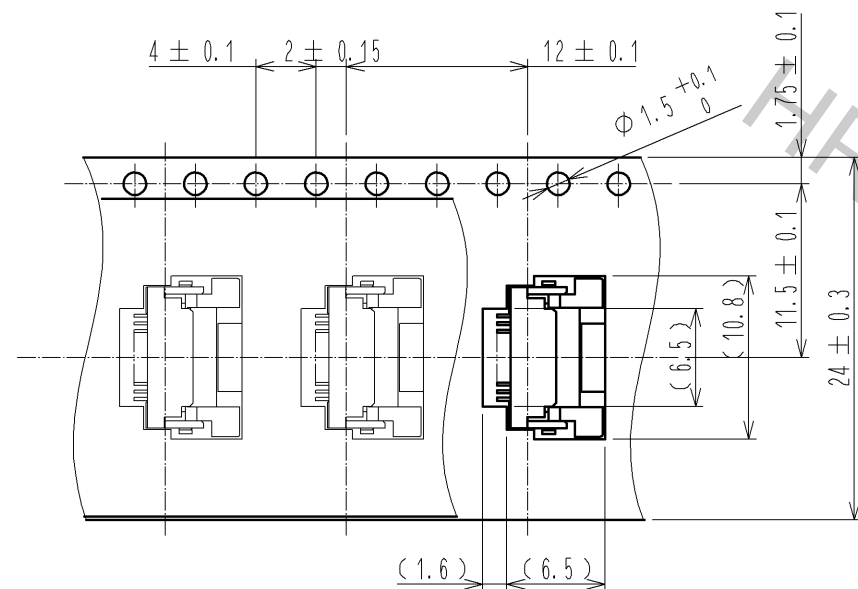

→
DIRECTION OF UNREELING



REEL DIMENSION(FREE)

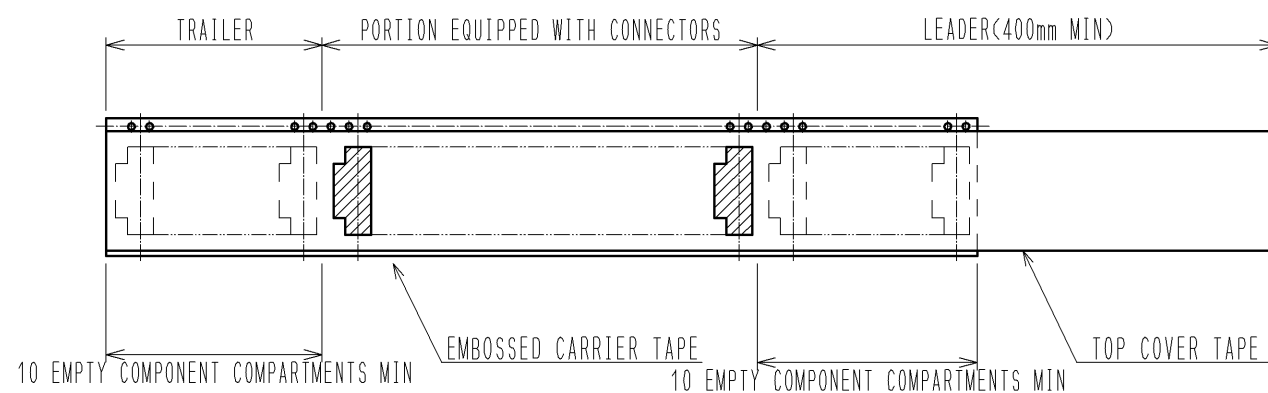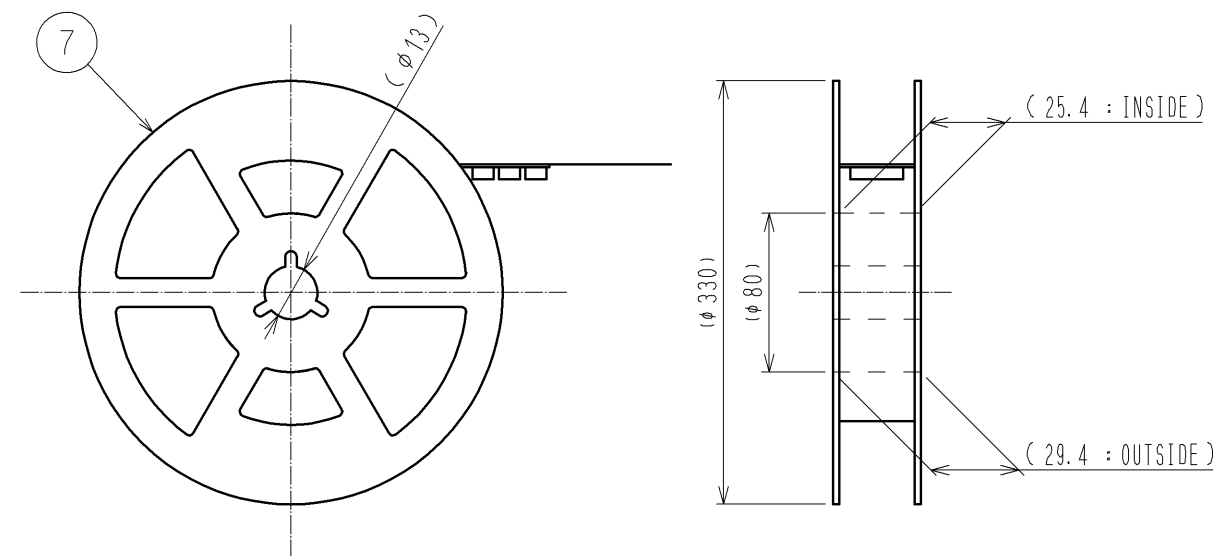

NOTE 4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
5 1 REEL:2000 CONNECTORS.

<DRAWING FOR PACKING>

HRS

DRAWING NO.	EDC3-152957-51
PART NO.	FH12A-12S-0.5SH(55)
CODE NO.	CL586-0696-4-55

2/2