



Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.

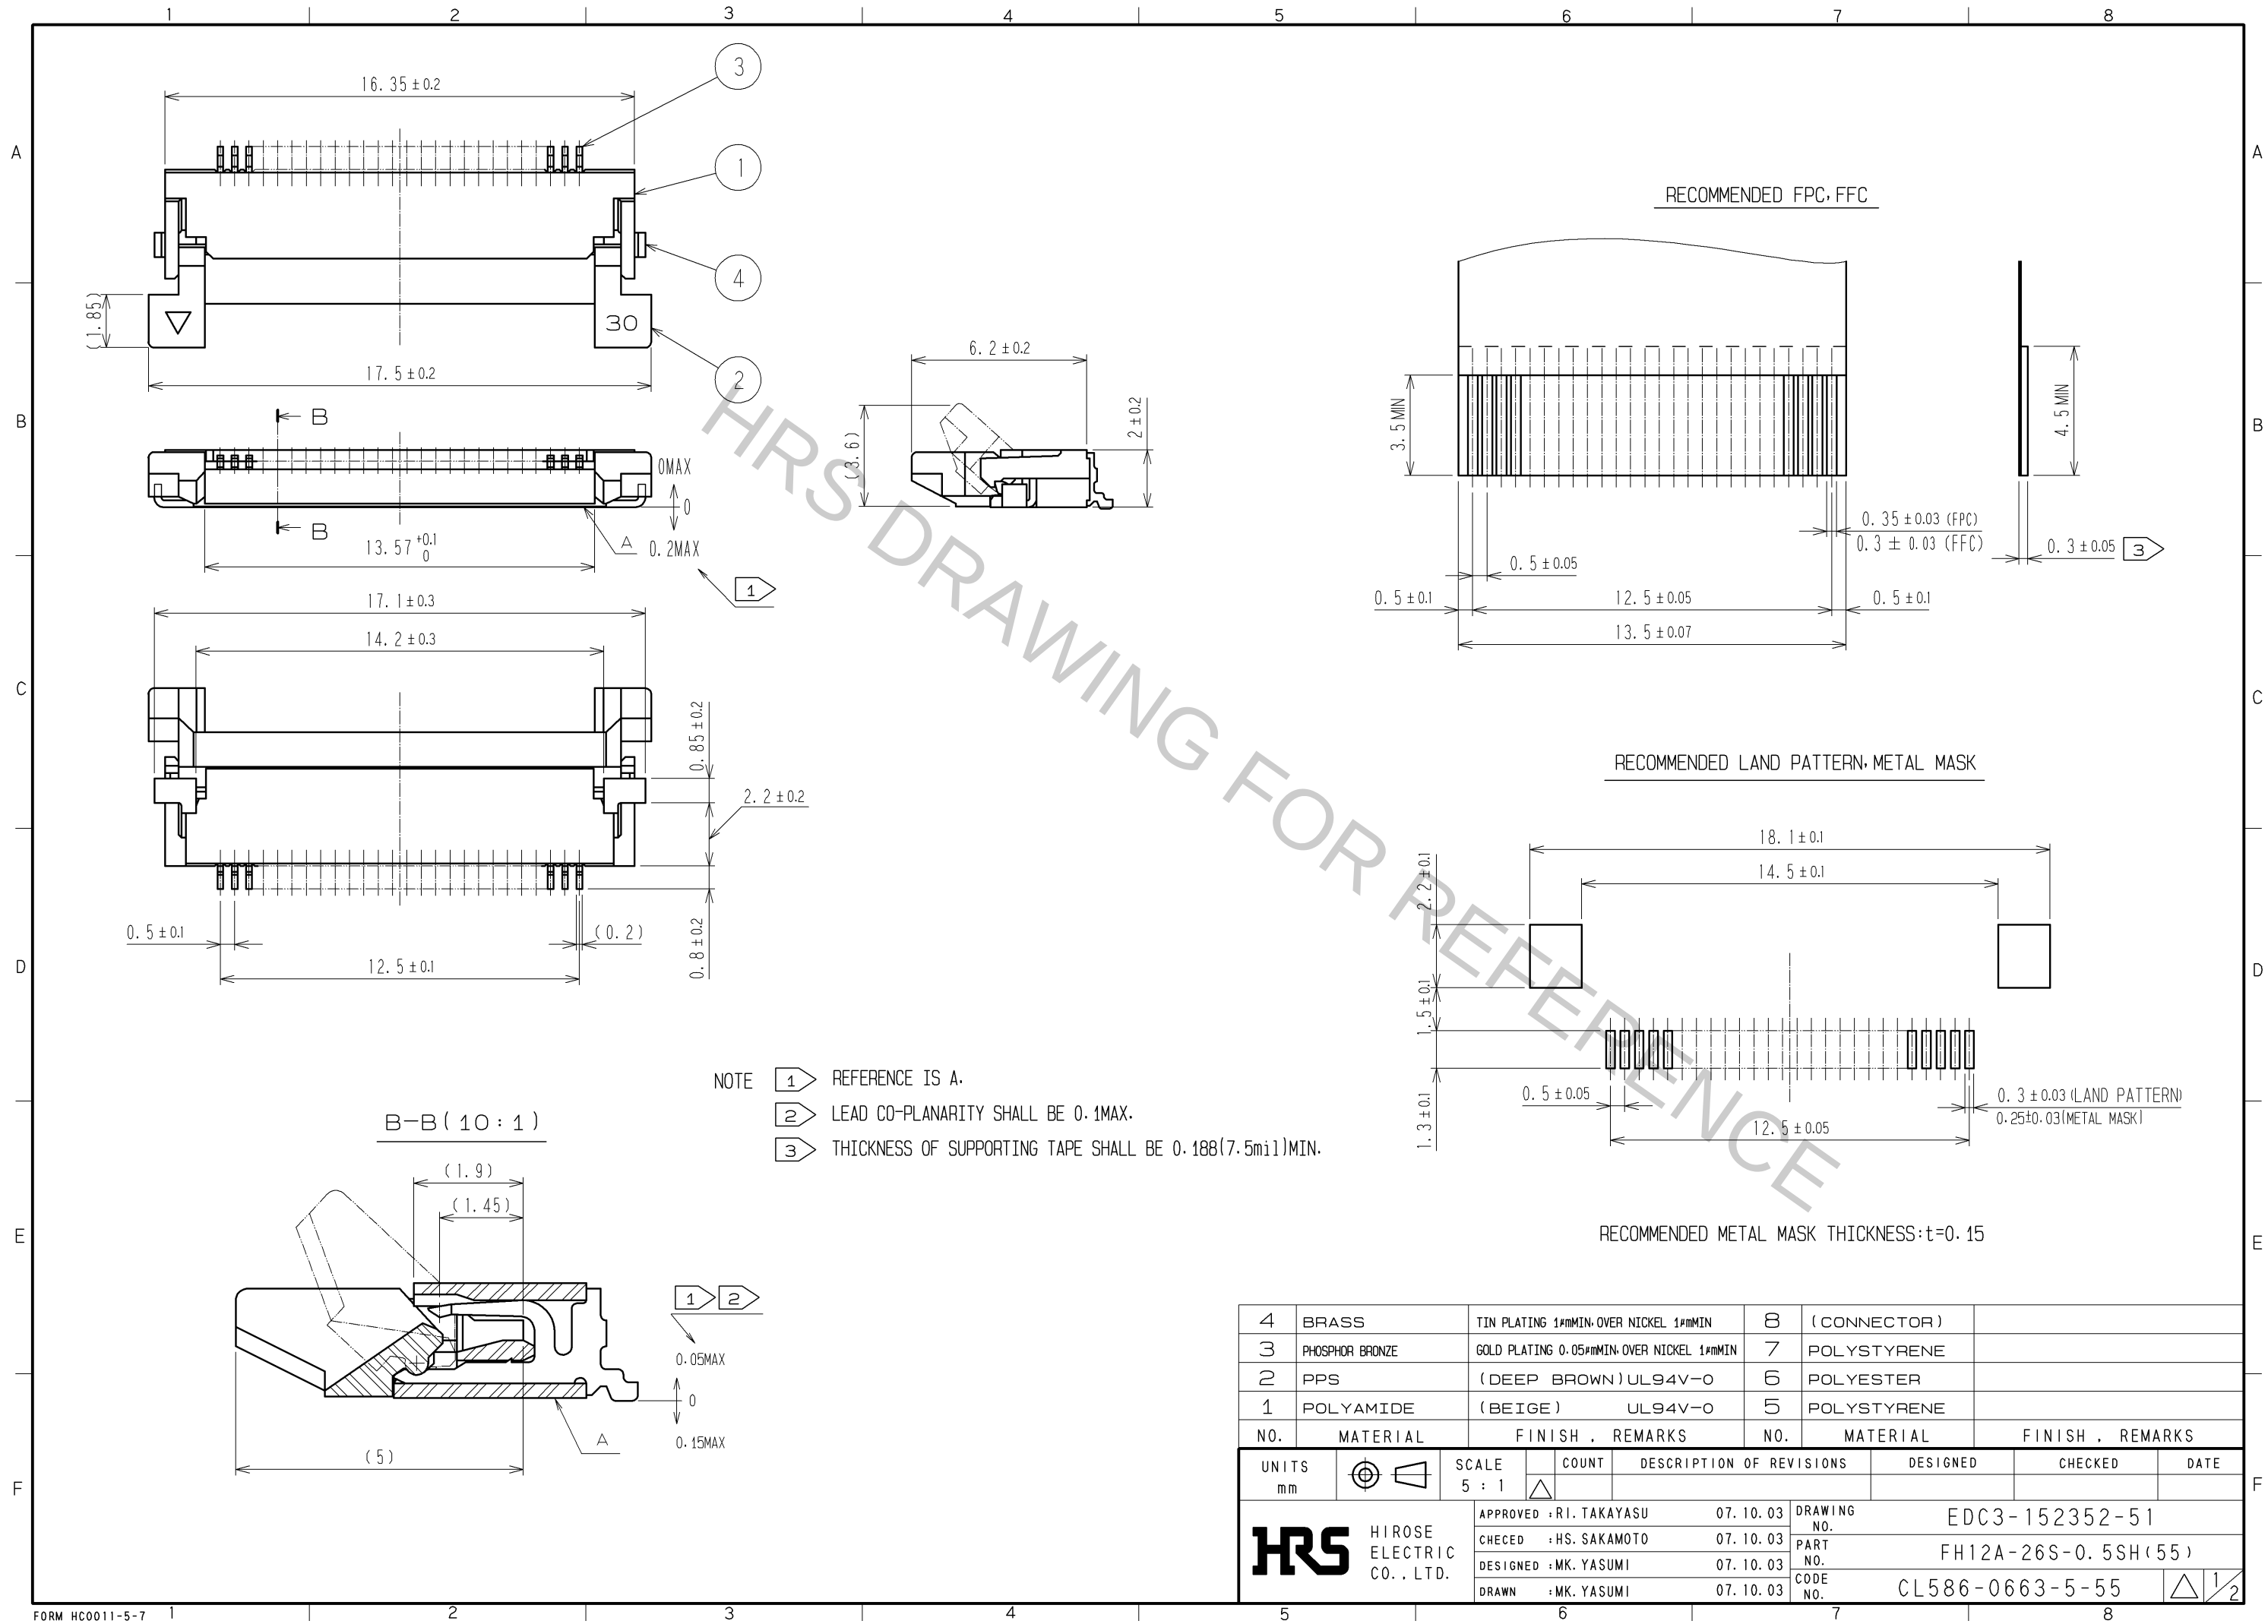

NOTE 1 REFERENCE IS A.
2 LEAD CO-PLANARITY SHALL BE 0.1MAX.
3 THICKNESS OF SUPPORTING TAPE SHALL BE 0.188(7.5mil)MIN.

B-B (10:1)

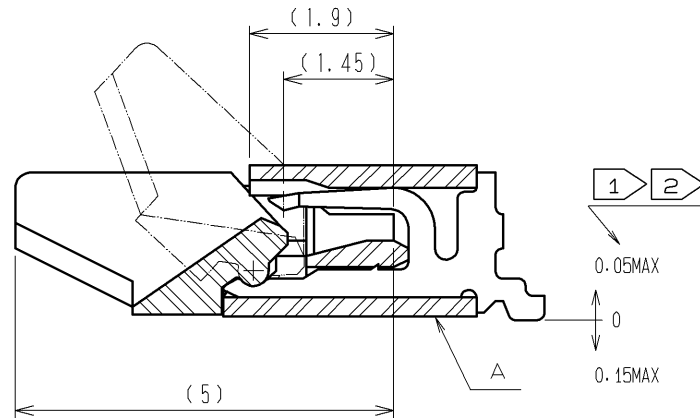

4	BRASS	TIN PLATING 1#MIN. OVER NICKEL 1#MIN	8	(CONNECTOR)	
3	PHOSPHOR BRONZE	GOLD PLATING 0.05#MIN. OVER NICKEL 1#MIN	7	POLYSTYRENE	
2	PPS	(DEEP BROWN) UL94V-0	6	POLYESTER	
1	POLYAMIDE	(BEIGE) UL94V-0	5	POLYSTYRENE	
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS	mm	SCALE	5:1	COUNT	DESCRIPTION OF REVISIONS
DESIGNED	HS. SAKAMOTO	07.10.03	CHECKED	HS. SAKAMOTO	07.10.03
DRAWN	MK. YASUMI	07.10.03	APPROVED	RI. TAKAYASU	07.10.03
DRAWING NO.	EDC3-152352-51	PART NO.	FH12A-26S-0.5SH(55)	CODE NO.	CL586-0663-5-55

Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.

