


Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case that the application demands a high level of reliability, such as automotive,
 please contact a company representative for further information.

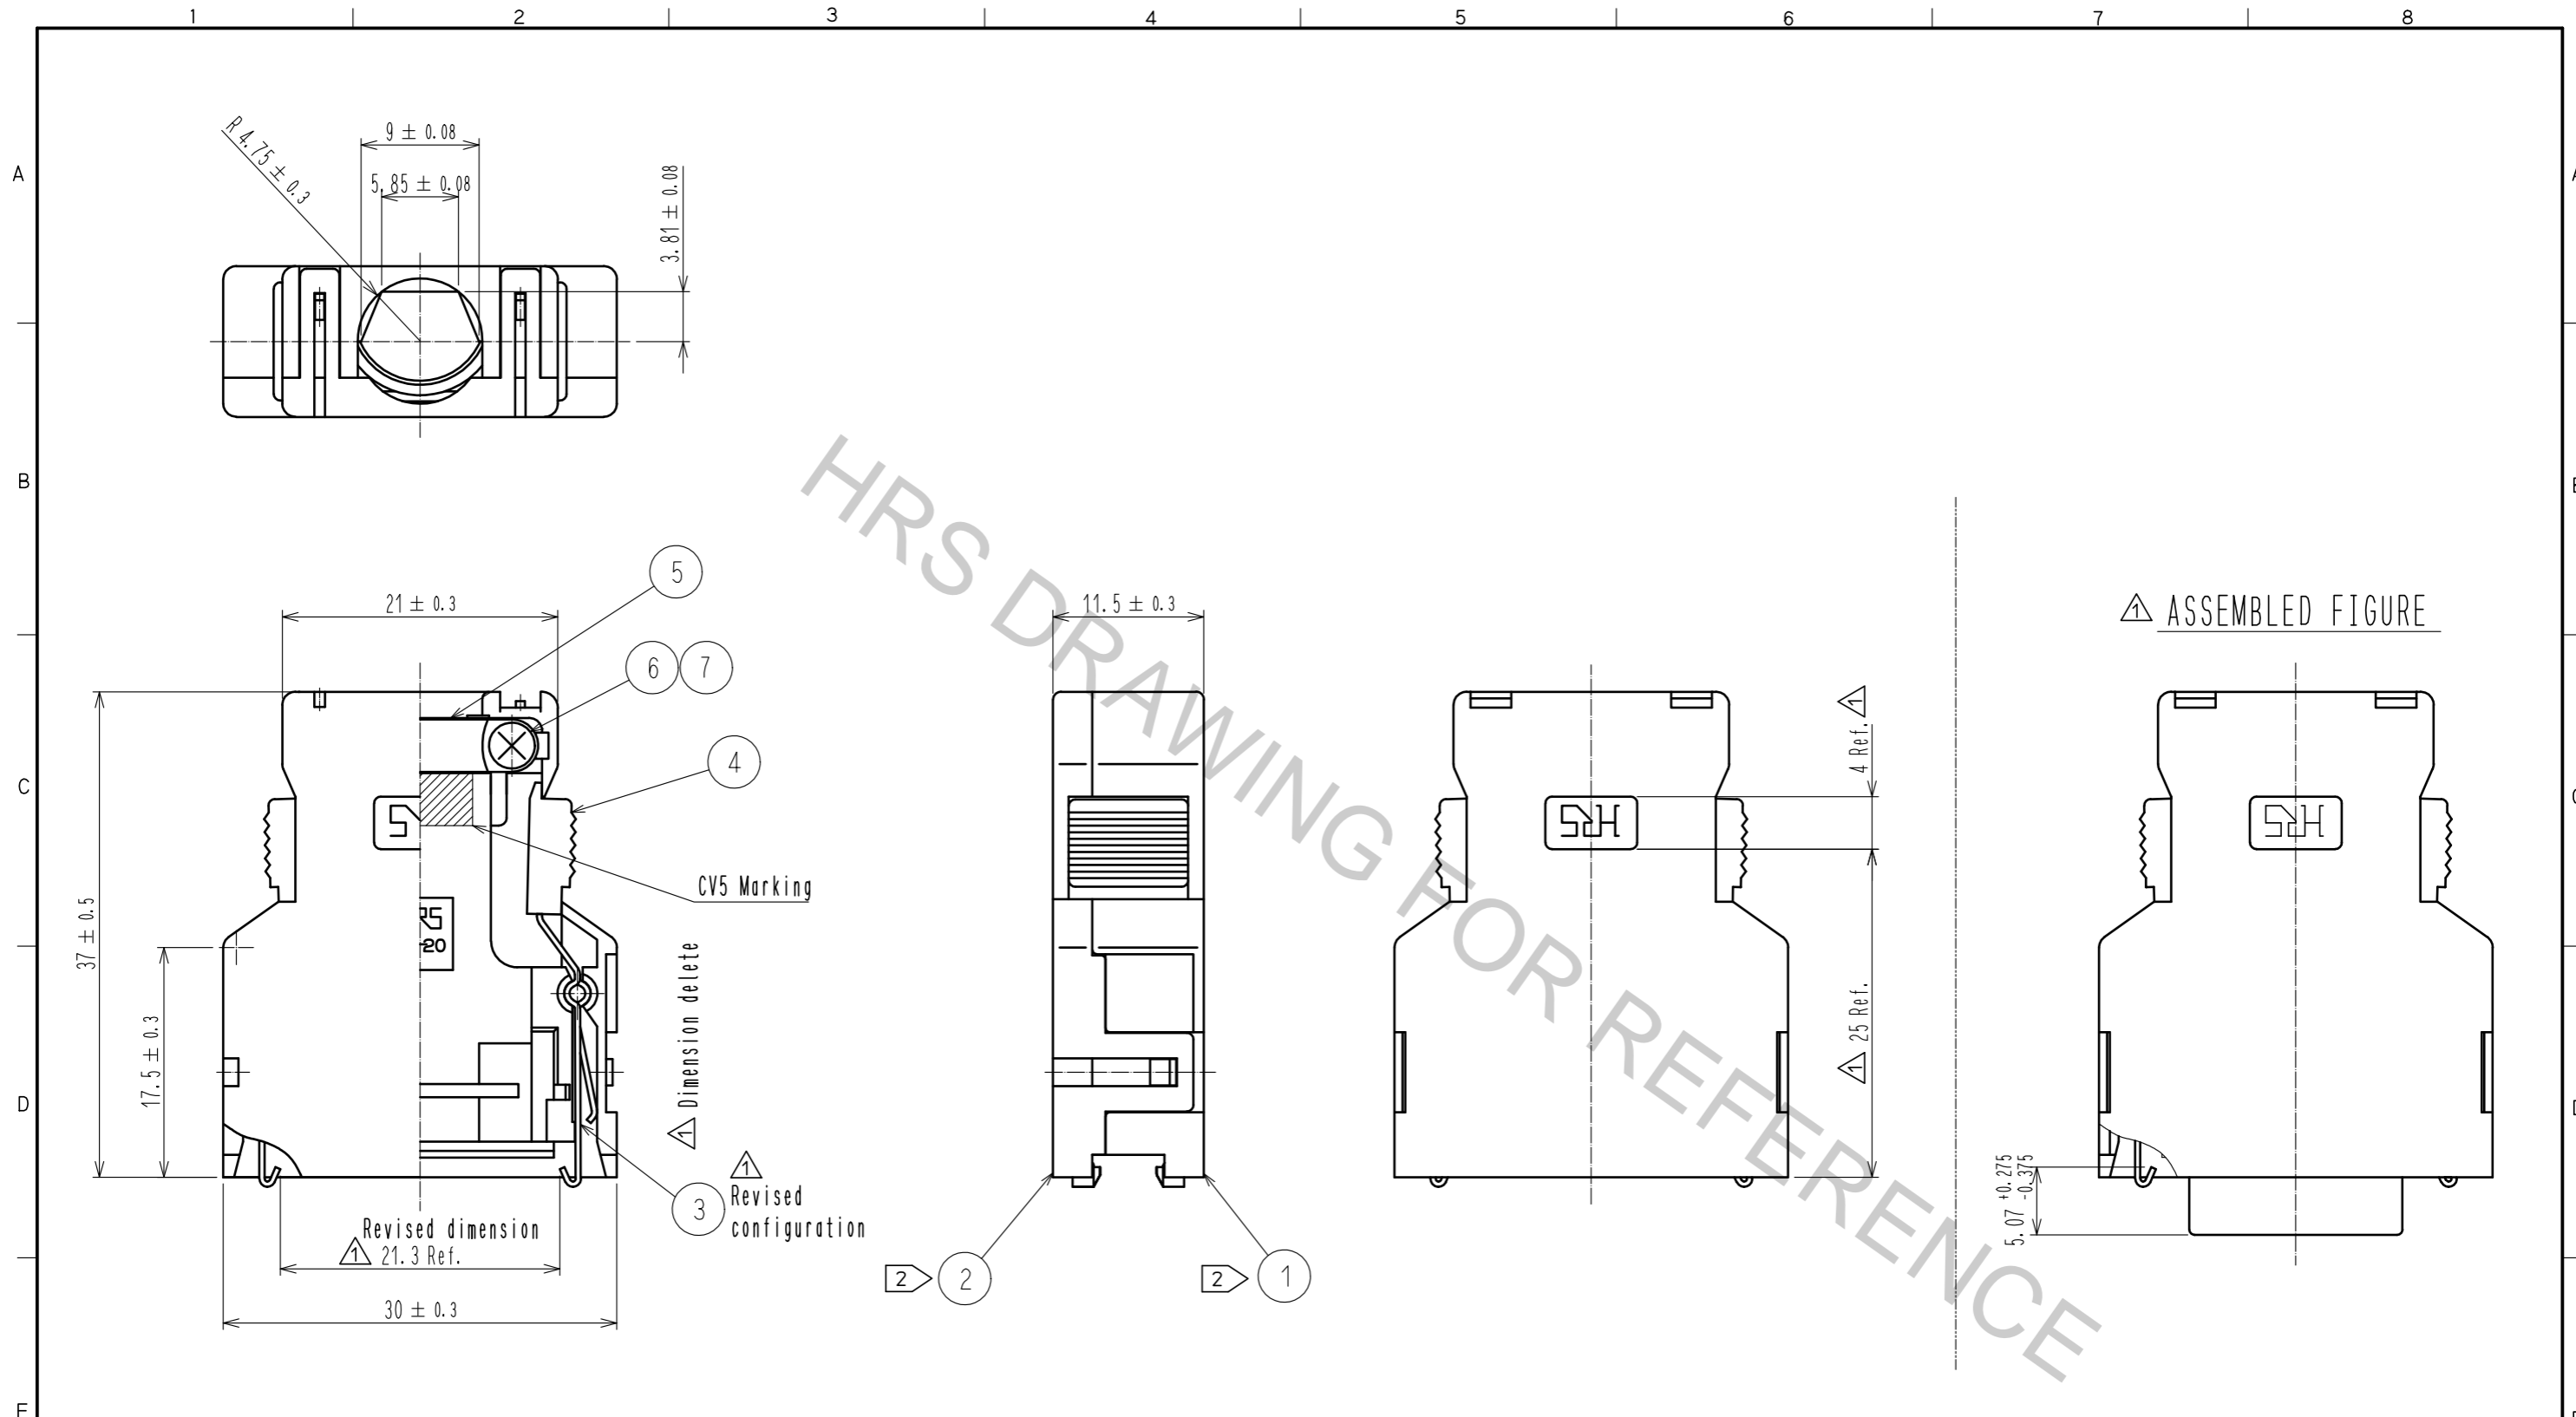

- Note**
1. Outer surface of cover case part no. ① and ② are matte finished equivalent to TH-117 (Tanazawa hakkosha Co., Ltd.). Except around the ditch of HRS mark.
 2. Part no. ③, ④, ⑤, ⑥, ⑦ are assembled into part no. ①. Part no. ① and ② are not assembled when delivered.
 3. Outer diameter of applicable cable shall be $\phi 9.2 \pm 0.3$.

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
4	Polycarbonate	Gray . UL94V-0			
3	Stainless steel		7	Brass	Nickel plating $0.8 \mu\text{m}$ Min.
2	Polycarbonate	Gray . UL94V-0	6	Brass	Nickel plating $0.8 \mu\text{m}$ Min.
1	Polycarbonate	Gray . UL94V-0	5	Stainless steel	

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	7	DIS-E-00001548	P. EKSOURIYA	AH. KODAMA	18. 07. 09

APPROVED	CHECKED	DESIGNED	DRAWN	DRAWING NO.	PART NO.	CODE NO.
HO. MIWA	YH. ENAMI	TU. TANIGUCHI	YK. SATO	EDC-120074-50-01	FI-20-CV5(50)	CL230-0515-9-50