



Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.

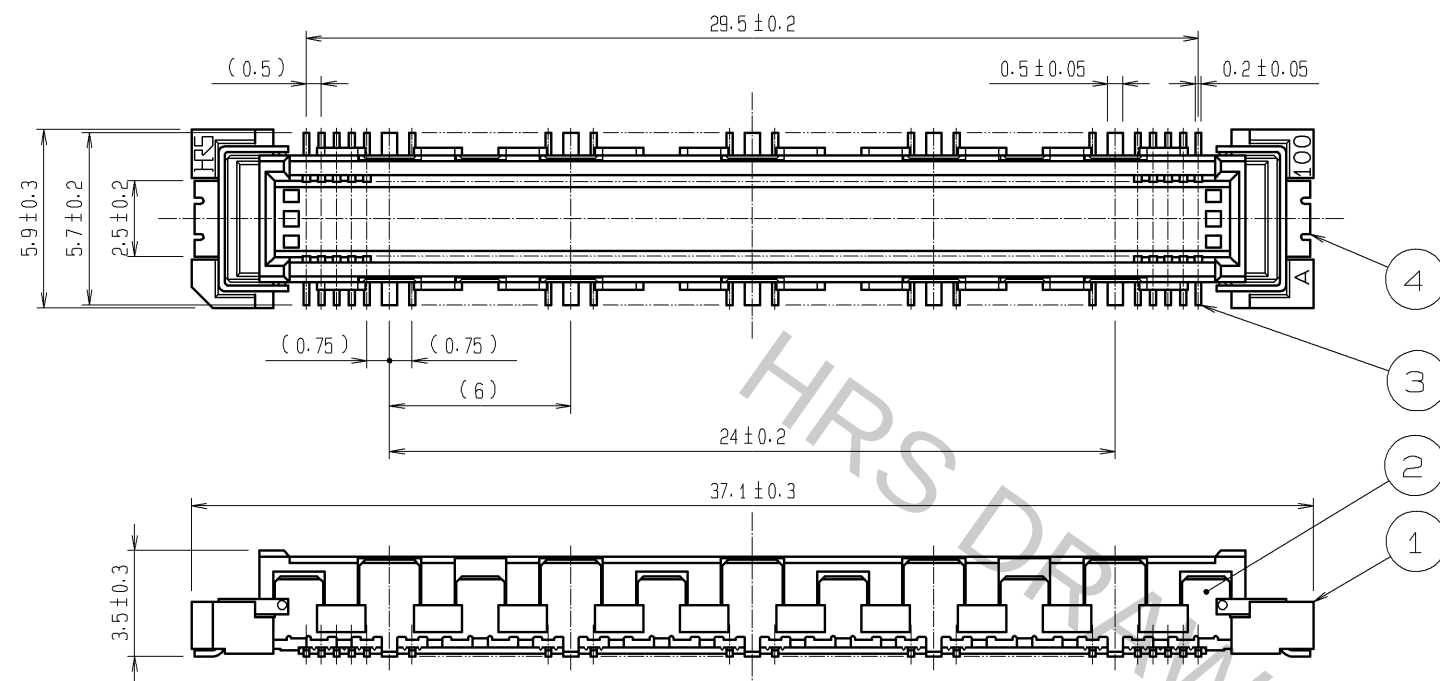




RECOMMENDED LAND PATTERN DIMENSION OF PCB
(RECOMMENDED METAL MASK THICKNESS: 0.15mm)

CROSS CUT SECTION - SIGNAL (5:1)

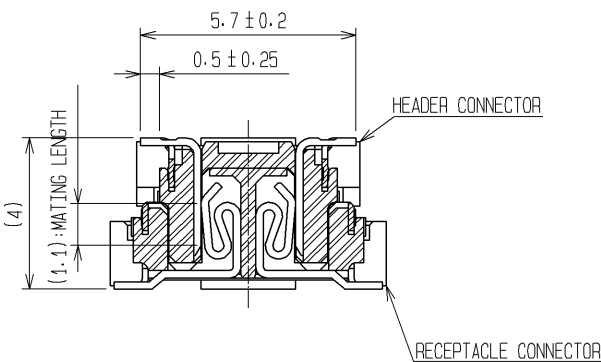

CROSS CUT SECTION - GROUND (5:1)

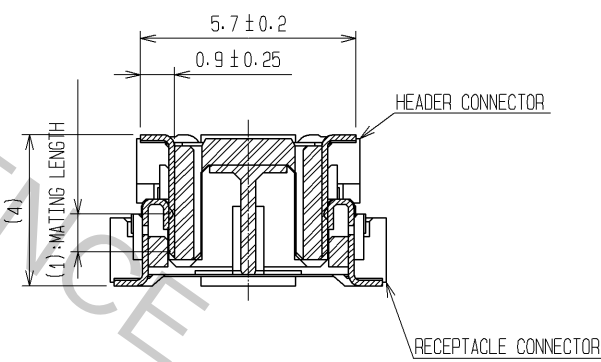

- NOTES
- ① 10 HATCHED  PARTS: GROUND CIRCUIT.
 - ② 2 HATCHED  PARTS: GROUND CIRCUIT.
 - 3 SMT LEAD-COPLANARITY: 0.1 MAX.
 - 4 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - ⑤ MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED  AREA.)
 - 6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

2	PHOSPHOR BRONZE	TIN-PLATING	3	PHOSPHOR BRONZE	TIN-PLATING
	LCP	BEIGE UL94V-0		PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.1μm min.
					LEAD AREA: TIN-PLATING 1μm min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS mm		SCALE 4 : 1	COUNT △		DESCRIPTION OF REVISIONS
DESIGNED		CHECKED		DATE	
APPROVED : HS. OKAWA		08.06.26		DRAWING NO. EDC3-151949-25	
CHECED : HT. YAMAGUCHI		08.06.25		PART NO. FX10B-100P/10-SV<71>	
DESIGNED : SY. KAMIGA		08.06.23		CODE NO. CL570-0022-5-71	
DRAWN : HK. SUNADORI		08.06.17		△ 1/1	