

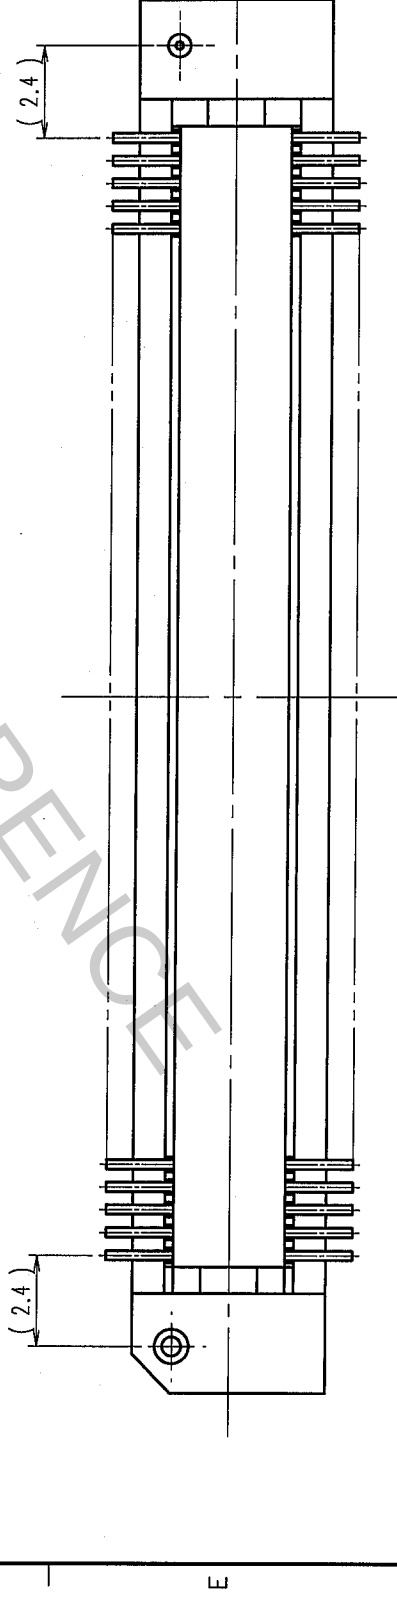
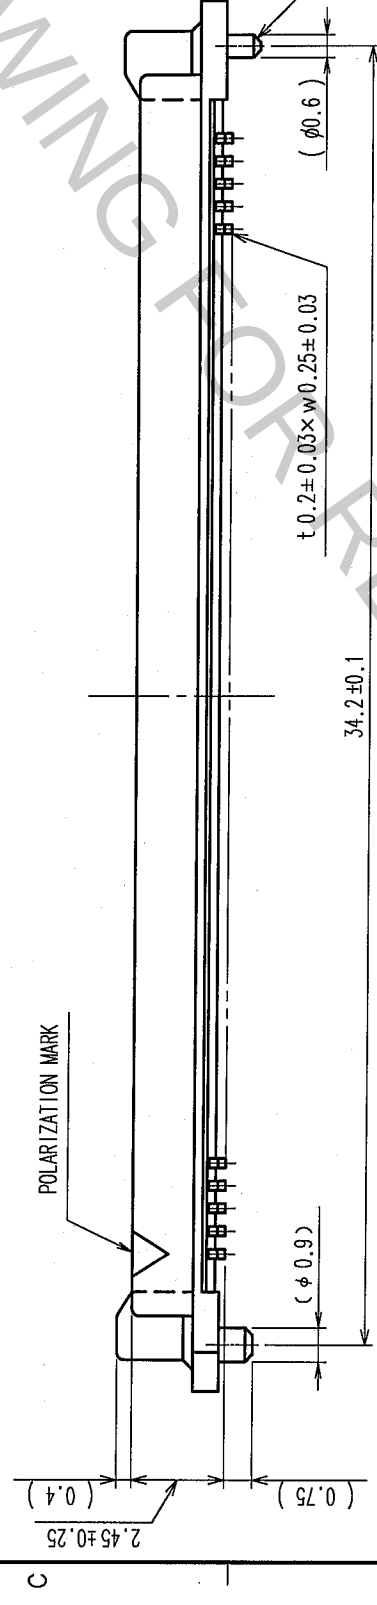
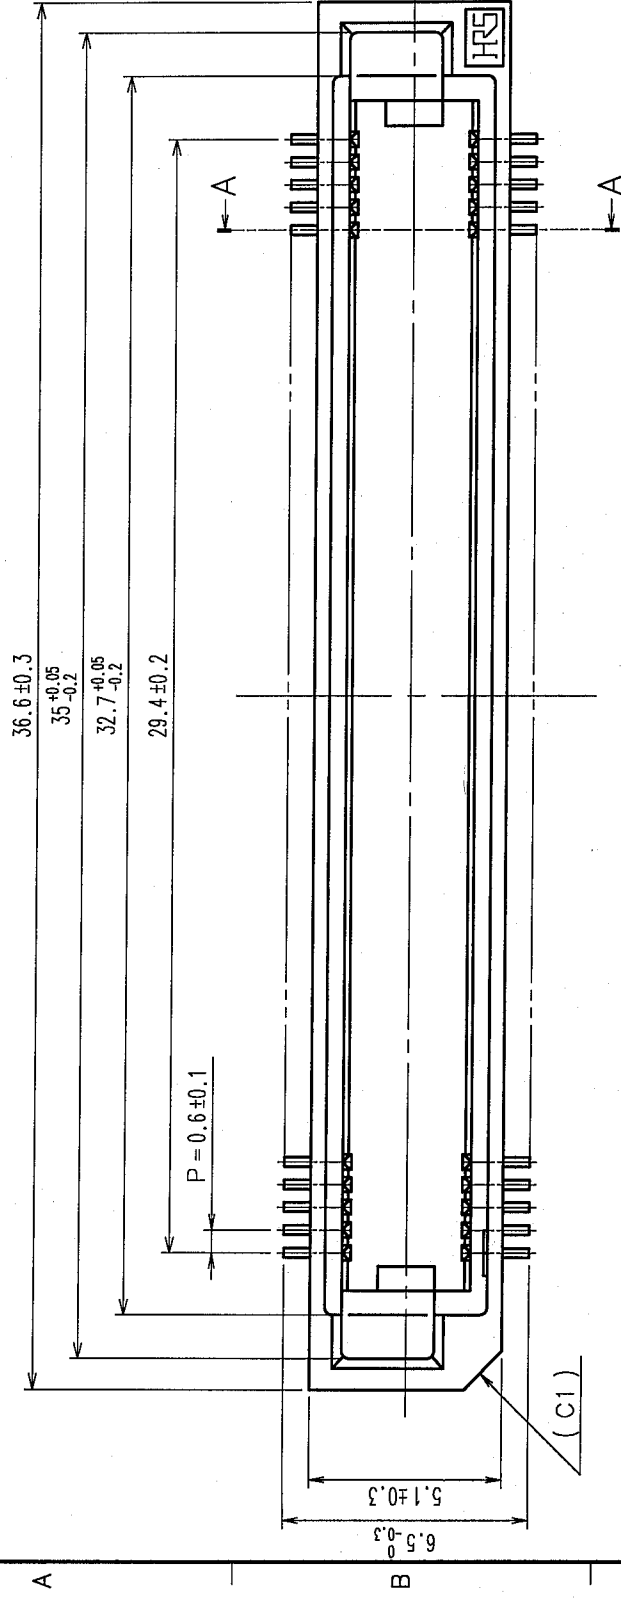


in case that the application demands a high level of reliability, such as automotive, please contact a company representative for further information of revision.

DATE	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△			..	△				..
△			..	△				..
△			..	△				..

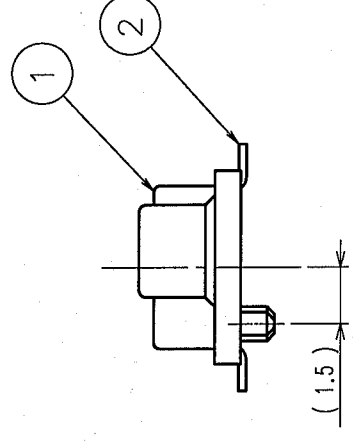

RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE) (2:1)

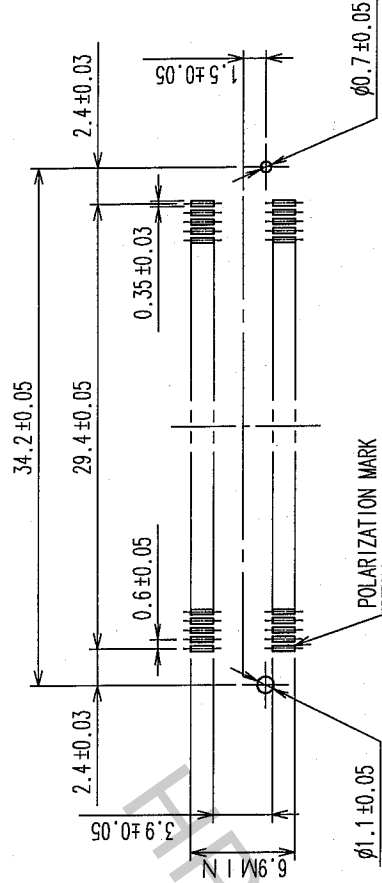

POLARIZATION MARK

A-A

NOTE 1. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.

2. FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.

3. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

1	POLYPHENYLENE SULFIDE	LIGHT BROWN (UL94V-0)	2	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.1 μ m min. LEAD AREA: GOLD FLASH UNDER PLATING: NICKEL 0.5 μ m min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
	H. Doi '05-09-02	H. Doi '05-09-02	K. Ogawa '05-09-02	H. Okawa 05-09-02	.

	DRAWING NO.		PART NO.	FX8-100P-SV(71)	1/2
	EDC3-150566-25				
SCALE	5 : 1		CODE NO.	CL578-0005-7-71	
UNITS	mm				
 HIROSE ELECTRIC CO., LTD					

TO	PCK			
----	-----	--	--	--