


In case that the application demands a high level of reliability, such as automotive,


DATE	BY	CHKD	DESCRIPTION OF REVISIONS	COUNT	DATE	BY	CHKD	DATE
11/1/00				1	11/1/00			11/1/00
11/1/00				1	11/1/00			11/1/00
11/1/00				1	11/1/00			11/1/00

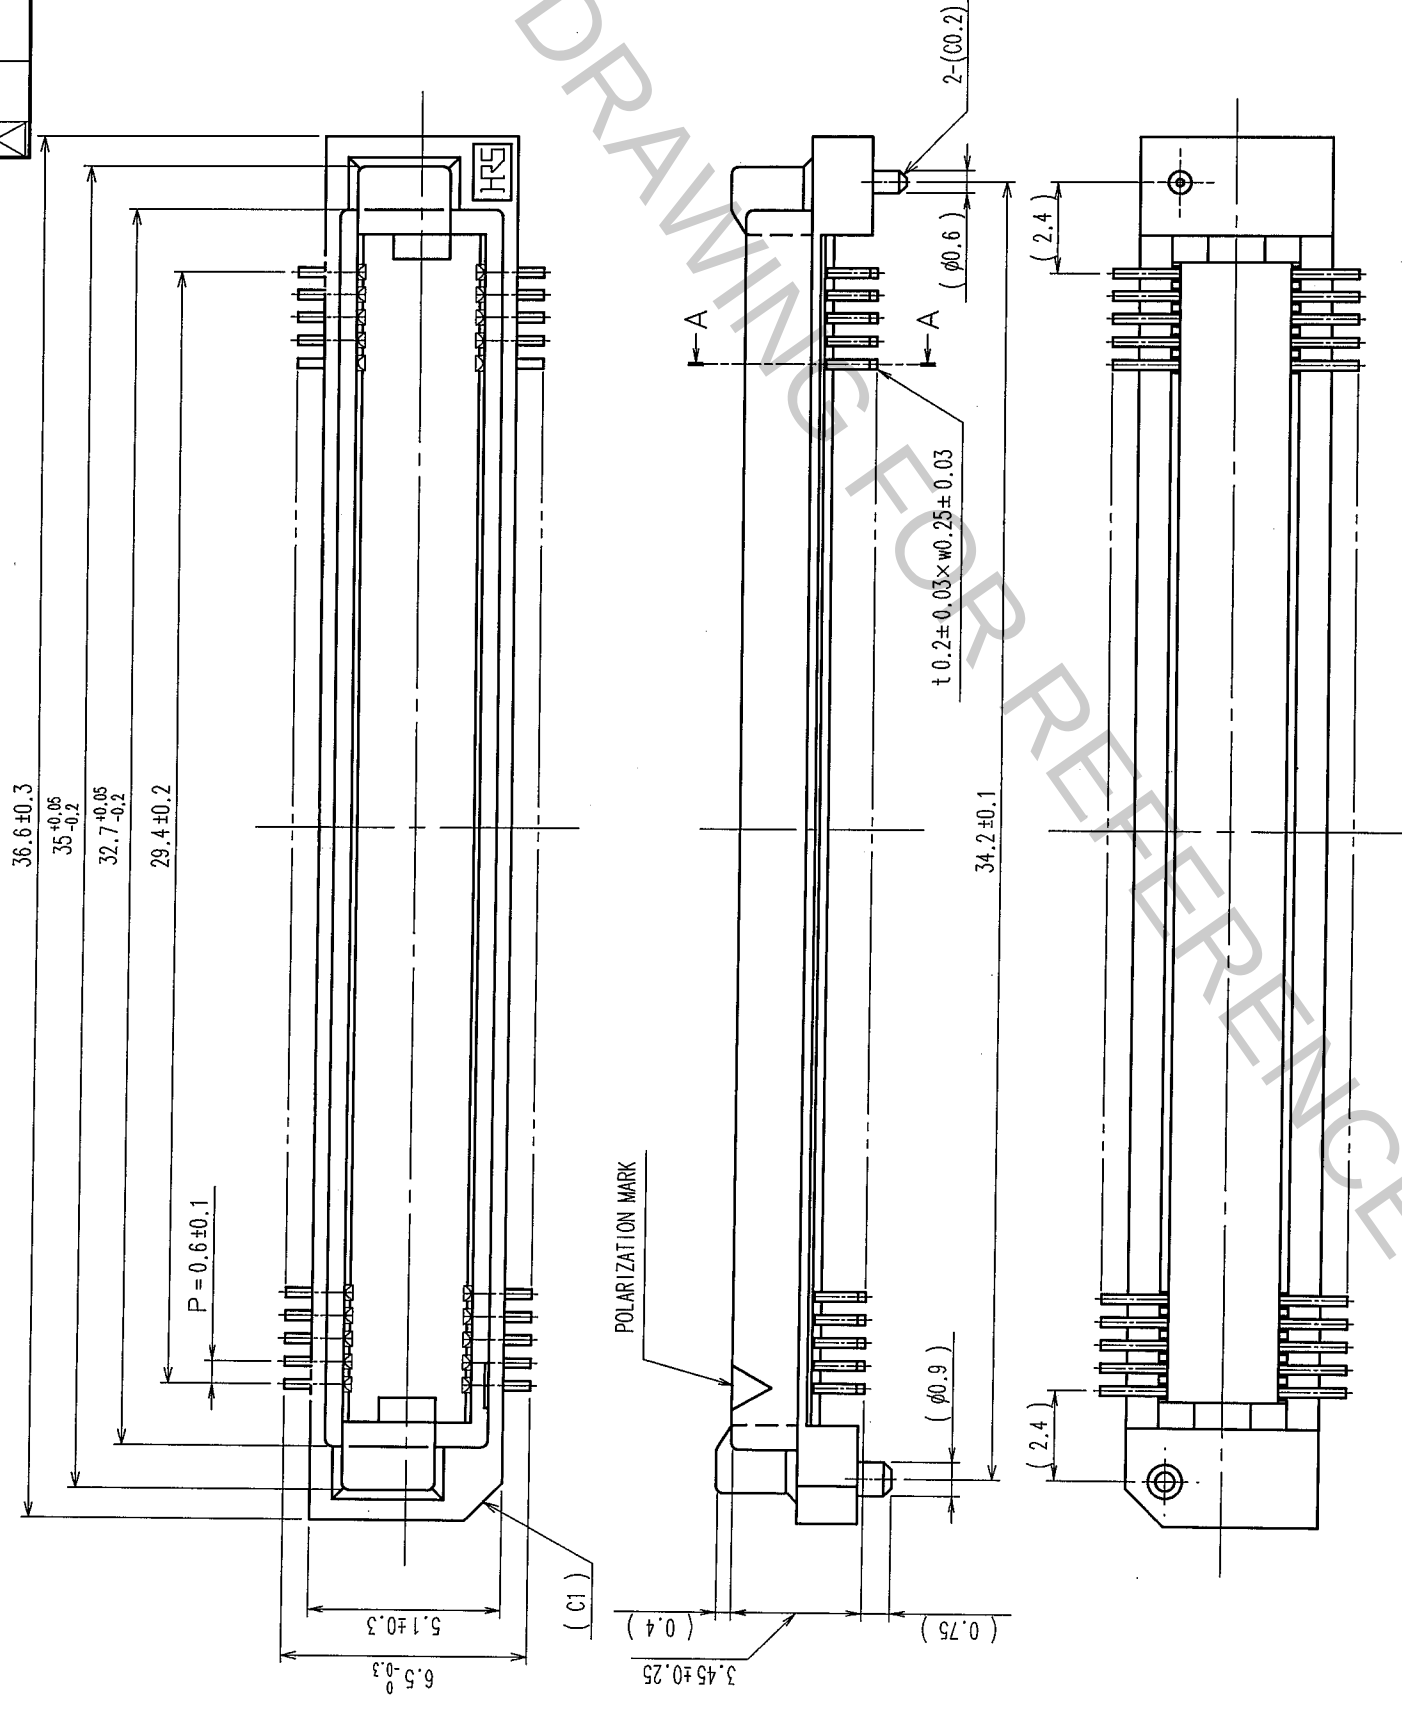

NOTE

- 1 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
- 2 TUBE PACKAGING SHALL BE APPLIED FOR THIS PRODUCT.
SEE NEXT PAGE FOR DETAILS.
- 3 FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE
ADDED ACCORDING TO CIRCUMSTANCES.
- 4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

RECOMMENDED P.C.B. LAND PATTERN (MOUNT SIDE) (2:1)

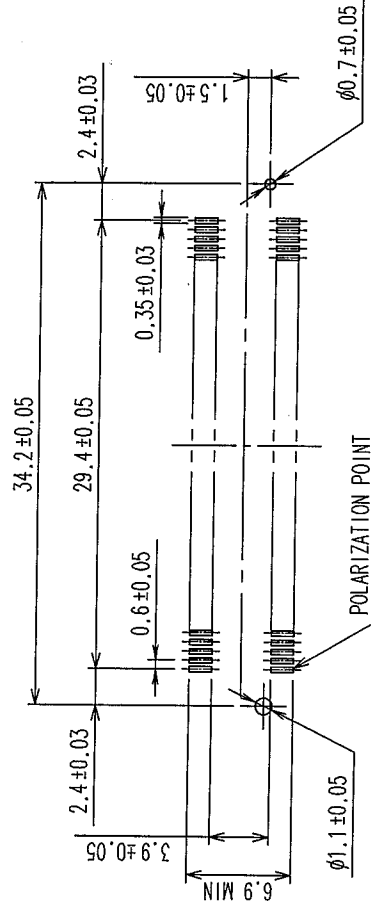

1	POLYPHENYLENE SULFIDE	LIGHT BROWN (UL94V-0)	2	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.1μ m min. LEAD AREA: TIN-PLATING 1μ m min. UNDER PLATING: NICKLE 1μ m min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD) CL		DRAWN	DESIGNED	CHECKED	APPROVED
		T. YANAGISAWA '05.10.11	J. Noda '05.10.11	J. Ogawa '05.10.11	H. Okawa '05.10.11
DRAWING NO. EDC3-150571-21		PART NO. FX8-100P-SV1 (91)			
SCALE 5 : 1					
UNITS mm	CODE NO. CL578-0045-1-91				
HRS		HIROSE ELECTRIC CO., LTD			
		1/2			

(7.2)

000000	000000	000000
--------	--------	--------

POLARIZATION MARK

3

TO				
----	--	--	--	--

5	6	7	8
---	---	---	---

FORM NO. 229