


Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case that the application demands a high level of reliability, such as automotive,
 please contact a company representative for further information.

1		2			3			4		
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	
△					△					
△					△					
△					△					

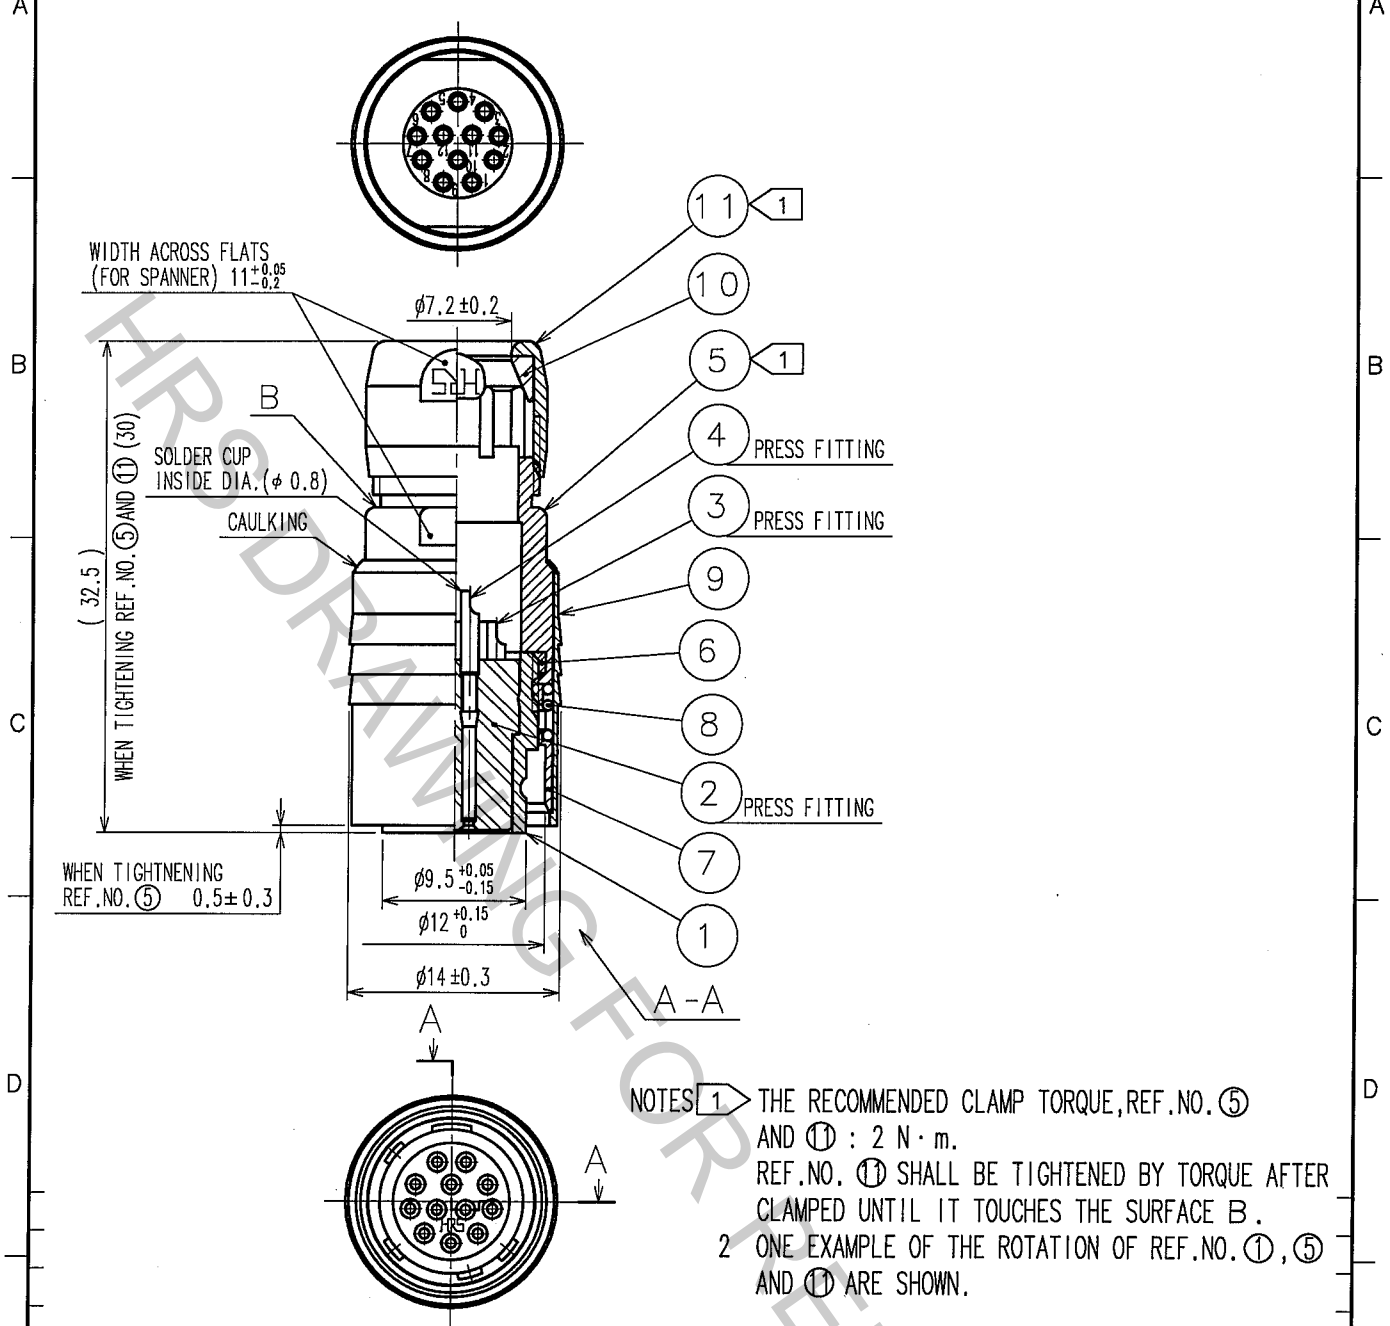

NOTES 1 THE RECOMMENDED CLAMP TORQUE, REF. NO. ⑤ AND ① : 2 N · m.
 REF. NO. ① SHALL BE TIGHTENED BY TORQUE AFTER CLAMPED UNTIL IT TOUCHES THE SURFACE B.
 2 ONE EXAMPLE OF THE ROTATION OF REF. NO. ①, ⑤ AND ① ARE SHOWN.

6	POLYAMIDE		11	BRASS	MATTE FINISH NICKEL PLATED
5	BRASS	MATTE FINISH NICKEL PLATED	10	POLYAMIDE	
4	COPPER ALLOY	GOLD PLATING 0.2μ m min.	9	BRASS	MATTE FINISH NICKEL PLATED
3	COPPER ALLOY	NICKEL UNDER PLATING 2μ m min.	8	STEEL	NICKEL PLATING
2	POLYAMIDE	(BLUE)	7	STAINLESS STEEL	
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED			
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL		DRAWN <i>D. Matsume</i> '05.11.07	DESIGNED <i>D. Matsume</i> '05.11.07	CHECKED <i>E. Kunita</i> '05.11.09	APPROVED <i>M. Sato</i> '05.11.09	RELEASED
DRAWING NO. EDC4-007761-73		PART NO. HR10-10P-12S(73)				
SACLE 2 : 1		CODE NO. CL110-0026-0-73				1 1
UNITS mm		HRS HIROSE ELECTRIC CO., LTD.				

TO
R