


Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case that the application demands a high level of reliability, such as automotive,
 please contact a company representative for further information.

1			2			3			4					
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△									
△					△									
△					△									

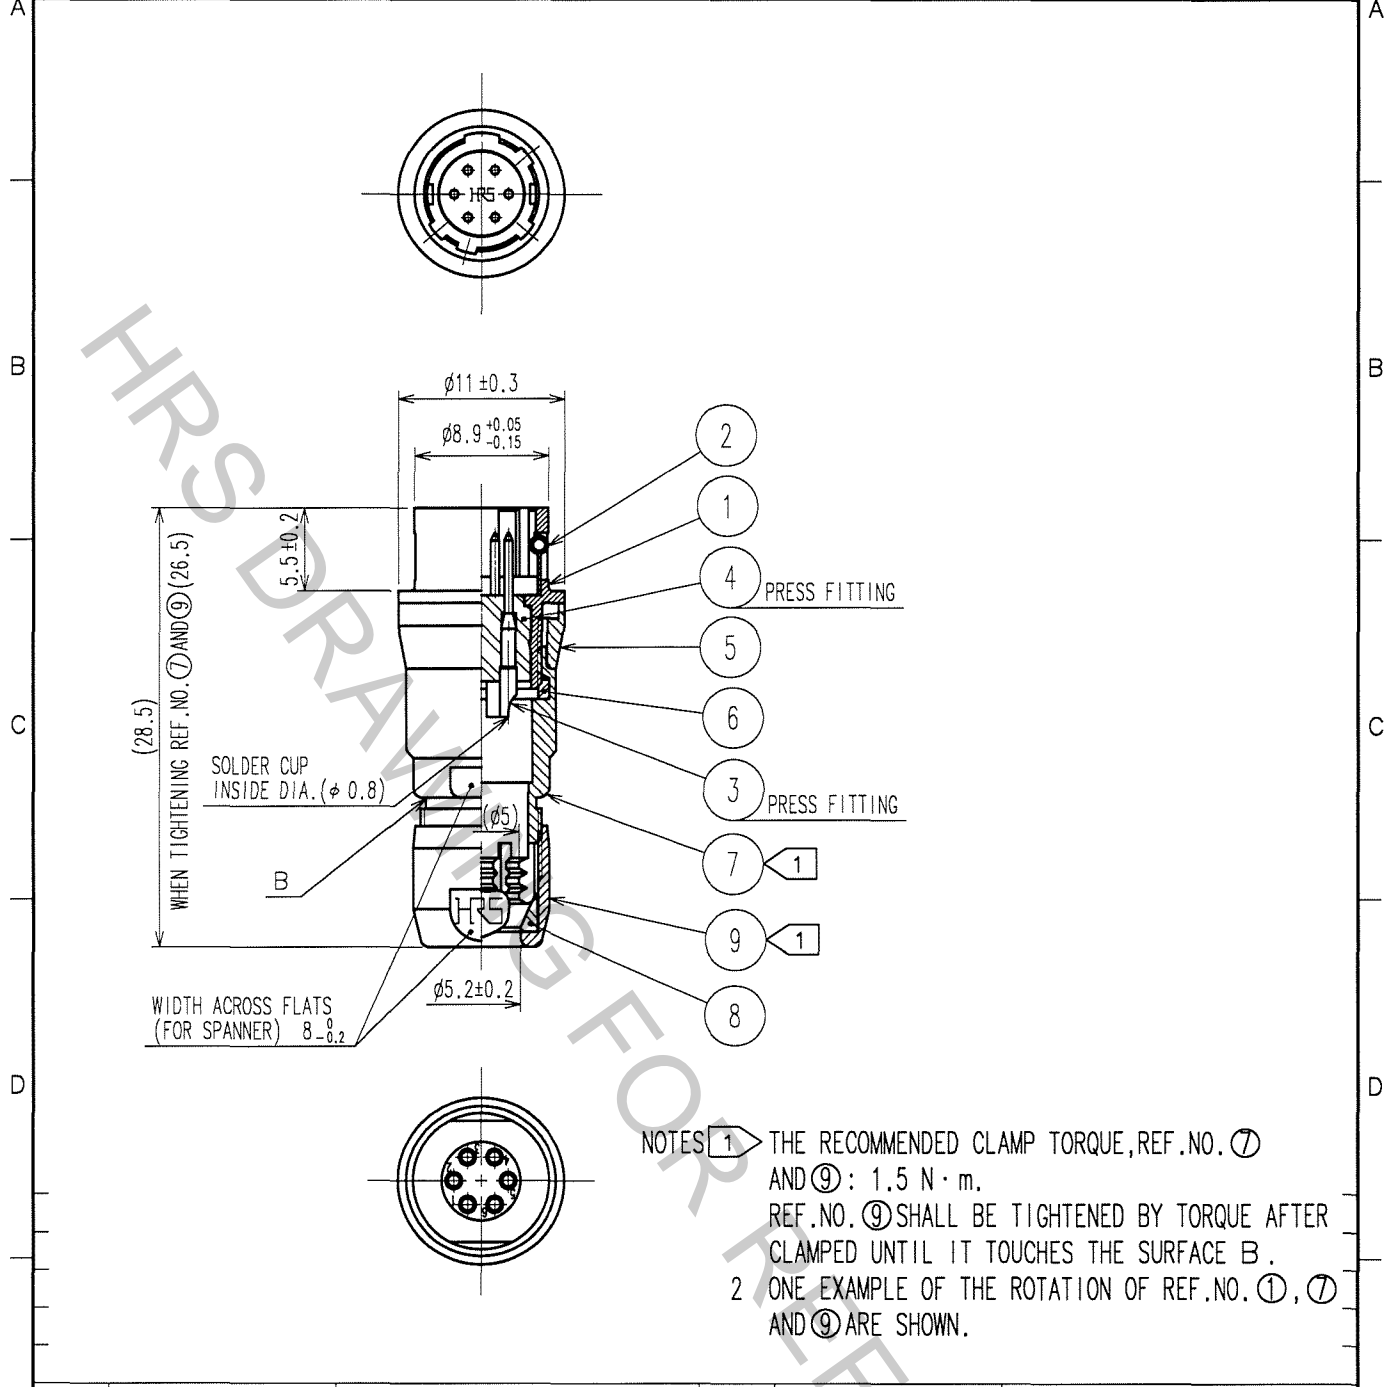

NOTES 1 THE RECOMMENDED CLAMP TORQUE, REF. NO. ⑦ AND ⑨: 1.5 N · m.
 REF. NO. ⑨ SHALL BE TIGHTENED BY TORQUE AFTER CLAMPED UNTIL IT TOUCHES THE SURFACE B.
 2 ONE EXAMPLE OF THE ROTATION OF REF. NO. ①, ⑦ AND ⑨ ARE SHOWN.

4	POLYAMIDE	(BLUE)	9	BRASS	MATTE FINISH NICKEL PLATED
3	BRASS	GOLD PLATING 0.2 μm min. NICKEL UNDER PLATING 2 μm min.	8	POLYAMIDE	
2	STAINLESS STEEL		7	BRASS	MATTE FINISH NICKEL PLATED
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	6	POLYAMIDE	
			5	BRASS	MATTE FINISH NICKEL PLATED
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL		DRAWN <i>D. Matsume</i> 05.11.19	DESIGNED <i>D. Matsume</i> 05.11.19	CHECKED <i>E. Kunita</i> 05.11.22	APPROVED <i>M. Sato</i> 05.11.24	RELEASED
DRAWING NO. EDC4-007765-73		PART NO. HR10-7J-6P(73)				
SCALE 2 : 1		CODE NO. CL110-0030-7-73				1 1
UNITS mm		HRS HIROSE ELECTRIC CO., LTD.				

TO
R