



Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.

TO
R

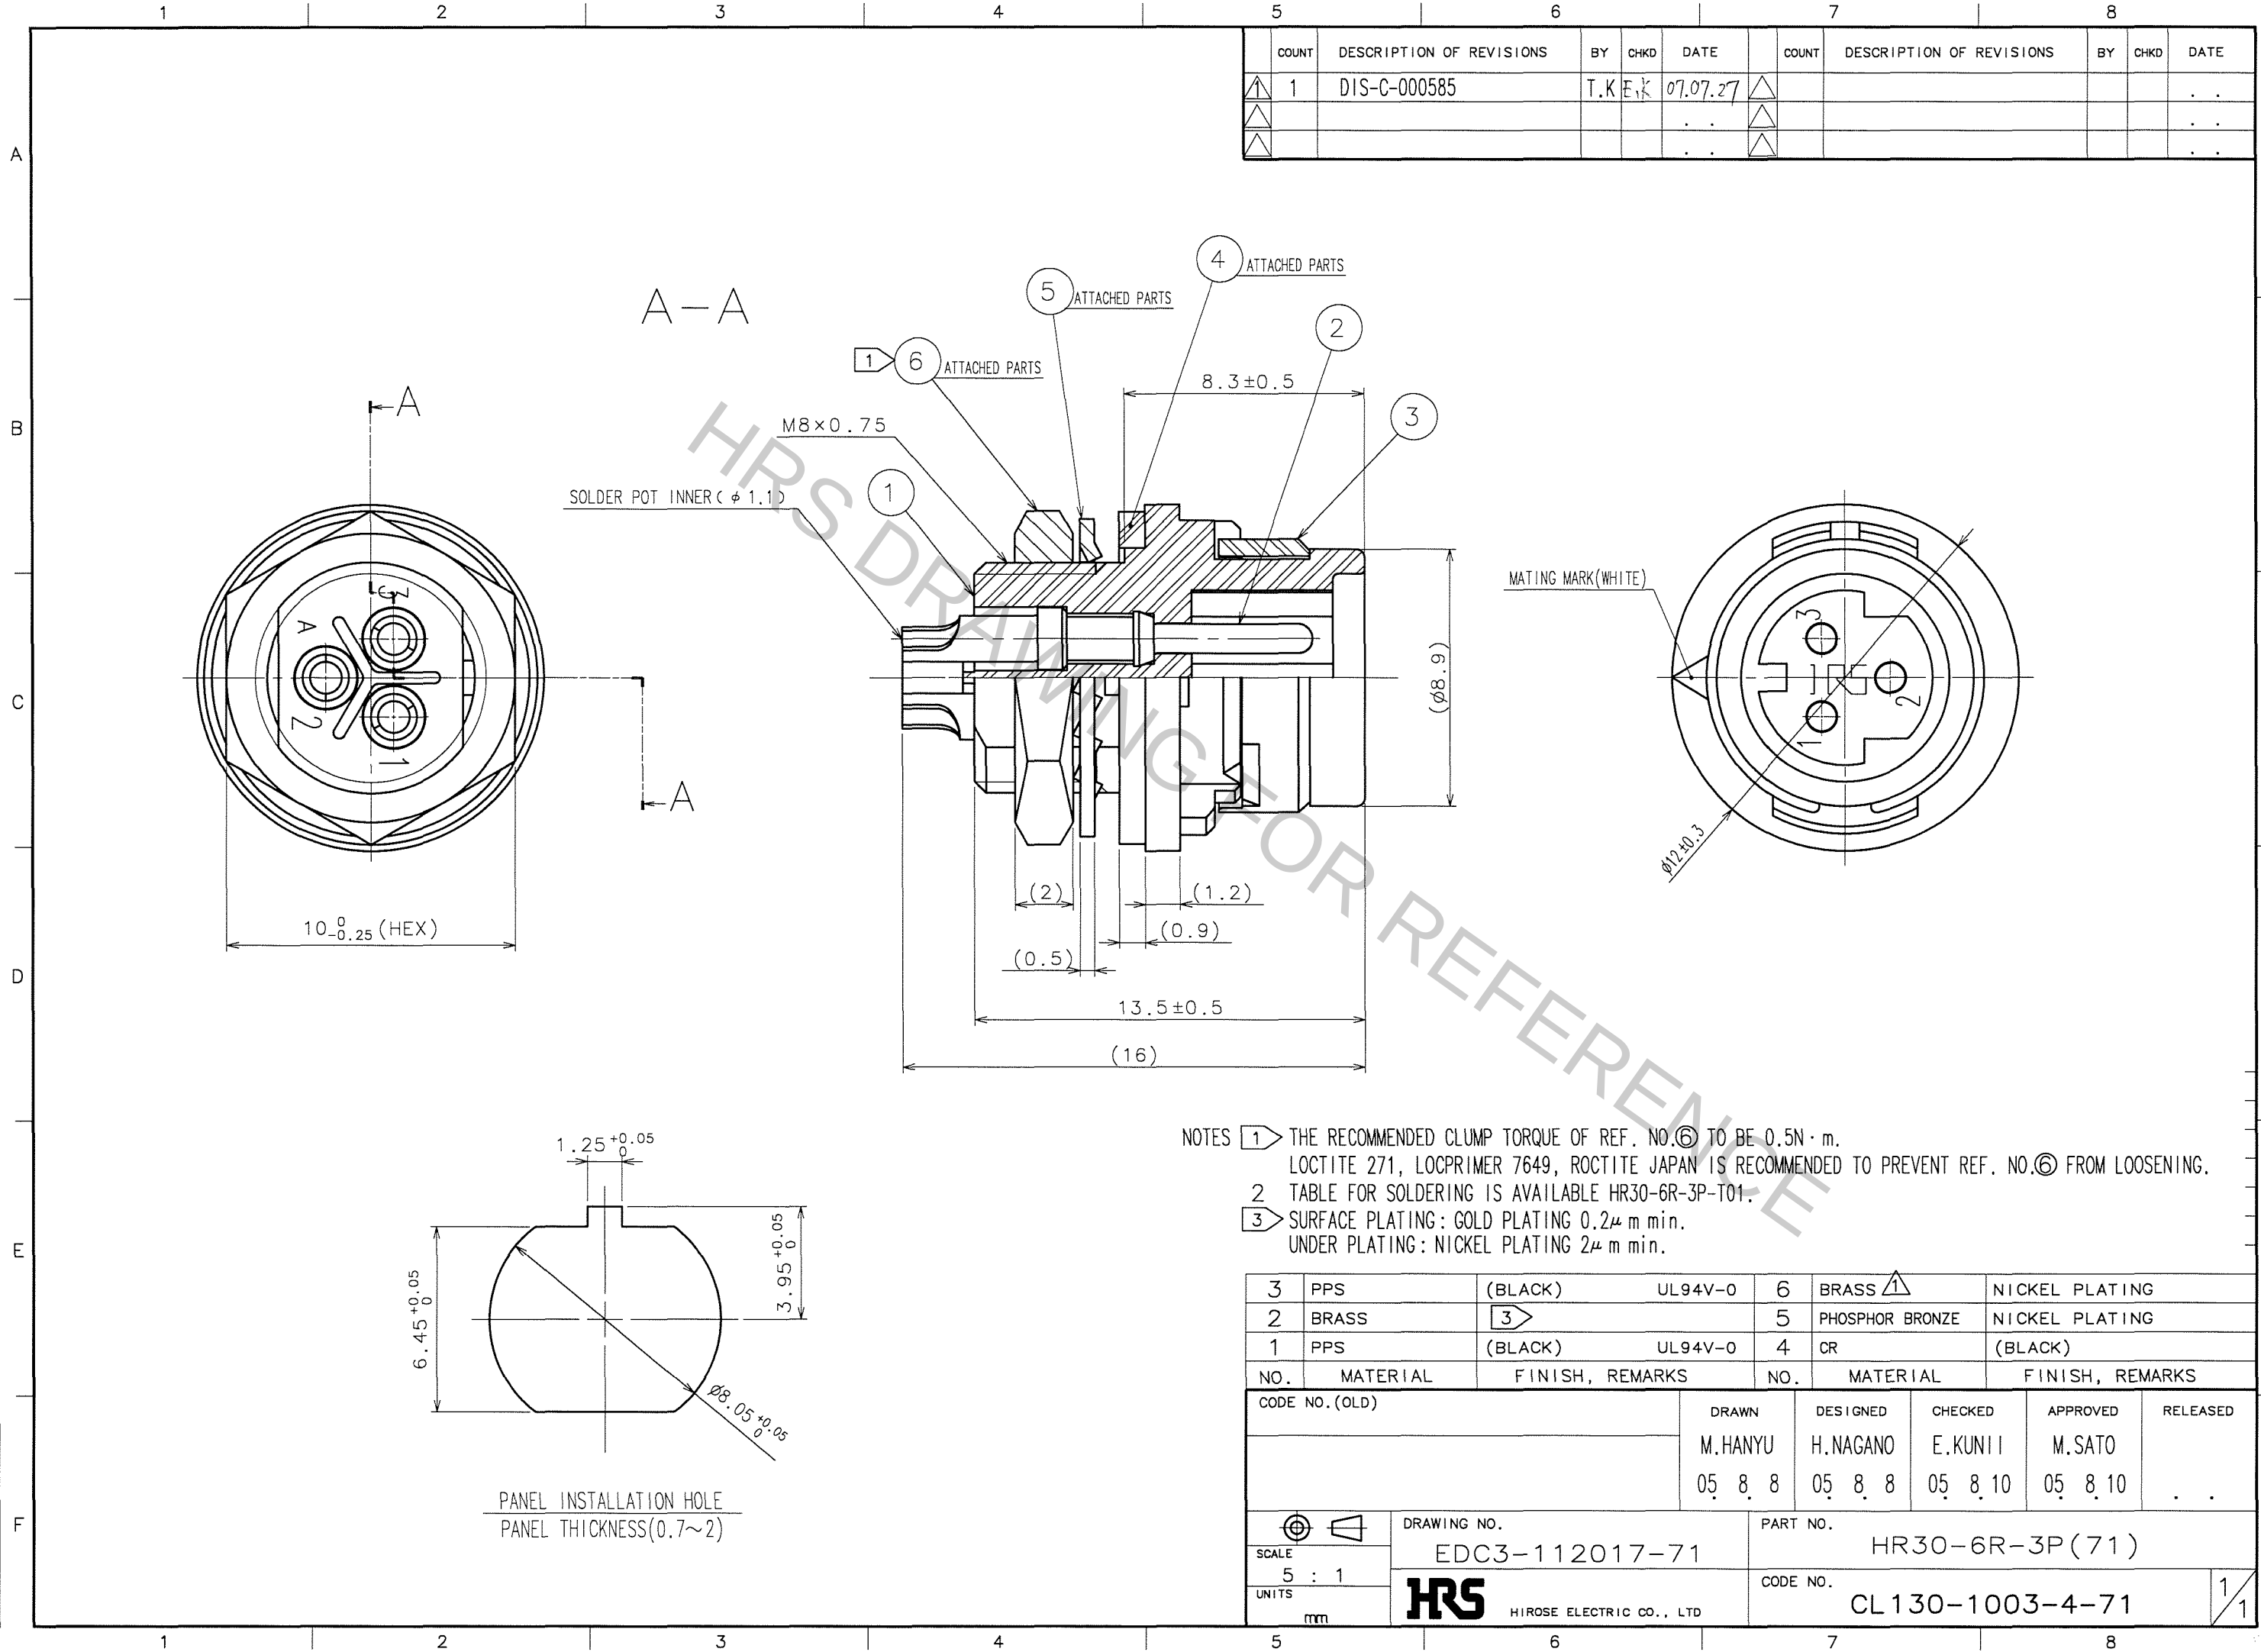

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	DIS-C-000585	T.K	E.K	07.07.27					

- NOTES 1 THE RECOMMENDED CLUMP TORQUE OF REF. NO.⑥ TO BE 0.5N·m.
LOCTITE 271, LOCPRIMER 7649, ROCTITE JAPAN IS RECOMMENDED TO PREVENT REF. NO.⑥ FROM LOOSENING.
2 TABLE FOR SOLDERING IS AVAILABLE HR30-6R-3P-T01.
3 SURFACE PLATING: GOLD PLATING 0.2μm min.
UNDER PLATING: NICKEL PLATING 2μm min.

3	PPS	(BLACK)	UL94V-0	6	BRASS 	NICKEL PLATING	
2	BRASS			5	PHOSPHOR BRONZE	NICKEL PLATING	
1	PPS	(BLACK)	UL94V-0	4	CR	(BLACK)	
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS	
CODE NO. (OLD)			DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
			M.HANYU	H.NAGANO	E.KUNII	M.SATO	
			05. 8. 8	05. 8. 8	05. 8. 10	05. 8. 10	. .
		DRAWING NO.		PART NO.			
SCALE		EDC3-112017-71		HR30-6R-3P(71)			
5 : 1		 HIROSE ELECTRIC CO., LTD		CODE NO.		1/1	
UNITS				CL130-1003-4-71			
mm							