


	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
▲	1	DIS-C-000585	T.K	E.k	07.07.27	▲					. .
▲					. .	▲					. .
▲					. .	▲					. .

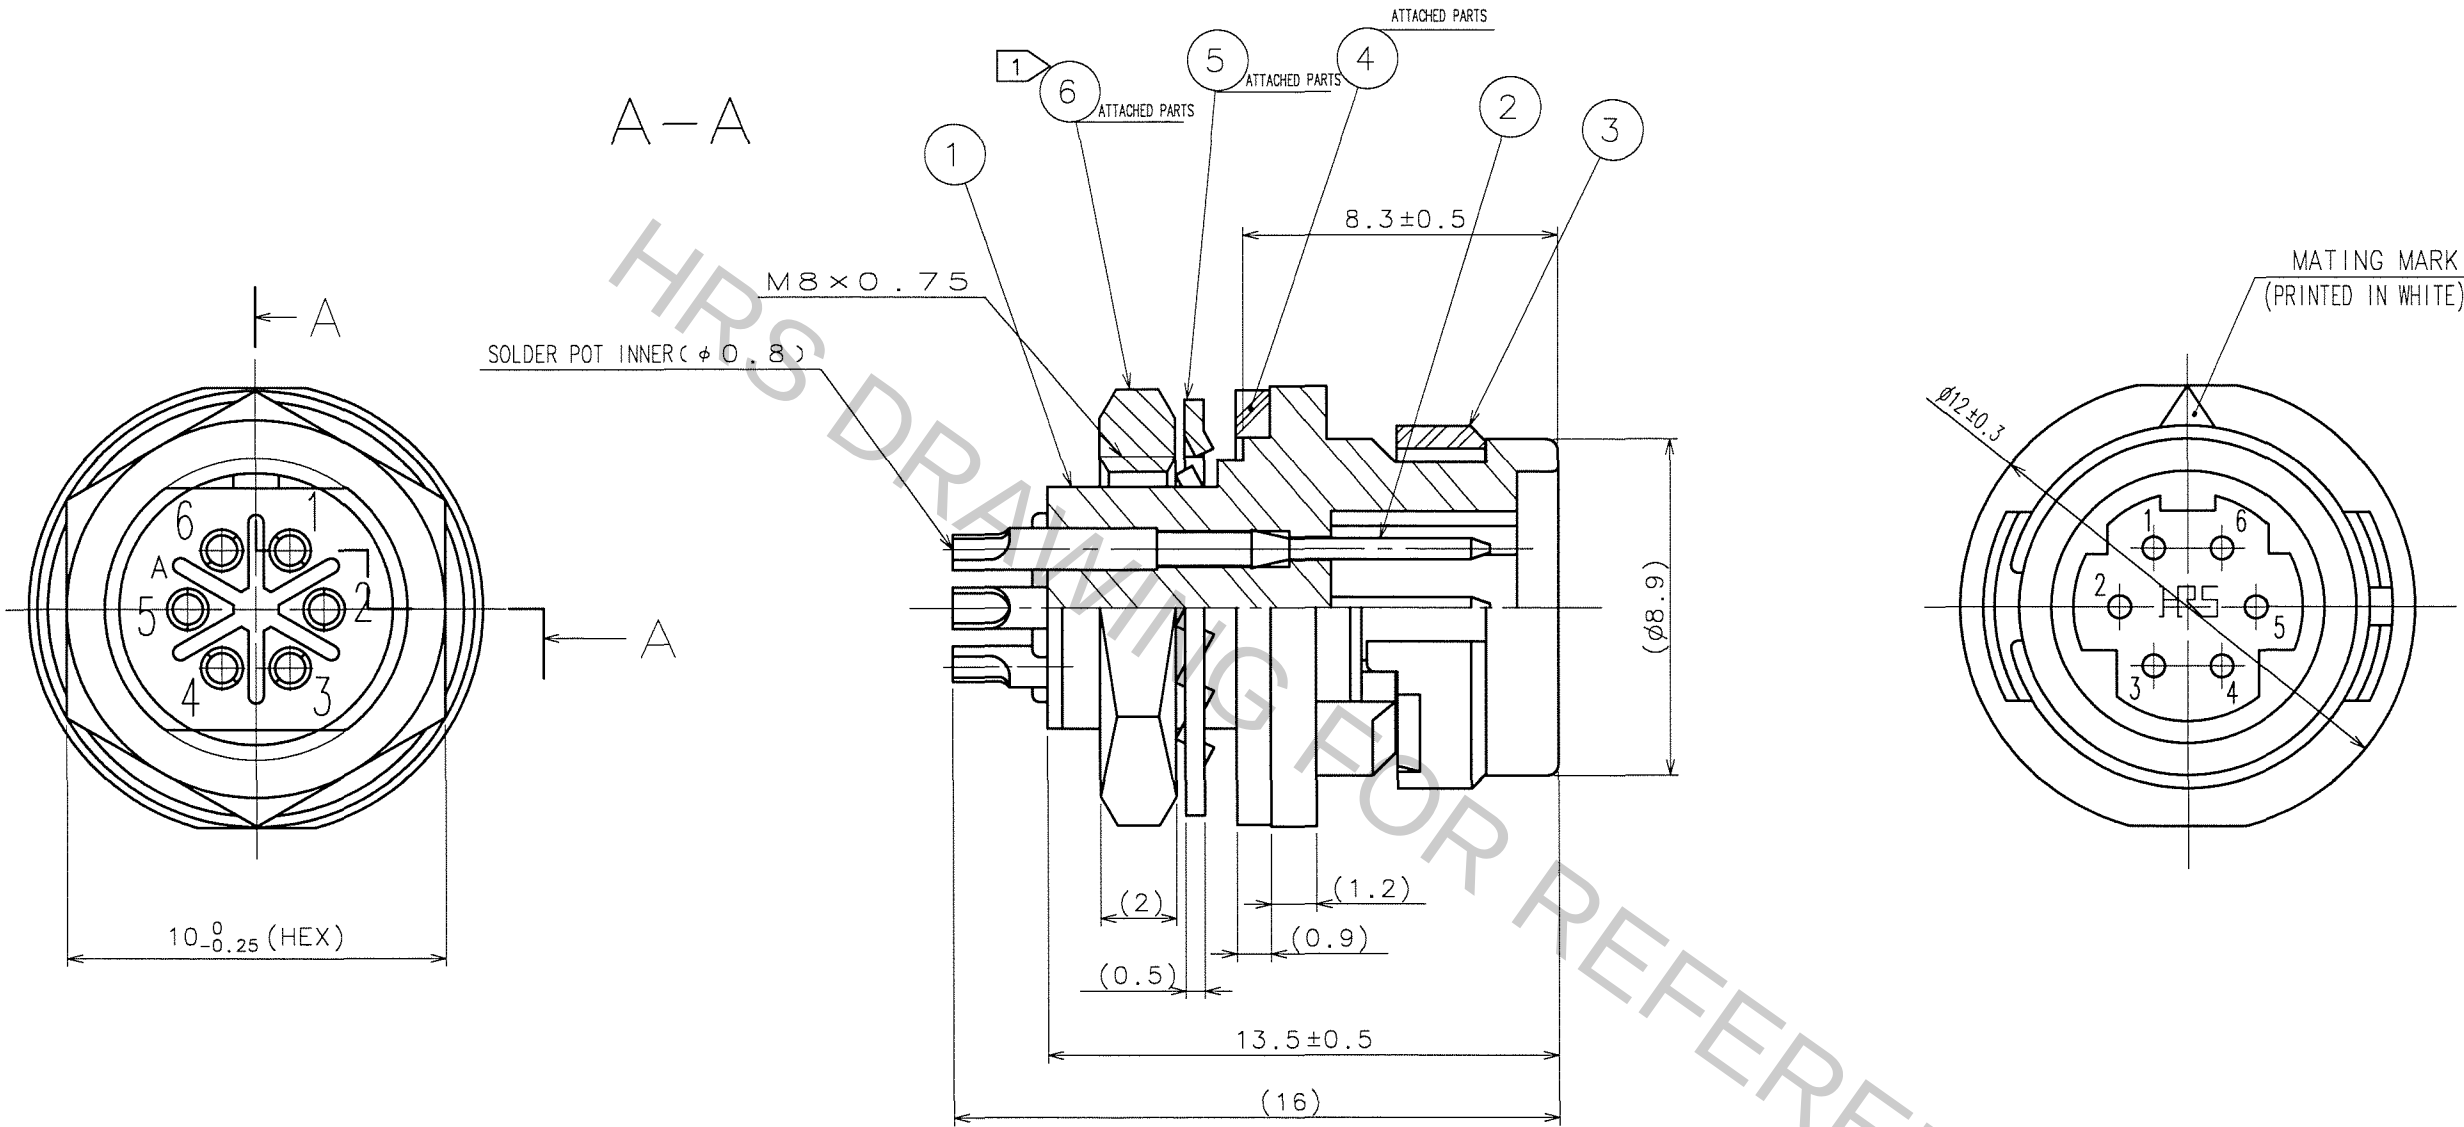

- NOTES
- 1 THE RECOMMENDED CLUMP TORQUE OF REF. NO. ⑥ TO BE $0.5\text{ N} \cdot \text{m}$.
LOCTITE 271, LOCPRIMER 7649, LOCTITE JAPAN IS RECOMMENDED TO PREVENT REF. NO. ⑥ FROM LOOSENING.
 - 2 TABLE FOR SOLDERING IS AVAILABLE HR30-6R-6P-T01.
 - 3 SURFACE PLATING: GOLD PLATING $0.2\mu\text{m min.}$
UNDER PLATING: NICKEL PLATING $2\mu\text{m min.}$

3	PPS	(BLACK)	6	BRASS 	NICKEL PLATING
2	BRASS		5	PHOSPHOR BRONZE	NICKEL PLATING
1	PPS	(BLACK) UL94V-0	4	CR	(BLACK)
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
	M. HANYU	H. NAGANO	E. KUNII	M. SATO	
	'05 8 8	'05 8 8	'05 8 10	'05 8 10	. .

 SCALE 5 : 1 UNITS mm	DRAWING NO.		PART NO.	
	EDC3-112023-71		HR30-6R-6P(71)	
	 HIROSE ELECTRIC CO., LTD		CODE NO. CL130-1009-0-71	
			1/1	

TO
R

PANEL THICKNESS (0.7 ~ 2)