
Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive, please contact a company representative for further information.

ASSEMBLY PROCEDURE : ETAD-J0070

ASSEMBLY TOOL : FOR THE OUTER CONTACT HT303/P0-P-2-T (1)
FOR THE COVER UM-T-1

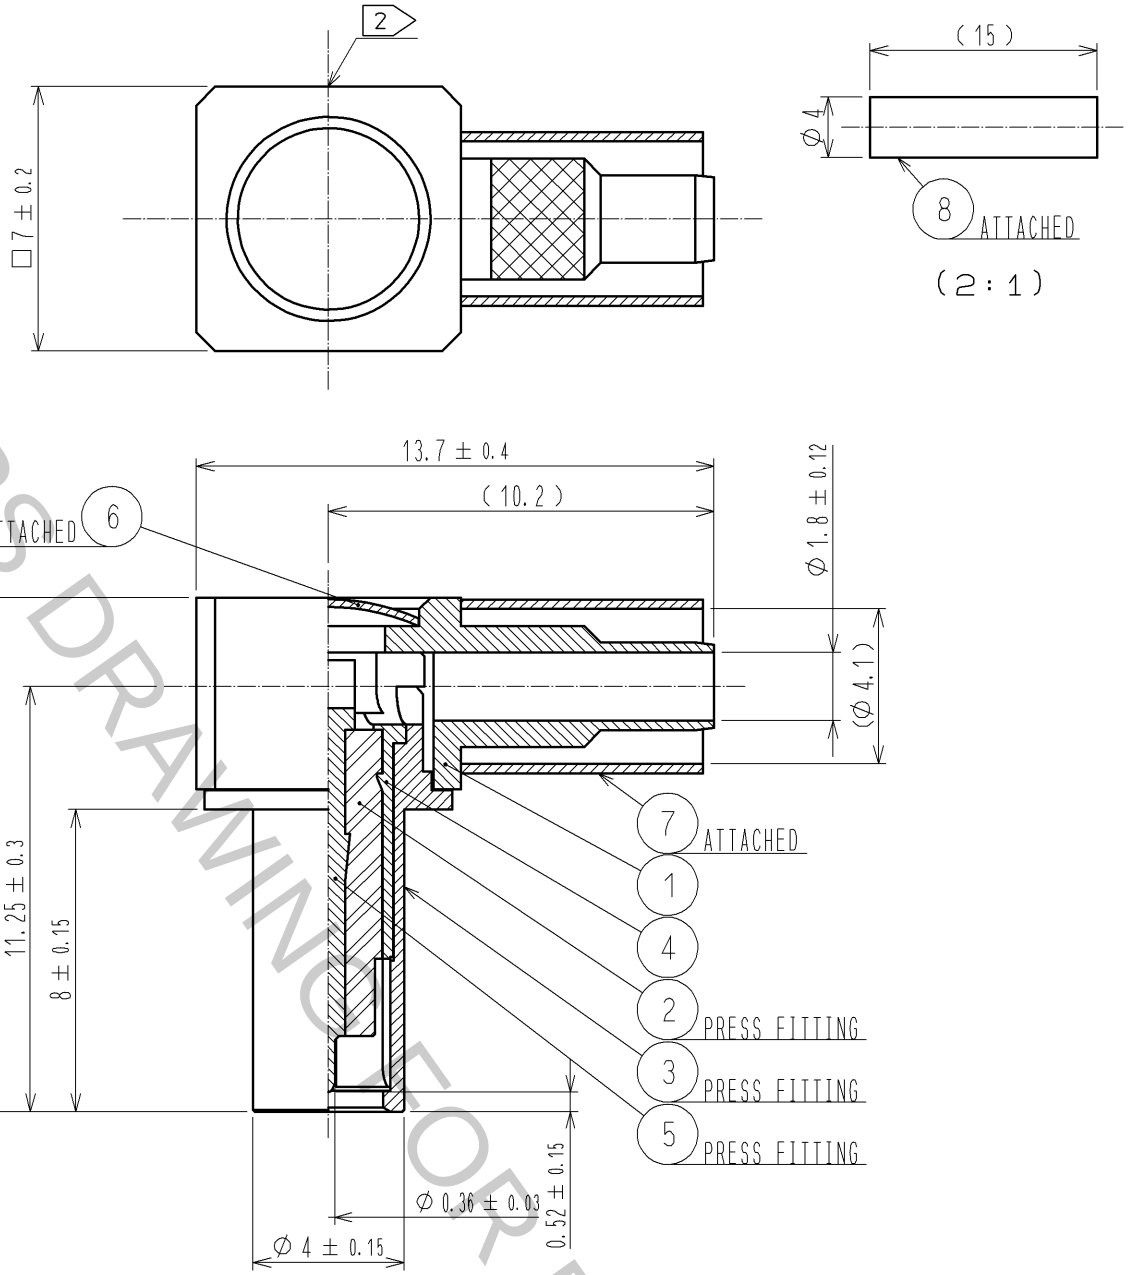

NOTE 1. FOR THE USE OF THIS PRODUCT, PUSH IT ON MS-162
2 MARKING HRS

HRS DRAWING FOR REFERENCE

NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
4	PHOSHOR BRONZE	NICKEL	8	POLYOLEFIN	HEAT SHRINK TUBING
3	PHOSHOR BRONZE	NICKEL	7	COPPER	NICKEL
2	PTFE		6	BRASS	NICKEL
1	BRASS	NICKEL	5	PHOSHOR BRONZE	GOLD

UNITS	SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5 : 1	(1)	1	DIS-J-001288	RI. SATO	TY. OZAKI	11. 02. 07

HIROSE ELECTRIC CO., LTD.

APPROVED	KJ. KAWAMURA	05. 08. 25
CHECKED	TY. OZAKI	05. 08. 25
DESIGNED	YH. MATSUO	05. 08. 24
DRAWN	YH. MATSUO	05. 08. 24

DRAWING NO.	EDC4-180547-00
PART NO.	MS-162-C(LP)-1
CODE NO.	CL358-0222-4-00 (1) 1/1

FORM HC0011-5-51