
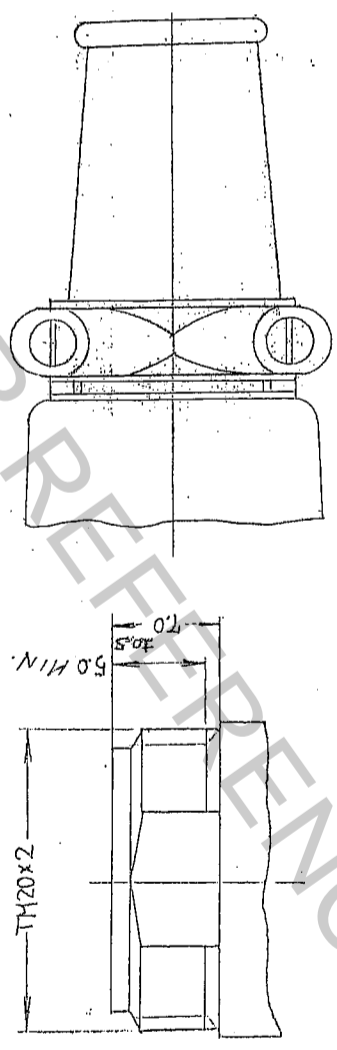
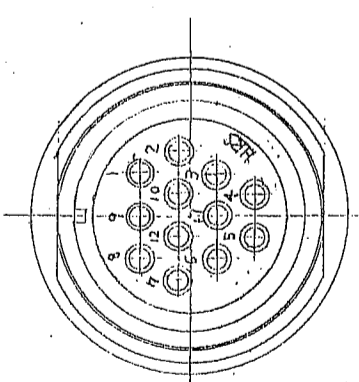


3 In case that the application demands a high level of reliability, such as automotive, please contact a company representative for further information.

| COUNT | DESCRIPTION OF REVISIONS | BY | CHKD | DATE | COUNT | DESCRIPTION OF REVISIONS | BY | CHKD | DATE |
|-------|--------------------------|----|------|------|-------|--------------------------|----|------|------|
|       |                          |    |      |      |       |                          |    |      |      |
|       |                          |    |      |      |       |                          |    |      |      |
|       |                          |    |      |      |       |                          |    |      |      |

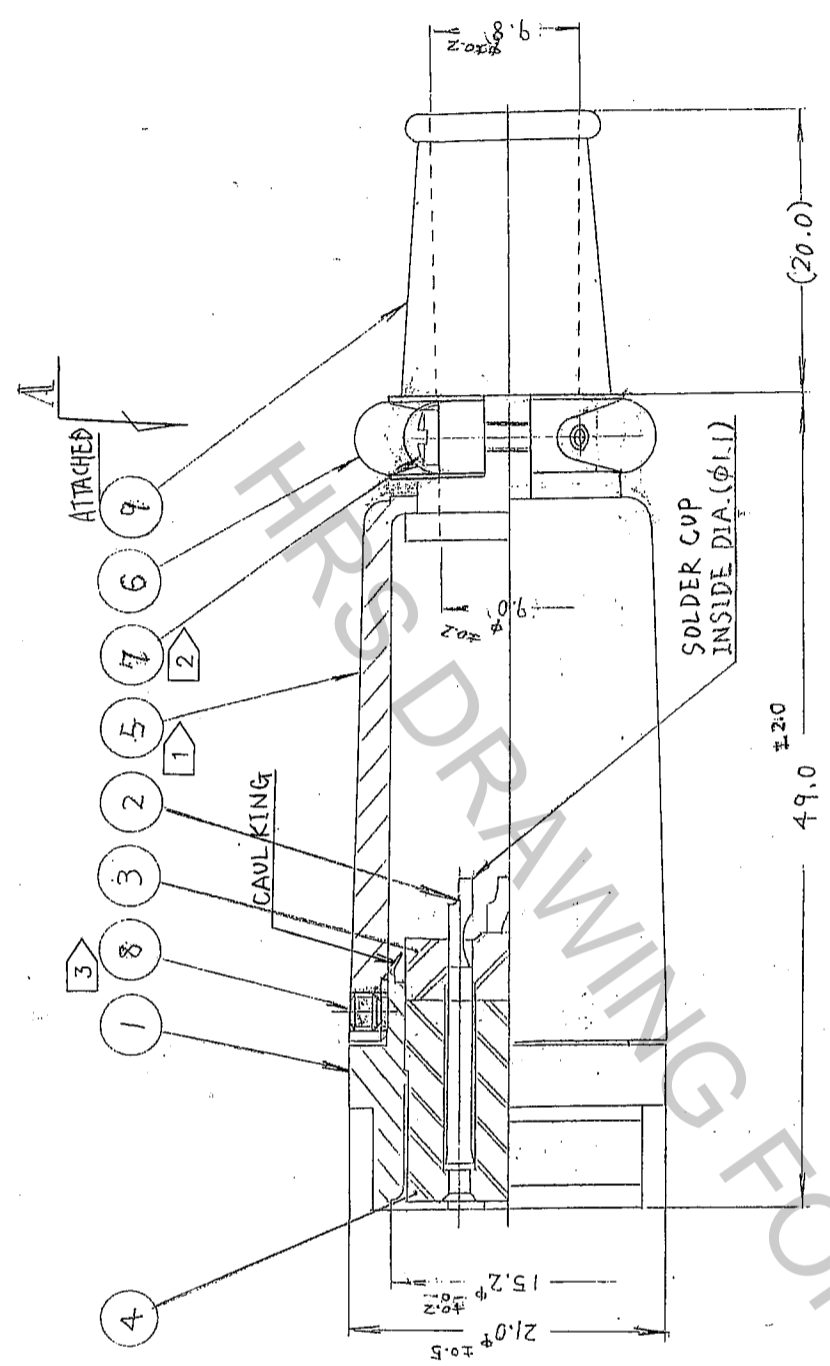

| NO. | MATERIAL                 | FINISH, REMARKS           | NO. | MATERIAL       | FINISH, REMARKS               |
|-----|--------------------------|---------------------------|-----|----------------|-------------------------------|
| 4   | DIALYL PHTHALATE (BLACK) | UL94V-0                   | 9   | CR             |                               |
| 3   | DIALYL PHTHALATE (BLACK) | UL94V-0                   | 8   | STEEL          | NICKEL PLATING                |
| 2   | COPPER ALLOY             | SILVER PLATING 5μm min.   | 7   | BRASS          | NICKEL PLATING M2×0.4×8       |
| 1   | ZINC ALLOY               | MATTE FINISH CHROME PLATE | 6   | ALUMINUM ALLOY | MATTE FINISH ALUMITE (CHROME) |
|     |                          |                           | 5   | ALUMINUM ALLOY | MATTE FINISH ALUMITE (CHROME) |

| CODE NO. (OLD) | CL | DRAWN       | DESIGNED  | CHECKED  | APPROVED | RELEASED |
|----------------|----|-------------|-----------|----------|----------|----------|
|                |    | M. Ishihara | E. Yumino | H. Zemba | M. Sato  |          |
|                |    | 05.09.26    | 05.09.26  | 05.09.27 | 05.09.27 |          |

|             |                |          |                 |
|-------------|----------------|----------|-----------------|
| DRAWING NO. | EDC3-007497-71 | PART NO. | RM15TJD-12S(71) |
| SCALE       | 2 : 1          | CODE NO. | CL109-0665-9-71 |
| UNITS       | mm             |          |                 |

- NOTES
- ① THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑤ TO BE 2 TO 3 N · m.
  - ② THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑦ TO BE 0.12 TO 0.15 N · m.
  - ③ THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑧ TO BE 0.3 TO 0.4 N · m.
  - ④ RECOMMENDED ADHESIVE TO PREVENT LOOSENESS OF THE SCREW FOR REF. NO. ⑧ : PRODUCT NO. LOCTITE 242.
  - ⑤ ROTATION EXAMPLES OF REF. NO. ① AND ⑤ ARE SHOWN.

|    |  |
|----|--|
| TO |  |
| R  |  |