


Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.

FOR FURTHER INFORMATION		DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
✓		.	✓				.
✓		.	✓				.
✓		.	✓				.

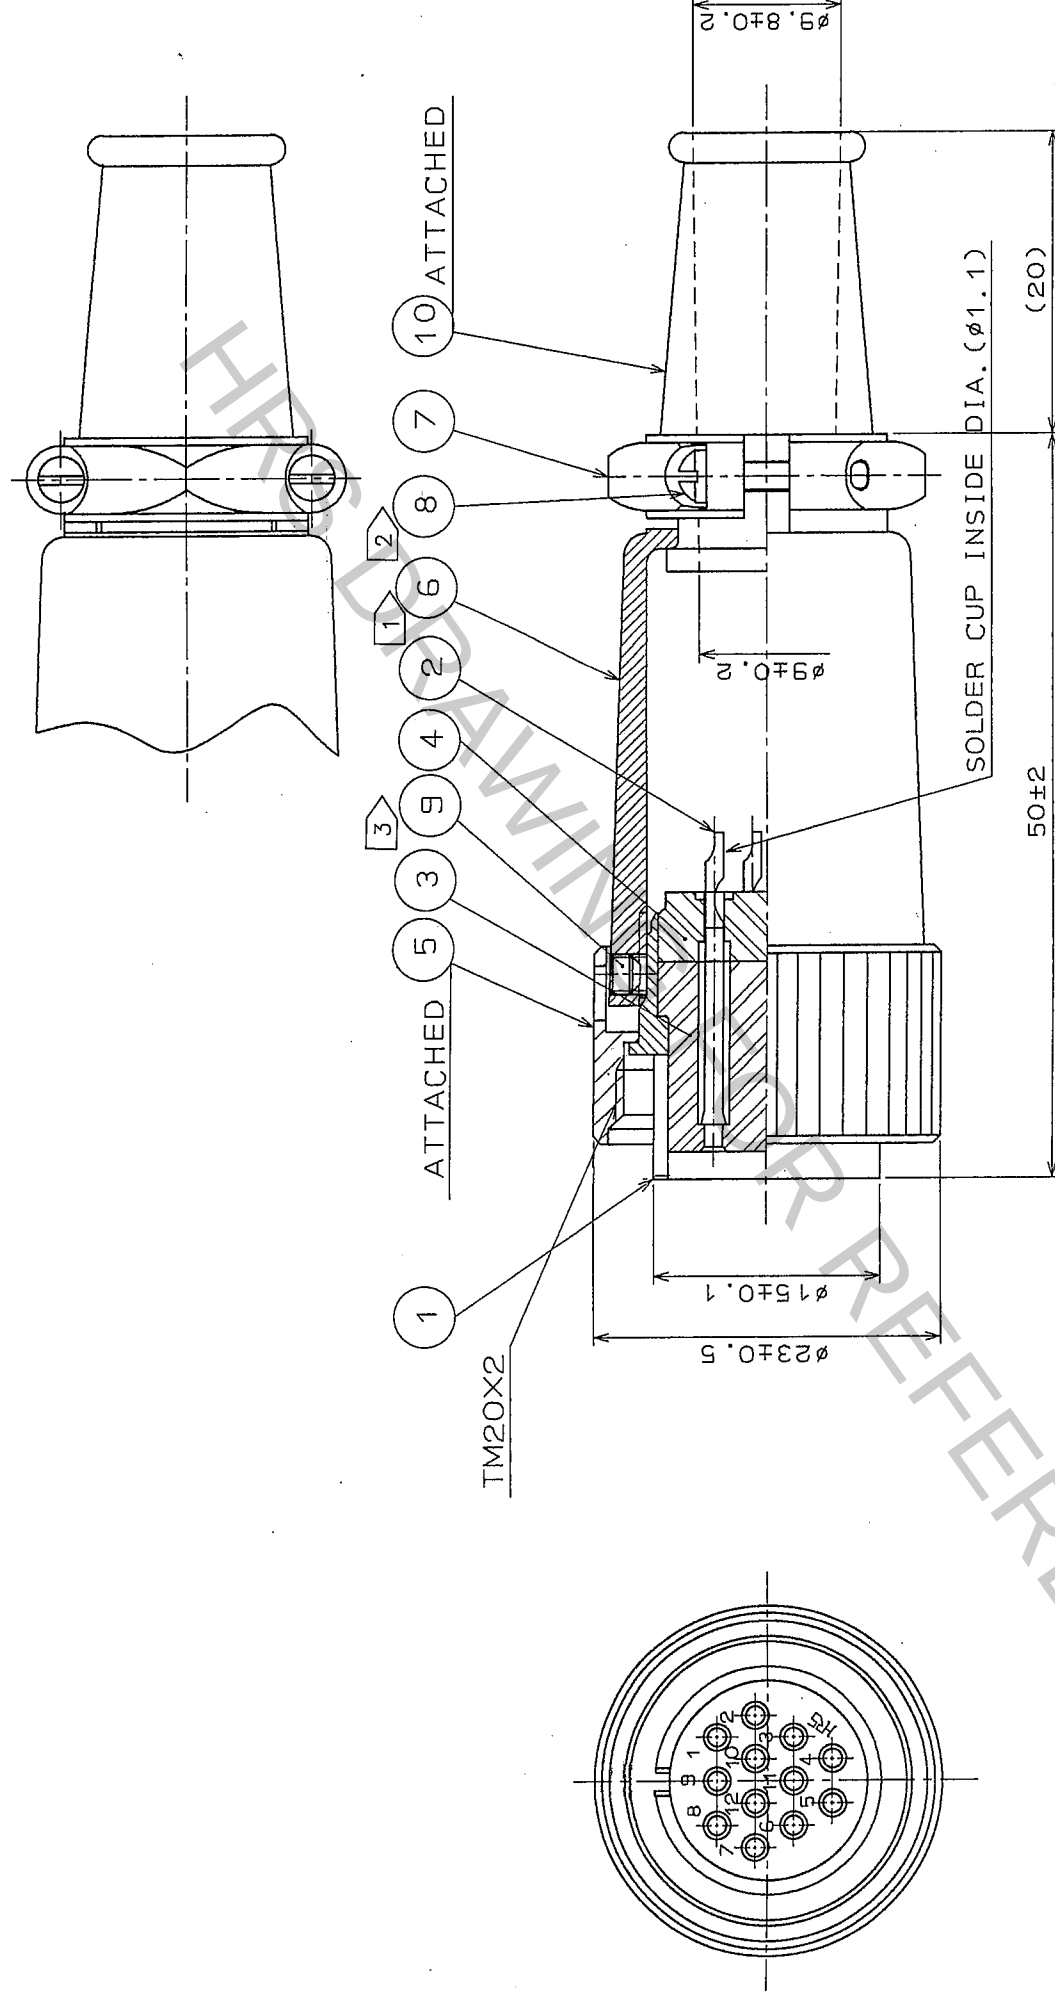

- | | | |
|-------|---|--|
| NOTES | ① | THE RECOMMENDED CLAMP TORQUE OF REF.NO. ⑥ TO BE 2 TO 3 N · m. |
| | ② | THE RECOMMENDED CLAMP TORQUE OF REF.NO. ⑧ TO BE 0.12 TO 0.15 N · m. |
| | ③ | THE RECOMMENDED CLAMP TORQUE OF REF.NO. ⑨ TO BE 0.3 TO 0.4 N · m. |
| | | RECOMMENDED ADHESIVE TO PREVENT LOOSENESS OF THE SCREW FOR REF.NO. ⑨
: PRODUCT NO. LOCTITE 242. |
| 4 | | ROTATION EXAMPLES OF REF.NO. ① AND ⑥ ARE SHOWN. |

5	BRASS	NICKEL PLATING	10	C.R	(BLACK)
4	DIALYL PHTHALATE	(BLACK) UL94V-0	9	STEEL	NICKEL PLATING
3	DIALYL PHTHALATE	(BLACK) UL94V-0	8	BRASS	NICKEL PLATING M2X0.4X8
2	COPPER ALLOY	SILVER PLATING 5 μ m in.	7	ALUMINUM ALLOY	MATTE FINISH ALUMITE (CHROME)
1	ZINC ALLOY	MATTE FINISH CHROME PLATE	6	ALUMINUM ALLOY	MATTE FINISH ALUMITE (CHROME)
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED
		M. Hengyuan		H. Zamba	M. Sato
		65.9.21		65.9.21	65.9.26
DRAWING NO.		PART NO.			
EDC3-007493-71		RM15TPD-12S (71)			
SCALE		CODE NO.			
2 : 1		CL109-0661-8-71			
UNITS		mm			
mm		mm			