


Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case that the application demands a high level of reliability, such as automotive,
 please contact a company representative for further information.

1		2			3			4		
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	
△					△					
△					△					
△					△					

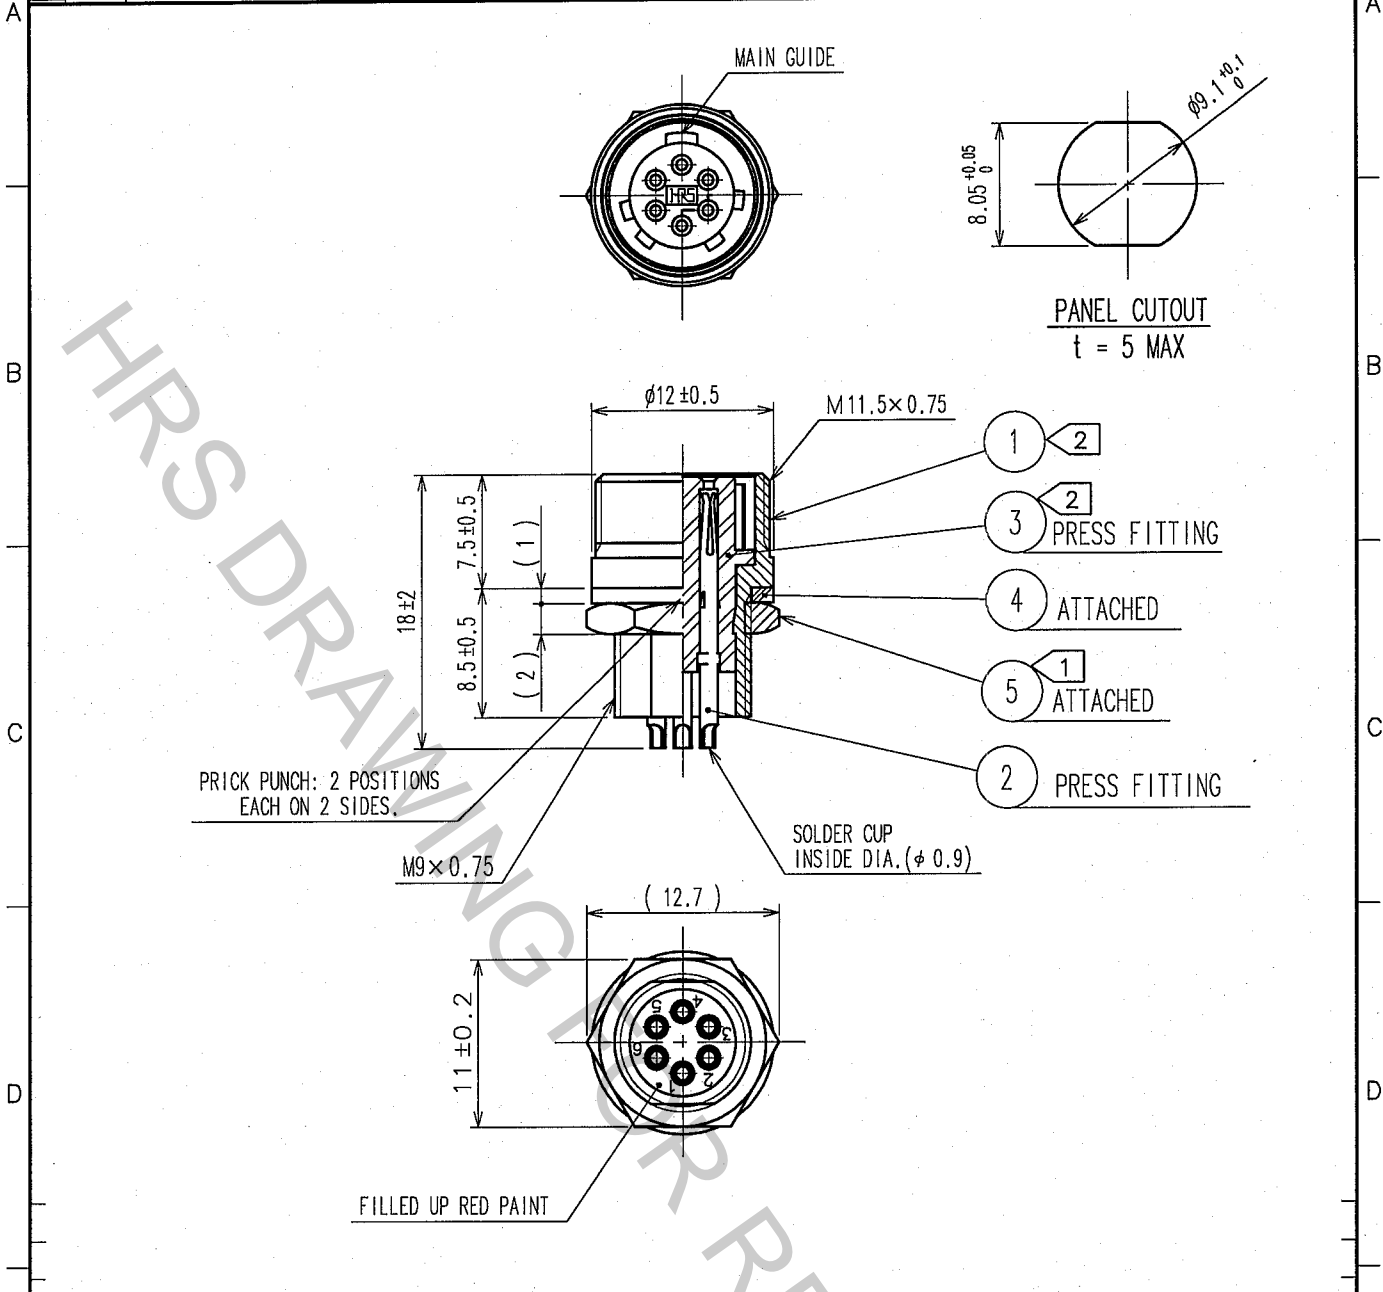

NOTE ① THE RECOMMENDED CLAMP TORQUE OF COMPONENT ⑤ : 1.5 TO 2 N · m
 LOCTITE 242, LOCTITE OR EQUIVALENT IS RECOMMENDED TO
 PREVENT COMPONENT ⑤ FROM LOOSENING.
 ② TORQUE FOR THE FIXTURE OF COMPONENT ① AND ③ IS TO BE 0.7 N · m MIN.

3	POLYACETAL	(WHITE)			
2	COPPER ALLOY	SURFACE PLATING : GOLD PLATING 0.2μ m min. UNDER PLATING : NICKEL PLATING 3μ m min.	5	STEEL	NICKEL PLATING
1	BRASS	CHROM PLATING	4	POLYAMIDE	(WHITE)
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL	E. Yamino 05.09.20	E. Yamino 05.09.20	H. Zemba 05.09.20	M. Sato 05.09.20	

SCALE 2 : 1	DRAWING NO.	PART NO.
	EDC4-005456-71	SR30-10R-6S(71)
UNITS mm	HRS HIROSE ELECTRIC CO., LTD.	CODE NO. CL103-0239-2-71

TO
R