

Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.


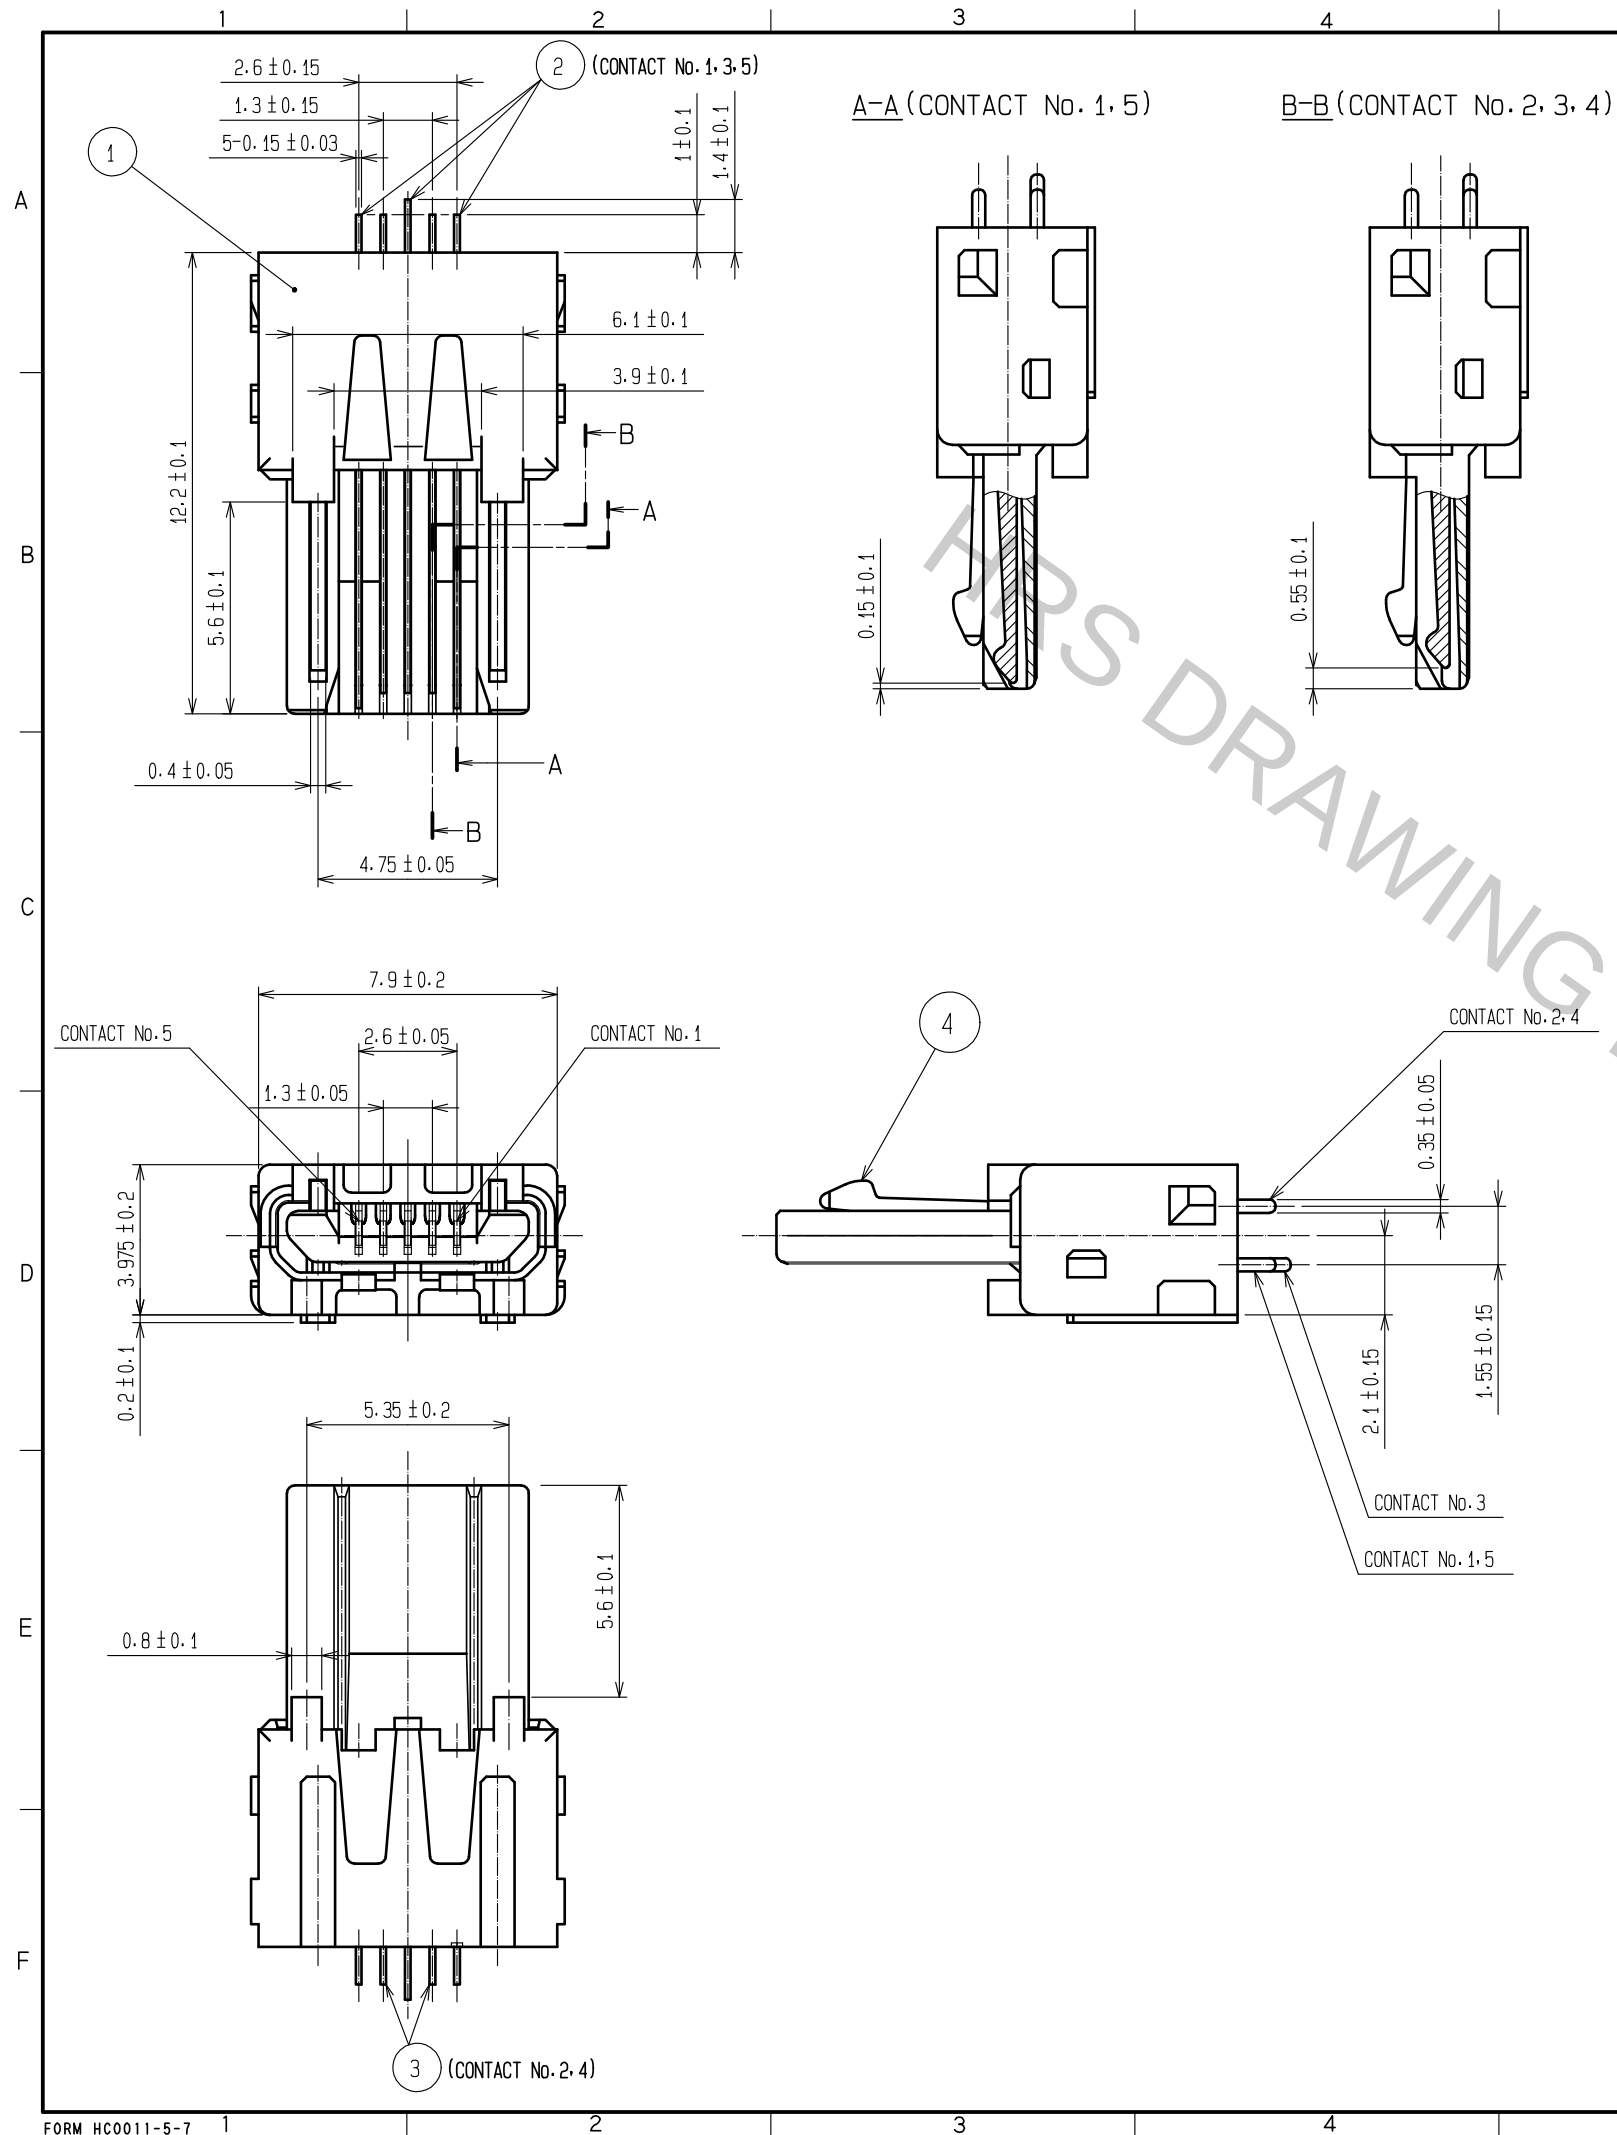




Fig - 1 PACKING SPECIFICATION -In the case of 4000 pcs-

1. STORED IN A TRAY (200pcs / tray)

3. STORED IN A CARTON BOX

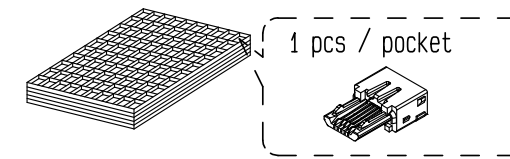

2. Banded FOR A PACK

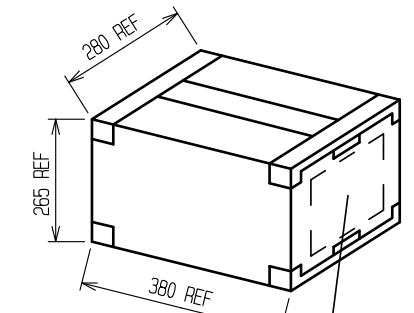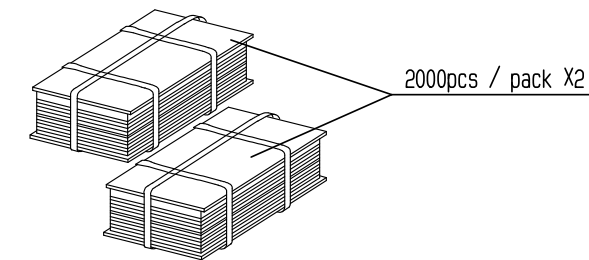

SHOWN AS FOLLOWS:

- Part No.
- Code No.
- QTY
- Lot No.

NOTES 1 PLATING
UNDER PLATING : NICKEL 2 μm MIN.
CONTACT AREA : GOLD 0.75 μm MIN.
LEAD AREA : TIN 1 μm MIN.

2	COPPER ALLOY	1	4	STAINLESS STEEL
1	LCP	UL94V-0, BLACK	3	COPPER ALLOY
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL
UNITS	mm	SCALE	COUNT	DESCRIPTION OF REVISIONS
5 : 1				
APPROVED	NM. NISHIMATSU	15.10.27	DRAWING NO.	EDC-126085-30-00
CHECKED	KN. ICHIKAWA	15.10.27	PART NO.	ZX20-B-5S-UNIT(30)
DESIGNED	TS. ITO	15.10.27	CODE NO.	CL242-0012-8-30
DRAWN	AK. AKIYAMA	15.10.27		

Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.

2 Fig-2 SHIELDING-PLATE ASSEMBLY



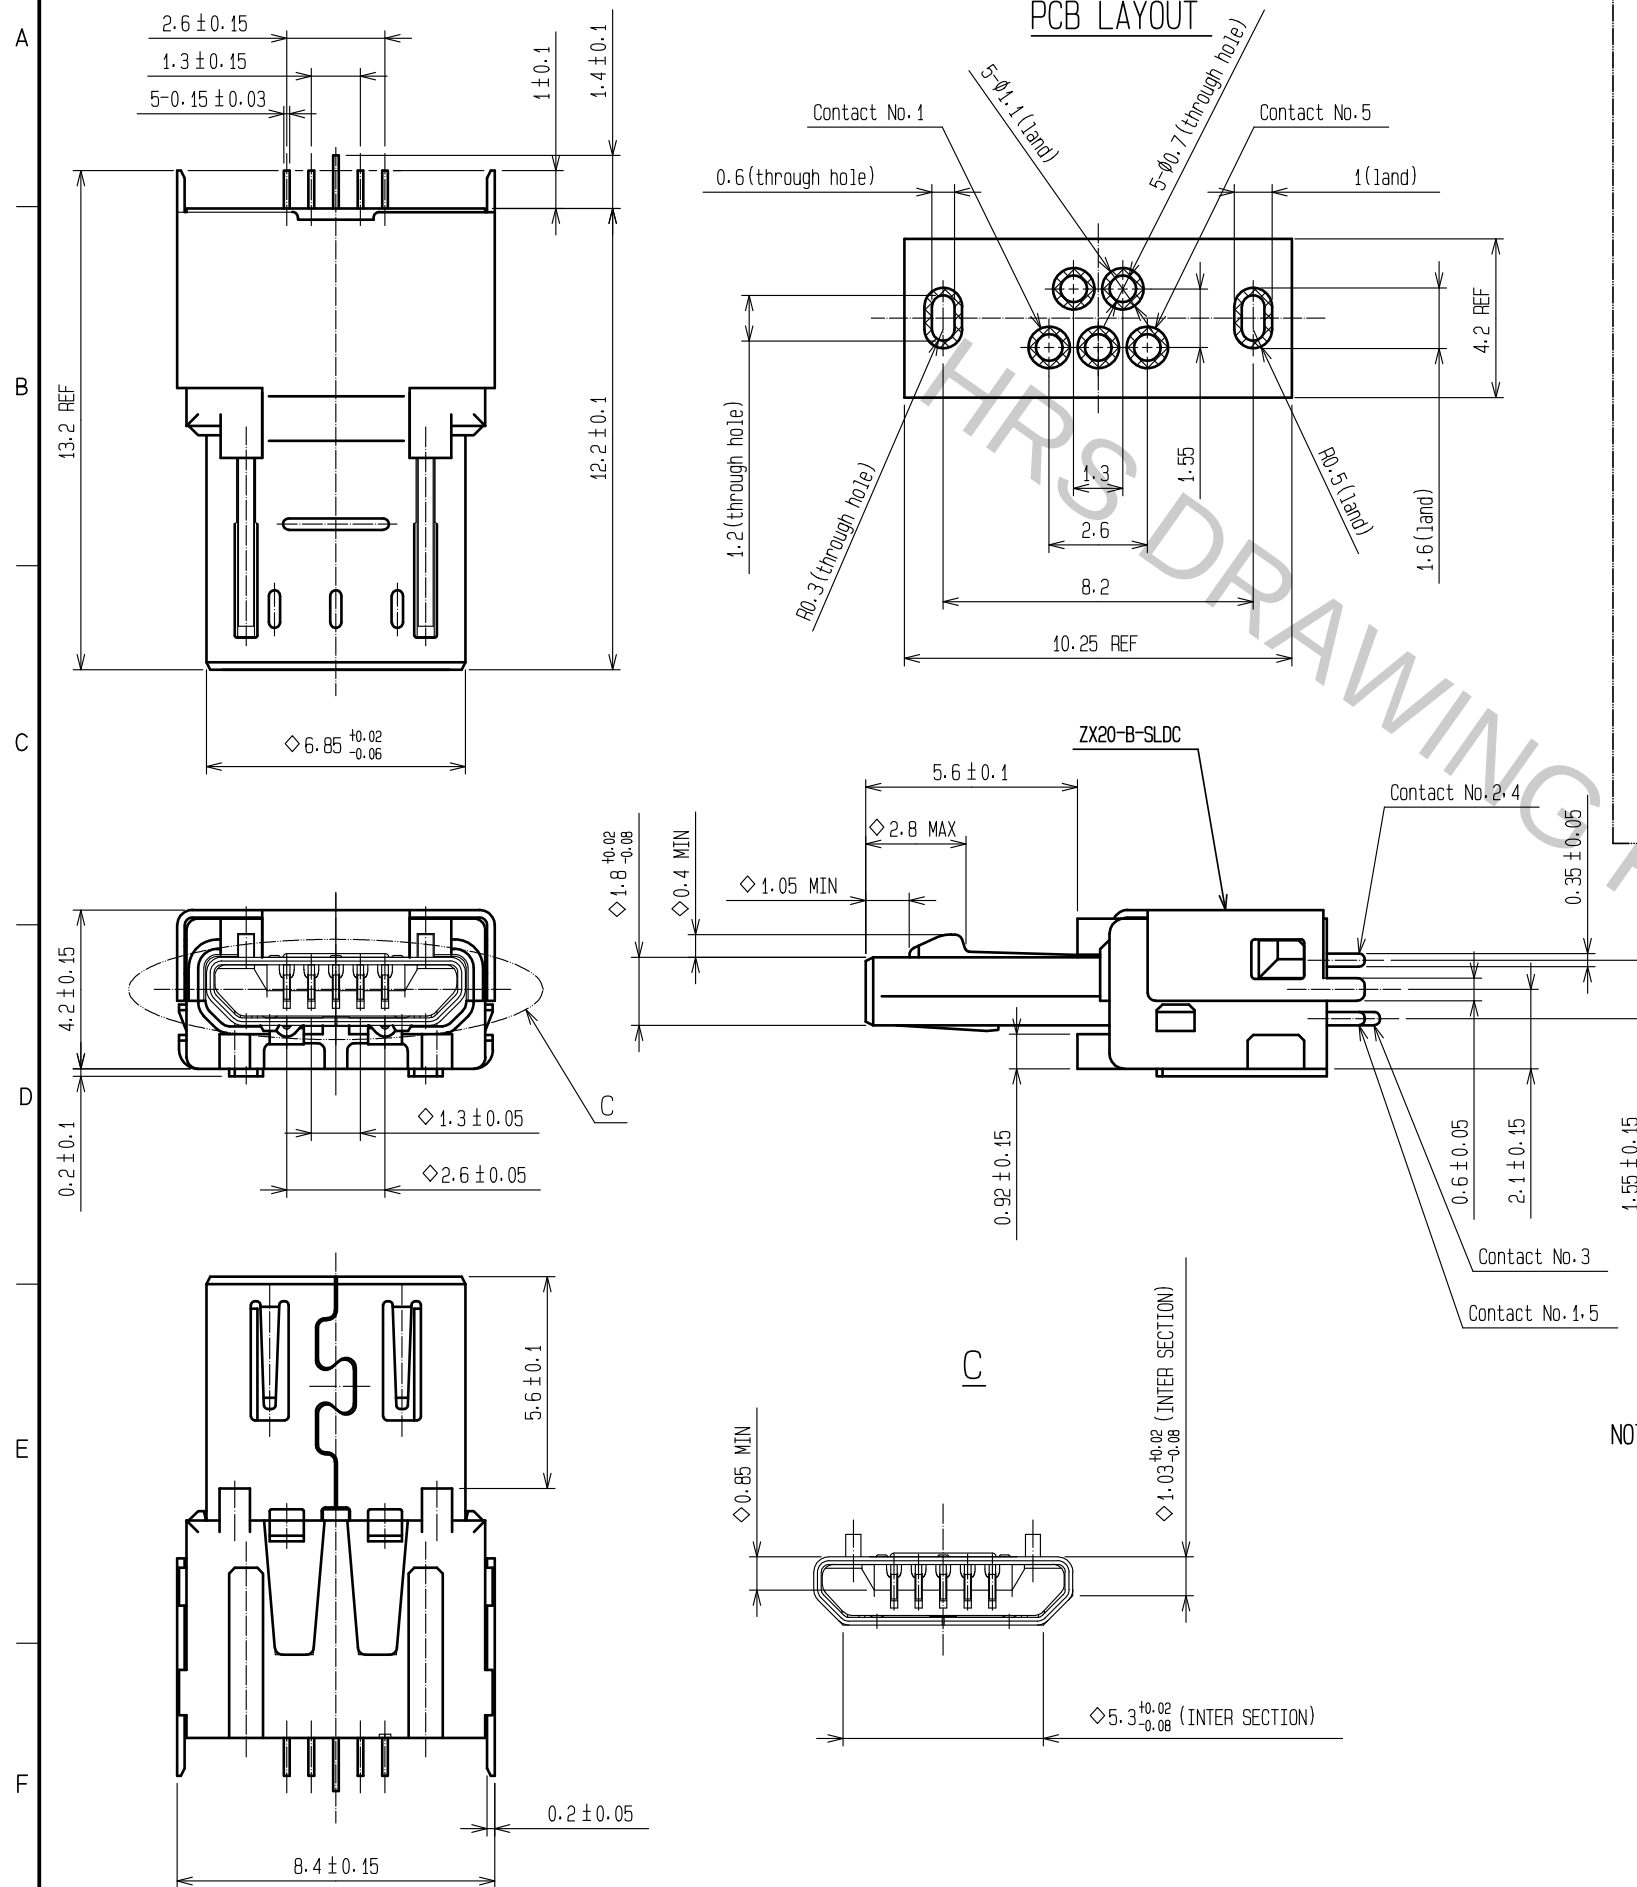


Fig-3 OVER-MOLDING(REFERENCE)

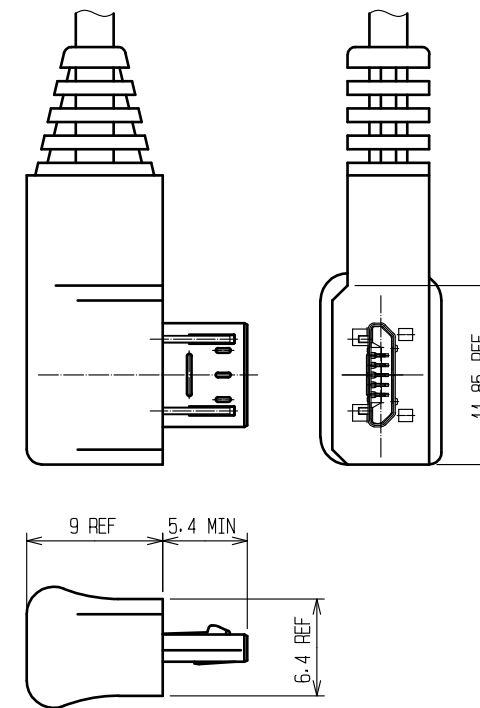


2 ZX20-B-SLDC
Code No. CL242-0022-1

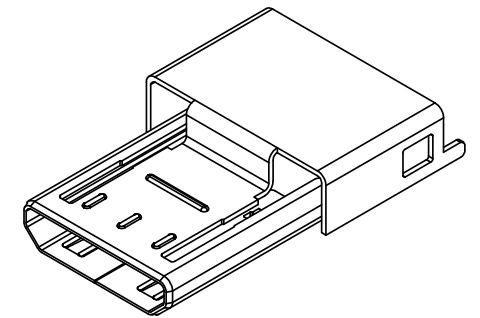

NOTE:
- SOLD SEPARATELY
- DELIVERED BY THE REEL

Fig-4 MATED CONDITION

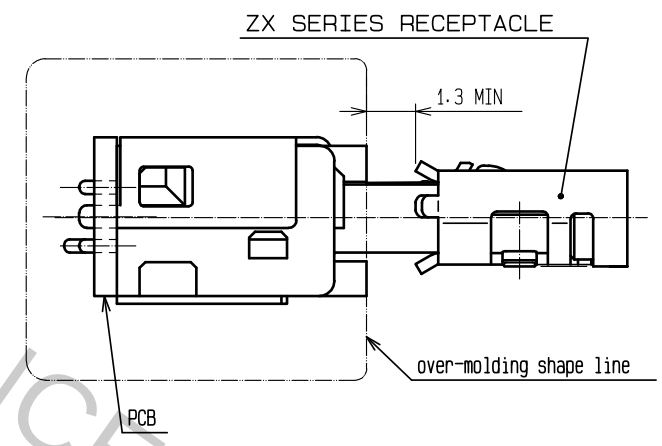

NOTES 2 SHIELDING-PLATE, ZX20-B-SLDC, IS USED FOR ASSEMBLY.

3. *◇*SYMBOL ADDED TO EACH DIMENSION MEANS CRITICAL DIMENSION ON USB SPECIFICATION.
PLEASE CHECK THEM AFTER OVER-MOLDING.

HRS

DRAWING NO.	EDC-126085-30-00
PART NO.	ZX20-B-5S-UNIT<30>
CODE NO.	CL242-0012-8-30

2/2