
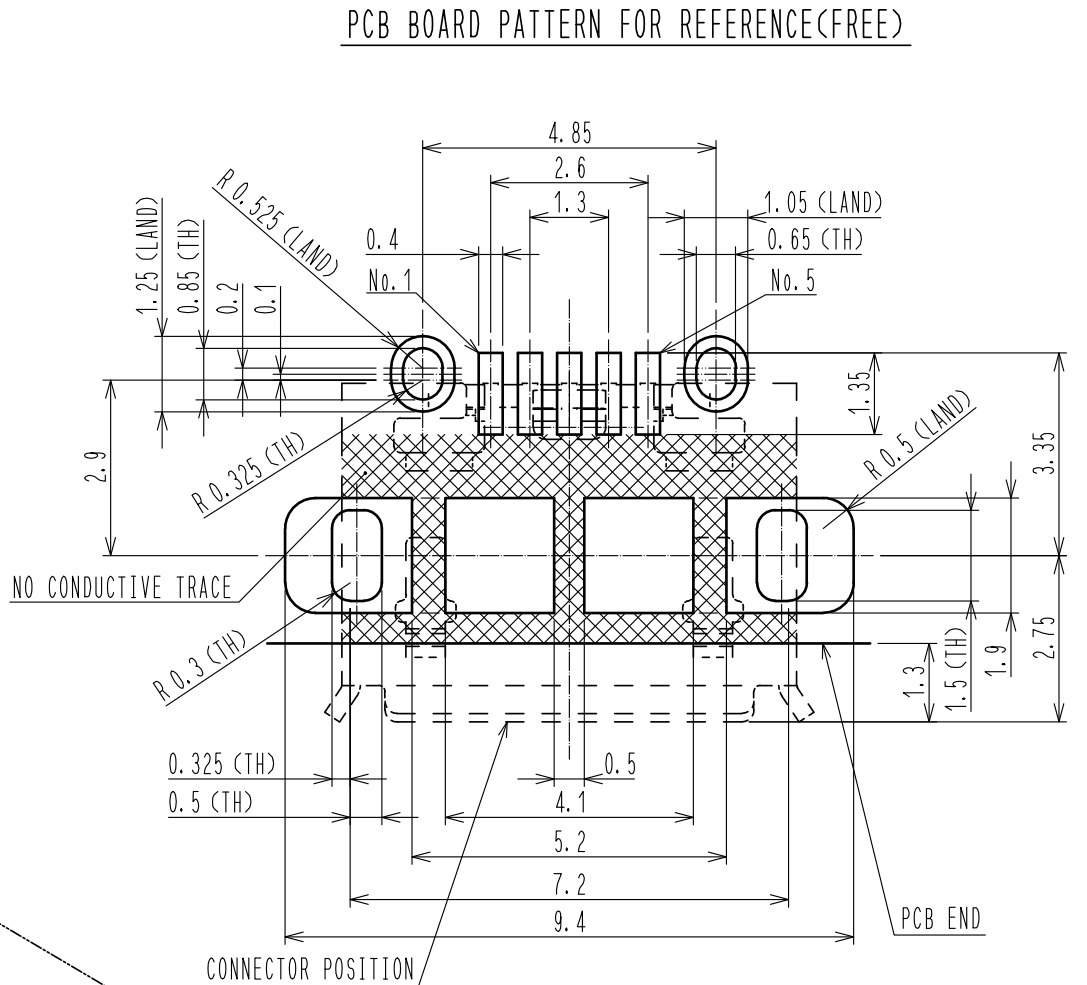
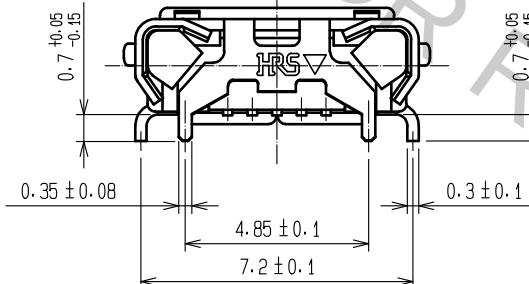
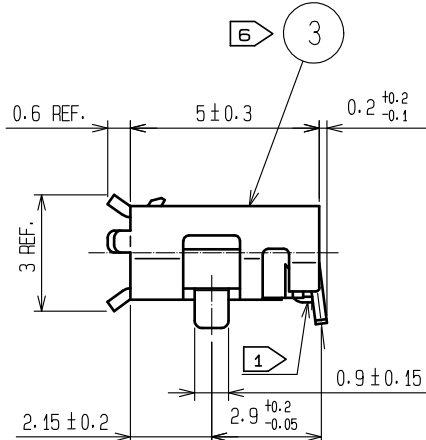
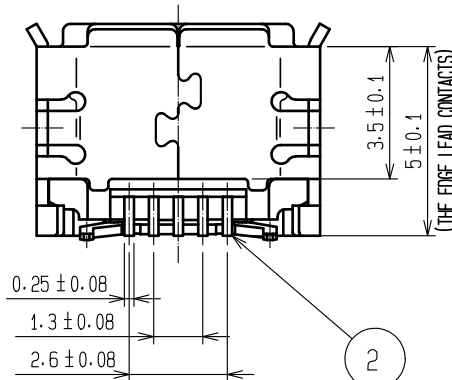
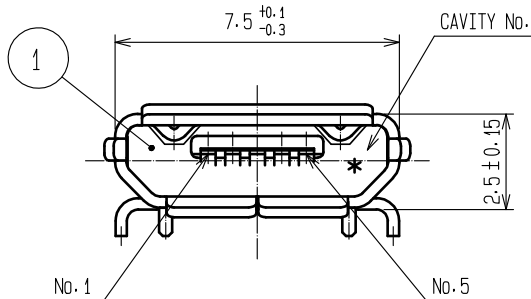


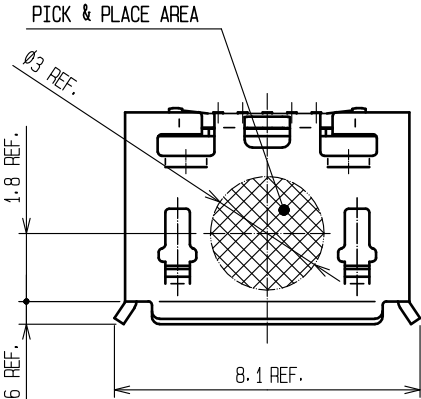


GENERAL TOLERANCE IS $\pm 0.05\text{mm}$

- NOTES.
- ① CO-PLANARITY IS WITHIN 0.08mm MAX.
 - ② PLATING
CONTACT AREA :GOLD 0.05 μ m MIN OVER PALLADIUM NICKEL 0.75 μ m MIN.
LEAD AREA :GOLD 0.05 μ m MIN.
UNDER PLATING:NICKEL 2 μ m MIN.
 - ③ PER REEL : 2000 pcs.
 4. INTERFACE DIMENSIONS TO USB2.0 SPECIFICATION.
 5. AS FOR PART No.3, THE PERFORMANCE REMAINS GOOD EVEN IF THERE IS A RUBBING WOUND BY THE ASSEMBLY PROCESS.
 - ⑥ AS FOR PART No.3, THERE IS NO PROBLEM ON THE QUALITY THOUGH THERE MIGHT BE A DIFFERENCE IN THE COLOR DEPENDING ON THE PLATING PROCESSING LOT.


2	COPPER ALLOY		3	STAINLESS STEEL	OVER PLATING : TIN 3.8μm MIN. UNDER PLATING : NICKEL 1.25μm MIN. LUBRICANT			
1	LCP	BLACK UL94V-0						
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS		
UNITS mm		SCALE 5 : 1	COUNT 	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.			APPROVED : NM. NISHIMATSU	15. 10. 27	DRAWING NO.	EDC-126863-30-00		
			CHECKED : KN. ICHIKAWA	15. 10. 27	PART NO.	ZX62D-B-5PA8(30)		
			DESIGNED : TS. ITO	15. 10. 27	CODE NO.	CL242-0056-3-30		
			DRAWN : AK. AKIYAMA	15. 10. 27				

Oct.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.



PANEL CUTOUT FOR REFERENCE

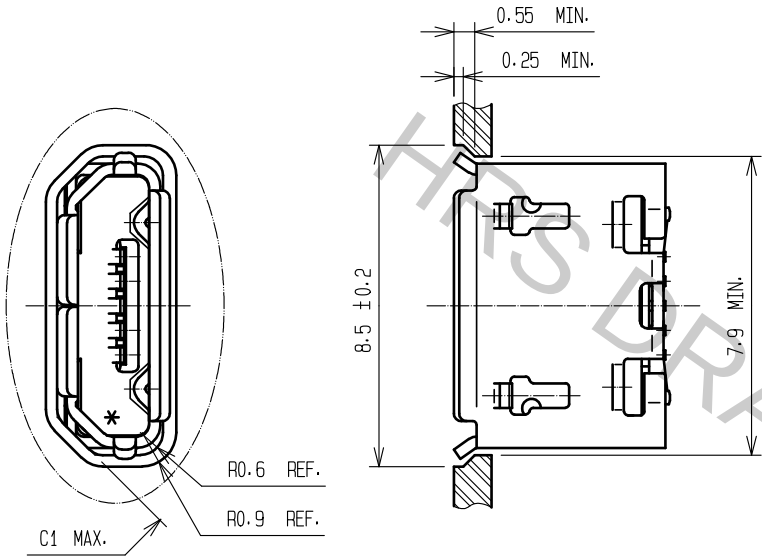

DRAWING FOR PACKING(FREE)

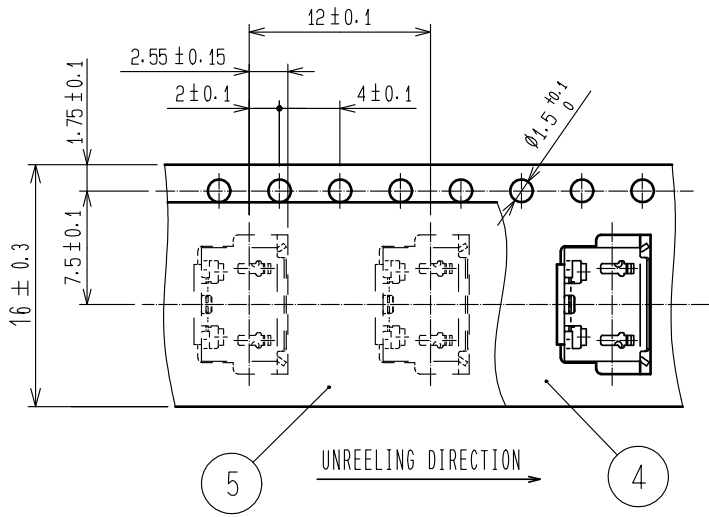

MATED WITH CORRESPONDING PLUG

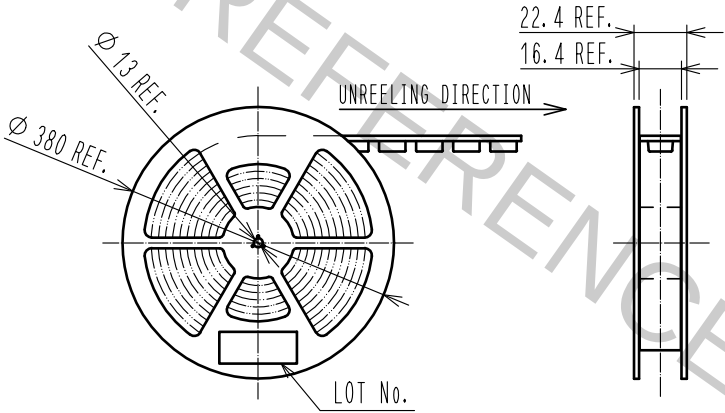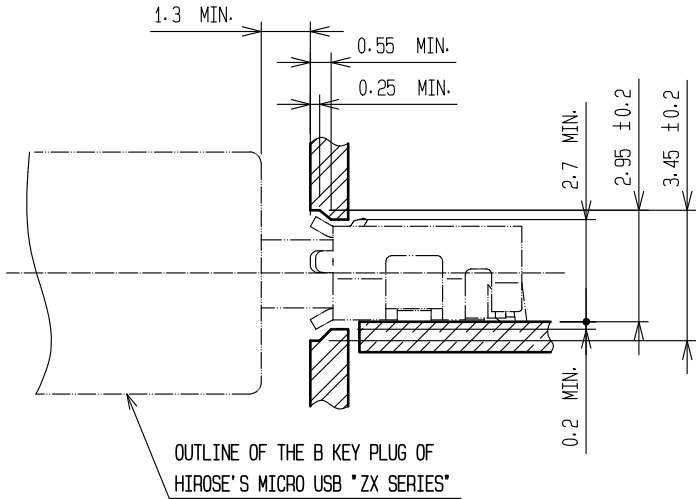

HR5

DRAWING NO.	EDC-126863-30-00
PART NO.	ZX62D-B-5PA8(30)
CODE NO.	CL242-0056-3-30