


THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
—	CLASS A RELEASED	7/11/99	

1. SPRUNG HOOK ADAPTER 5 mm OSCILLOSCOPE PROBES, SNAP-LOCK ATTACHEMENT.
2. SPECIFICATIONS:
INSULATOR: POLYAMIDE (NYLON)
CONTACT: BRASS, NICKEL PLATED
SPRING: SPRING STEEL, NICKEL PLATED
3. RATING:
VOLTAGE: 300 V CAT II
CURRENT: 1 A MAX.
TEMPERATURE: 0° C TO +50°C

CE DECLARATION OF CONFORMITY
CONFORMS TO RoHS 2, ANNEX III 6(c) EXEMPTION.
4. STANDARD PACKAGING:
INDIVIDUAL HOOKS: 10 PCS. PER PACK.

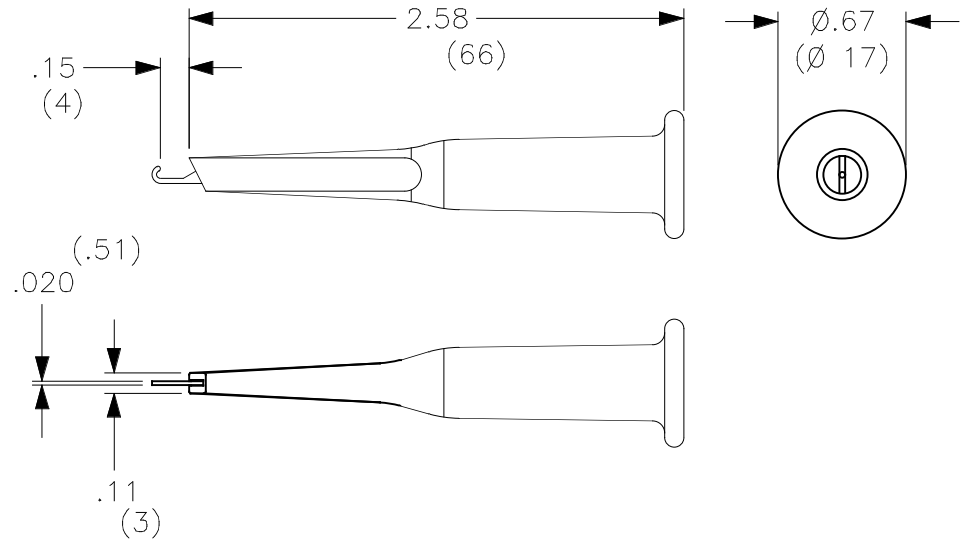

PART NUMBER

CT2709A-#

COLOR: 0 — BLACK
2 — RED
8 — GREY

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ± 1/32 .XX ± .02 .XXX ± .005 DO NOT SCALE DRAWING	CONTRACT NO.		Cal Test Electronics 22820 Savi Ranch Parkway Yorba Linda, CA 92887-4610			
			APPROVALS	DATE	TITLE			
NEXT ASSY		MATERIAL	DRAWN	7/11/99	SPRUNG HOOK, 5 mm, SNAP- LOCK, OSCILLOSCOPE PROBE			
USED ON		FINISH	CHECKED	ENGR.	SIZE	CAGE CODE	DWG. NO.	REV.
APPLICATION			DESIGN ACTIVITY		A	43F45	P2709A0	—
					SCALE	1:1	SHEET	1 OF 1