
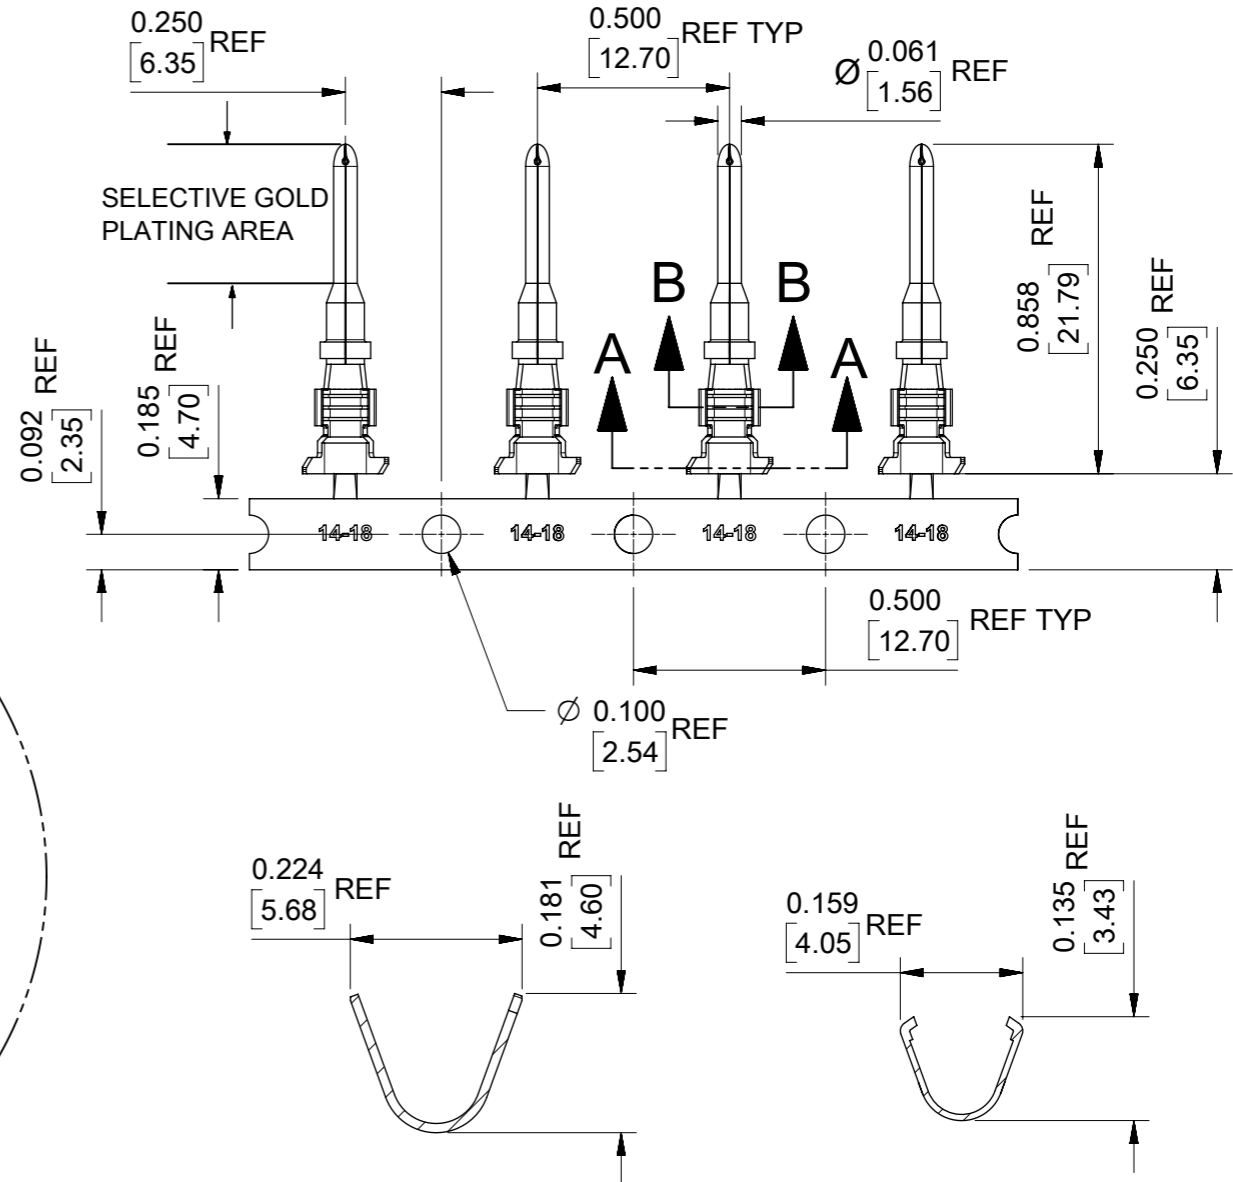


STRIP MATERIAL NUMBER	FINISH
84524-0012	OVERALL NICKEL 80μ" MINIMUM
84524-0018	SELECTIVE HARD GOLD 30μ" MINIMUM OVER NICKEL 50μ" MINIMUM ALL OVER

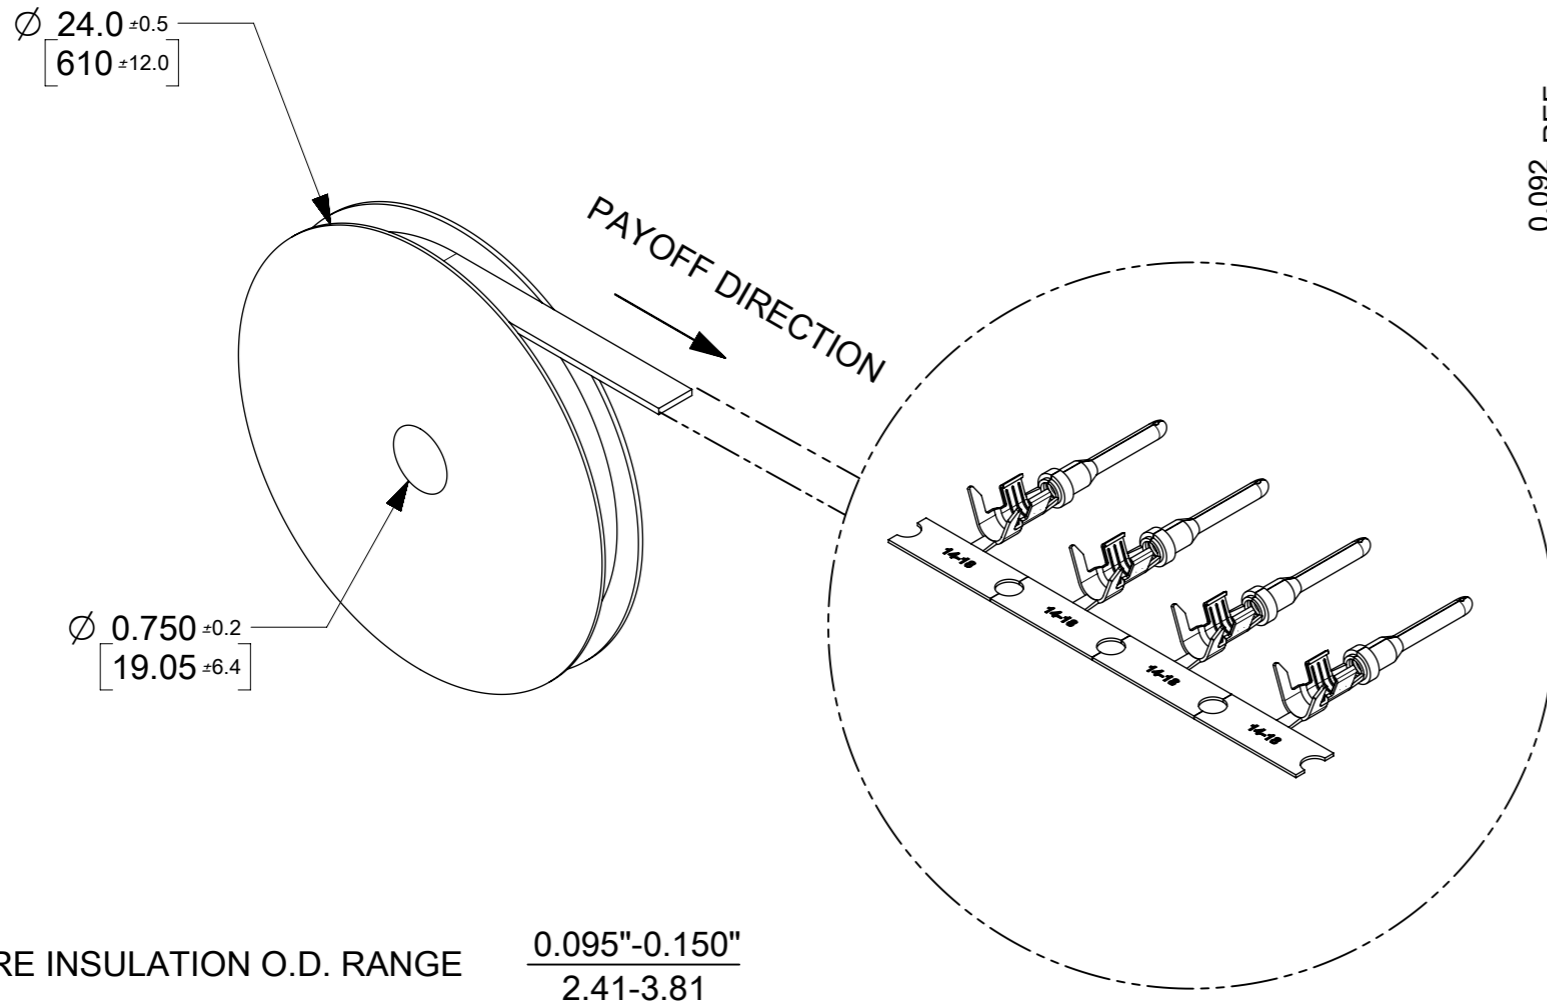

SECTION A-A  
INSULATION CRIMP

SECTION B-B  
CONDUCTOR CRIMP

- NOTES:
1. MATERIAL: COPPER ALLOY .0118/0.300 THICK.
  2. FINISH: SEE CHART.
  3. STRIP PARTS ARE REELED 3000 PARTS PER REEL AS SHOWN ABOVE.
  4. TERMINAL FOR USE ON XRC & ML-XT CONNECTOR ASSEMBLIES.
  5. TERMINALS COMPLY WITH SECTION 5.3.2 OF THE SAE J1939-11 STANDARD FOR SURFACE VEHICLE RECOMMENDED PRACTICE.

SYMBOLS	DIMENSION UNITS	SCALE	CURRENT REV DESC: UPDATED PIN TIP		
▽ = 0	INCH/[mm]	2:1	<p><b>molex</b></p> <p>XRC PIN TERMINAL 14-18 AWG 0.095"-0.150" WIRE Ø</p> <p>PRODUCT CUSTOMER DRAWING</p>		
▽ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)				
▽ = 0	ANGULAR TOL ± 2.0°		EC NO: 168799	2017/11/21	
▽ = 0	4 PLACES ±		DRWN: JFLETCHER	2018/02/12	
▽ = 0	3 PLACES ±		CHK'D: JDWALLACE	2018/02/20	
▽ = 0	2 PLACES ± 0.13		APPR: JDWALLACE		
▽ = 0	1 PLACE ± 0.2		INITIAL REVISION:		
▽ = 0	0 PLACES ±		DRWN: JFLETCHER	2016/01/26	
▽ = 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPR: JALEXANDER	2016/02/23	
▽ = 0	THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER
			A3-SIZE	84524	845240030
			CUSTOMER		DOC TYPE
			GENERAL MARKET		PSD
			SHEET NUMBER		000
					B
					1 OF 1