

CUSTOMER PRINT


- NOTES:
 1. FINISHED CABLE ASSEMBLY TO BE COILED
 2. OVERMOLD BOOT MATERIAL: PVC, BLACK
 3. ELECTRICAL TEST: 100% CONTINUITY
 4. ALL DIMENSIONS ARE REFERENCE ONLY EXCEPT WHEN NOTED WITH TOLERANCE

ASS'Y P/N	NO. OF POS.
CARA62802SXXXDF	2
CARA62803SXXXDF	3
CARA62804SXXXDF	4
CARA62805SXXXDF	5
CARA62806SXXXDF	6
CARA62807SXXXDF	7
CARA62808SXXXDF	8
CARA6280XSXXXDF	


ASS'Y P/N	"X" DIM.
CARA6280XS039DF	3 FT. 3 1/2 IN. ± 2 IN. [1M]
CARA6280XS079DF	6 FT. 7 IN. ± 2 IN. [2M]
CARA6280XS197DF	16 FT. 5 IN. ± 4 IN. [5M]
CARA6280XS394DF	32 FT. 9 3/4 IN. ± 8 IN. [10M]
CARA6280XSXXXDF	

CABLE LENGTH IN "INCHES"
 NO. OF POSITIONS


CABLE LENGTH IN "INCHES"
 NO. OF POSITIONS

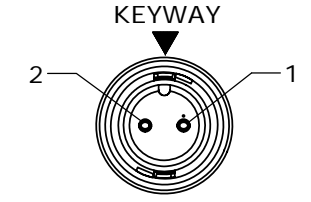


END "A" & "B"
 FACE VIEW
 P/N: CARA62802SXXXDF

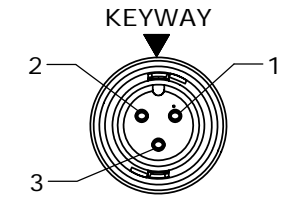


END "A" & "B"
 FACE VIEW
 P/N: CARA62803SXXXDF

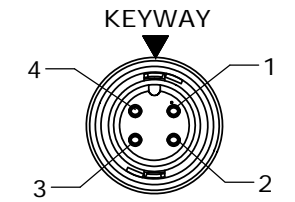


END "A" & "B"
 FACE VIEW
 P/N: CARA62804SXXXDF

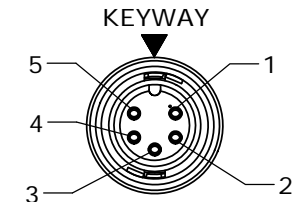


END "A" & "B"
 FACE VIEW
 P/N: CARA62805SXXXDF

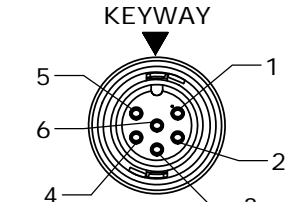



END "A" & "B"
 FACE VIEW
 P/N: CARA62806SXXXDF

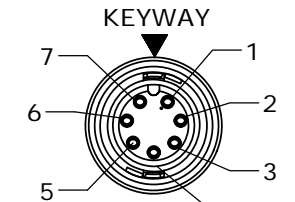

END "A" & "B"
 FACE VIEW
 P/N: CARA62807SXXXDF

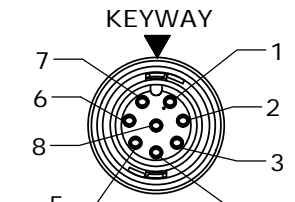


END "A" & "B"
 FACE VIEW
 P/N: CARA62808SXXXDF

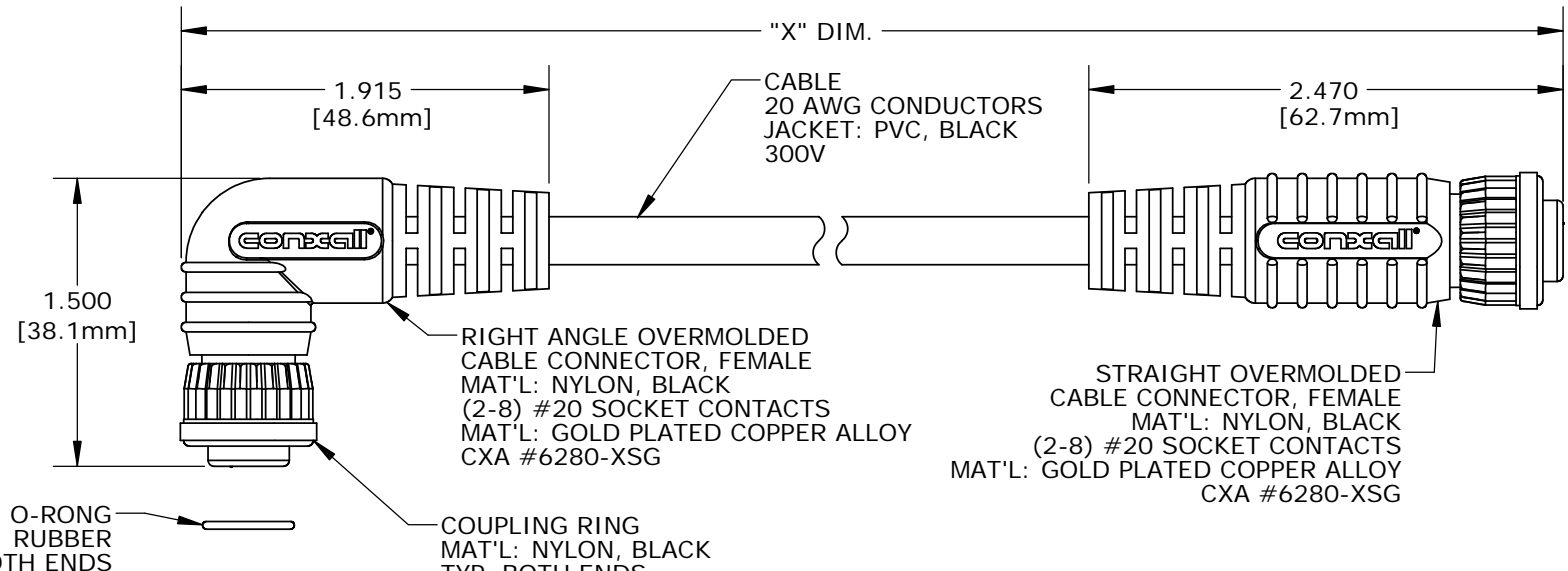

END "B"
 FACE VIEW
 P/N: CARA62806SXXXDF

ASSY P/N	CABLE	COLOR CODE ENDS "A" & "B"							
CARA62802SXXXDF	2/20 AWG O.D. 0.215 REF	COLOR CODE							
		POS. 1	POS. 2						
CARA62803SXXXDF	3/20 AWG O.D. 0.220 REF	WIRE COLOR CODE							
		POS. 1	POS. 2	POS. 3					
		BLK	WHT	GRN					
CARA62804SXXXDF	4/20 AWG O.D. 0.235 REF	WIRE COLOR CODE							
		POS. 1	POS. 2	POS. 3	POS. 4				
		BLK	WHT	GRN	RED				
		WIRE COLOR CODE							
CARA62805SXXXDF	5/20 AWG O.D. 0.255 REF	POS. 1	POS. 2	POS. 3	POS. 4	POS. 5			
		BLK	WHT	GRN	RED	BLU			
		WIRE COLOR CODE							
		POS. 1	POS. 2	POS. 3	POS. 4	POS. 5	POS. 6		
		BLK	WHT	GRN	RED	BLU	VIO		
CARA62807SXXXDF	8/20 AWG O.D. 0.300 REF	WIRE COLOR CODE							
		POS. 1	POS. 2	POS. 3	POS. 4	POS. 5	POS. 6	POS. 7	
		BLK	WHT	GRN	RED	BLU	VIO	GRY	
		WIRE COLOR CODE							
		POS. 1	POS. 2	POS. 3	POS. 4	POS. 5	POS. 6	POS. 7	POS. 8
		BLK	WHT	GRN	RED	BLU	VIO	GRY	BRN
		WIRE COLOR CODE							
CARA62808SXXXDF	8/20 AWG O.D. 0.300 REF	POS. 1	POS. 2	POS. 3	POS. 4	POS. 5	POS. 6	POS. 7	POS. 8
		BLK	WHT	GRN	RED	BLU	VIO	GRY	BRN

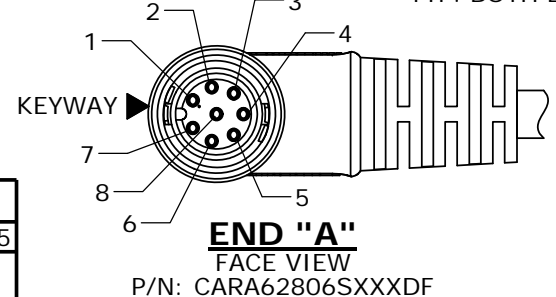

END "A"
 FACE VIEW
 P/N: CARA62806SXXXDF

CUSTOMER APPROVAL
 THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT / INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.
 APPROVED BY: _____
 DATE: _____

DIMENSIONS IN BRACKET [] ARE METRIC.

RoHS COMPLIANT

A	AN	02-22-18	DRAWING CREATED PER DOR 17-8167JS
REV.	INIT.	DATE	DESCRIPTION
	AN	02-22-18	
<small>ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.</small>			<p>601 E. WILDWOOD VILLA PARK, IL 60181</p>
<small>ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.</small>			
APPROVED BY:		TITLE:	
DATE:		CABLE ASSEMBLY (2-8) #20 CONTACTS, FEMALE/FEMALE MINI-CON-X, R. ANGLE-STRAIGHT STANDARD PRODUCT	
SCALE	SIZE	SHEET	CUSTOMER:
NTS	B	1 OF 1	CARA6280XSXXXDF
FILE:	DIRECTORY:	PART NUMBER:	REV
CARA6280XSXXXDF	SLW	CARA6280XSXXXDF	A