



THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK, POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

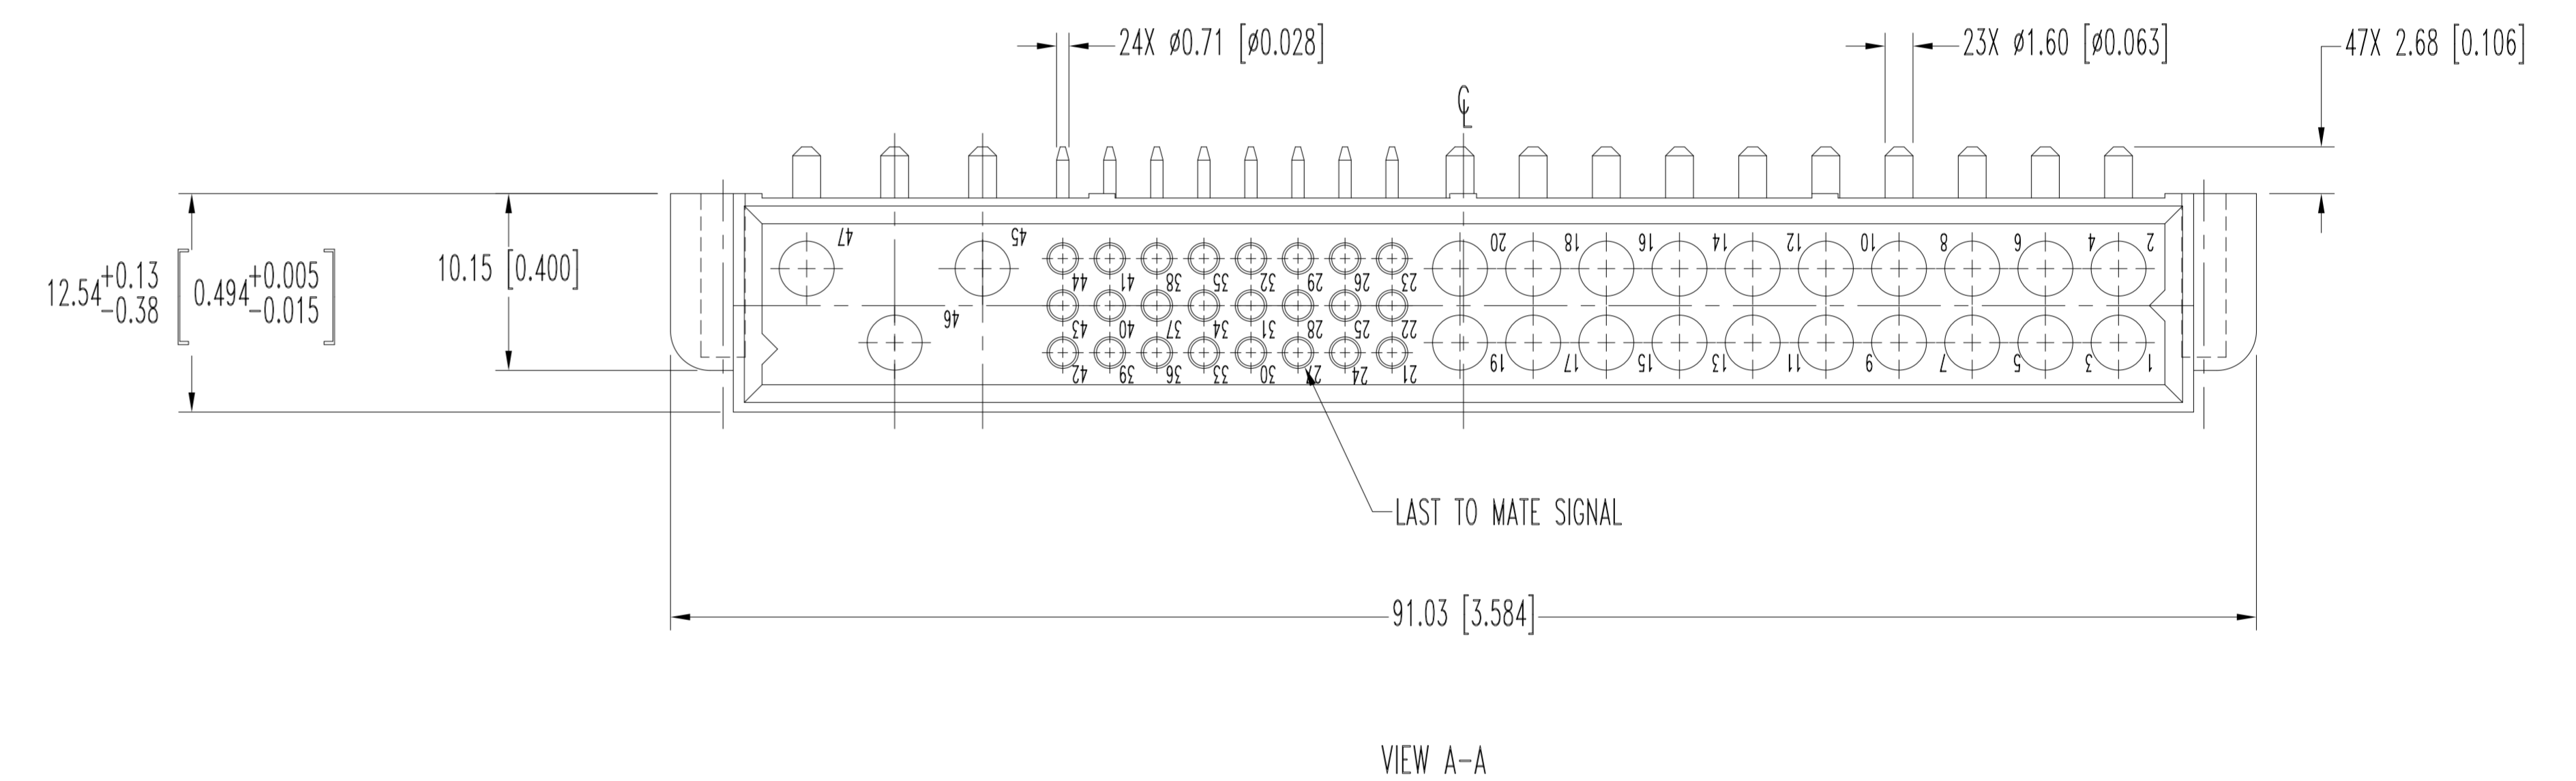

SK3216 SHEET 1 OF 2		APP	DR	CK		
DATE	REV	ECO	72020	RK	PY	ND

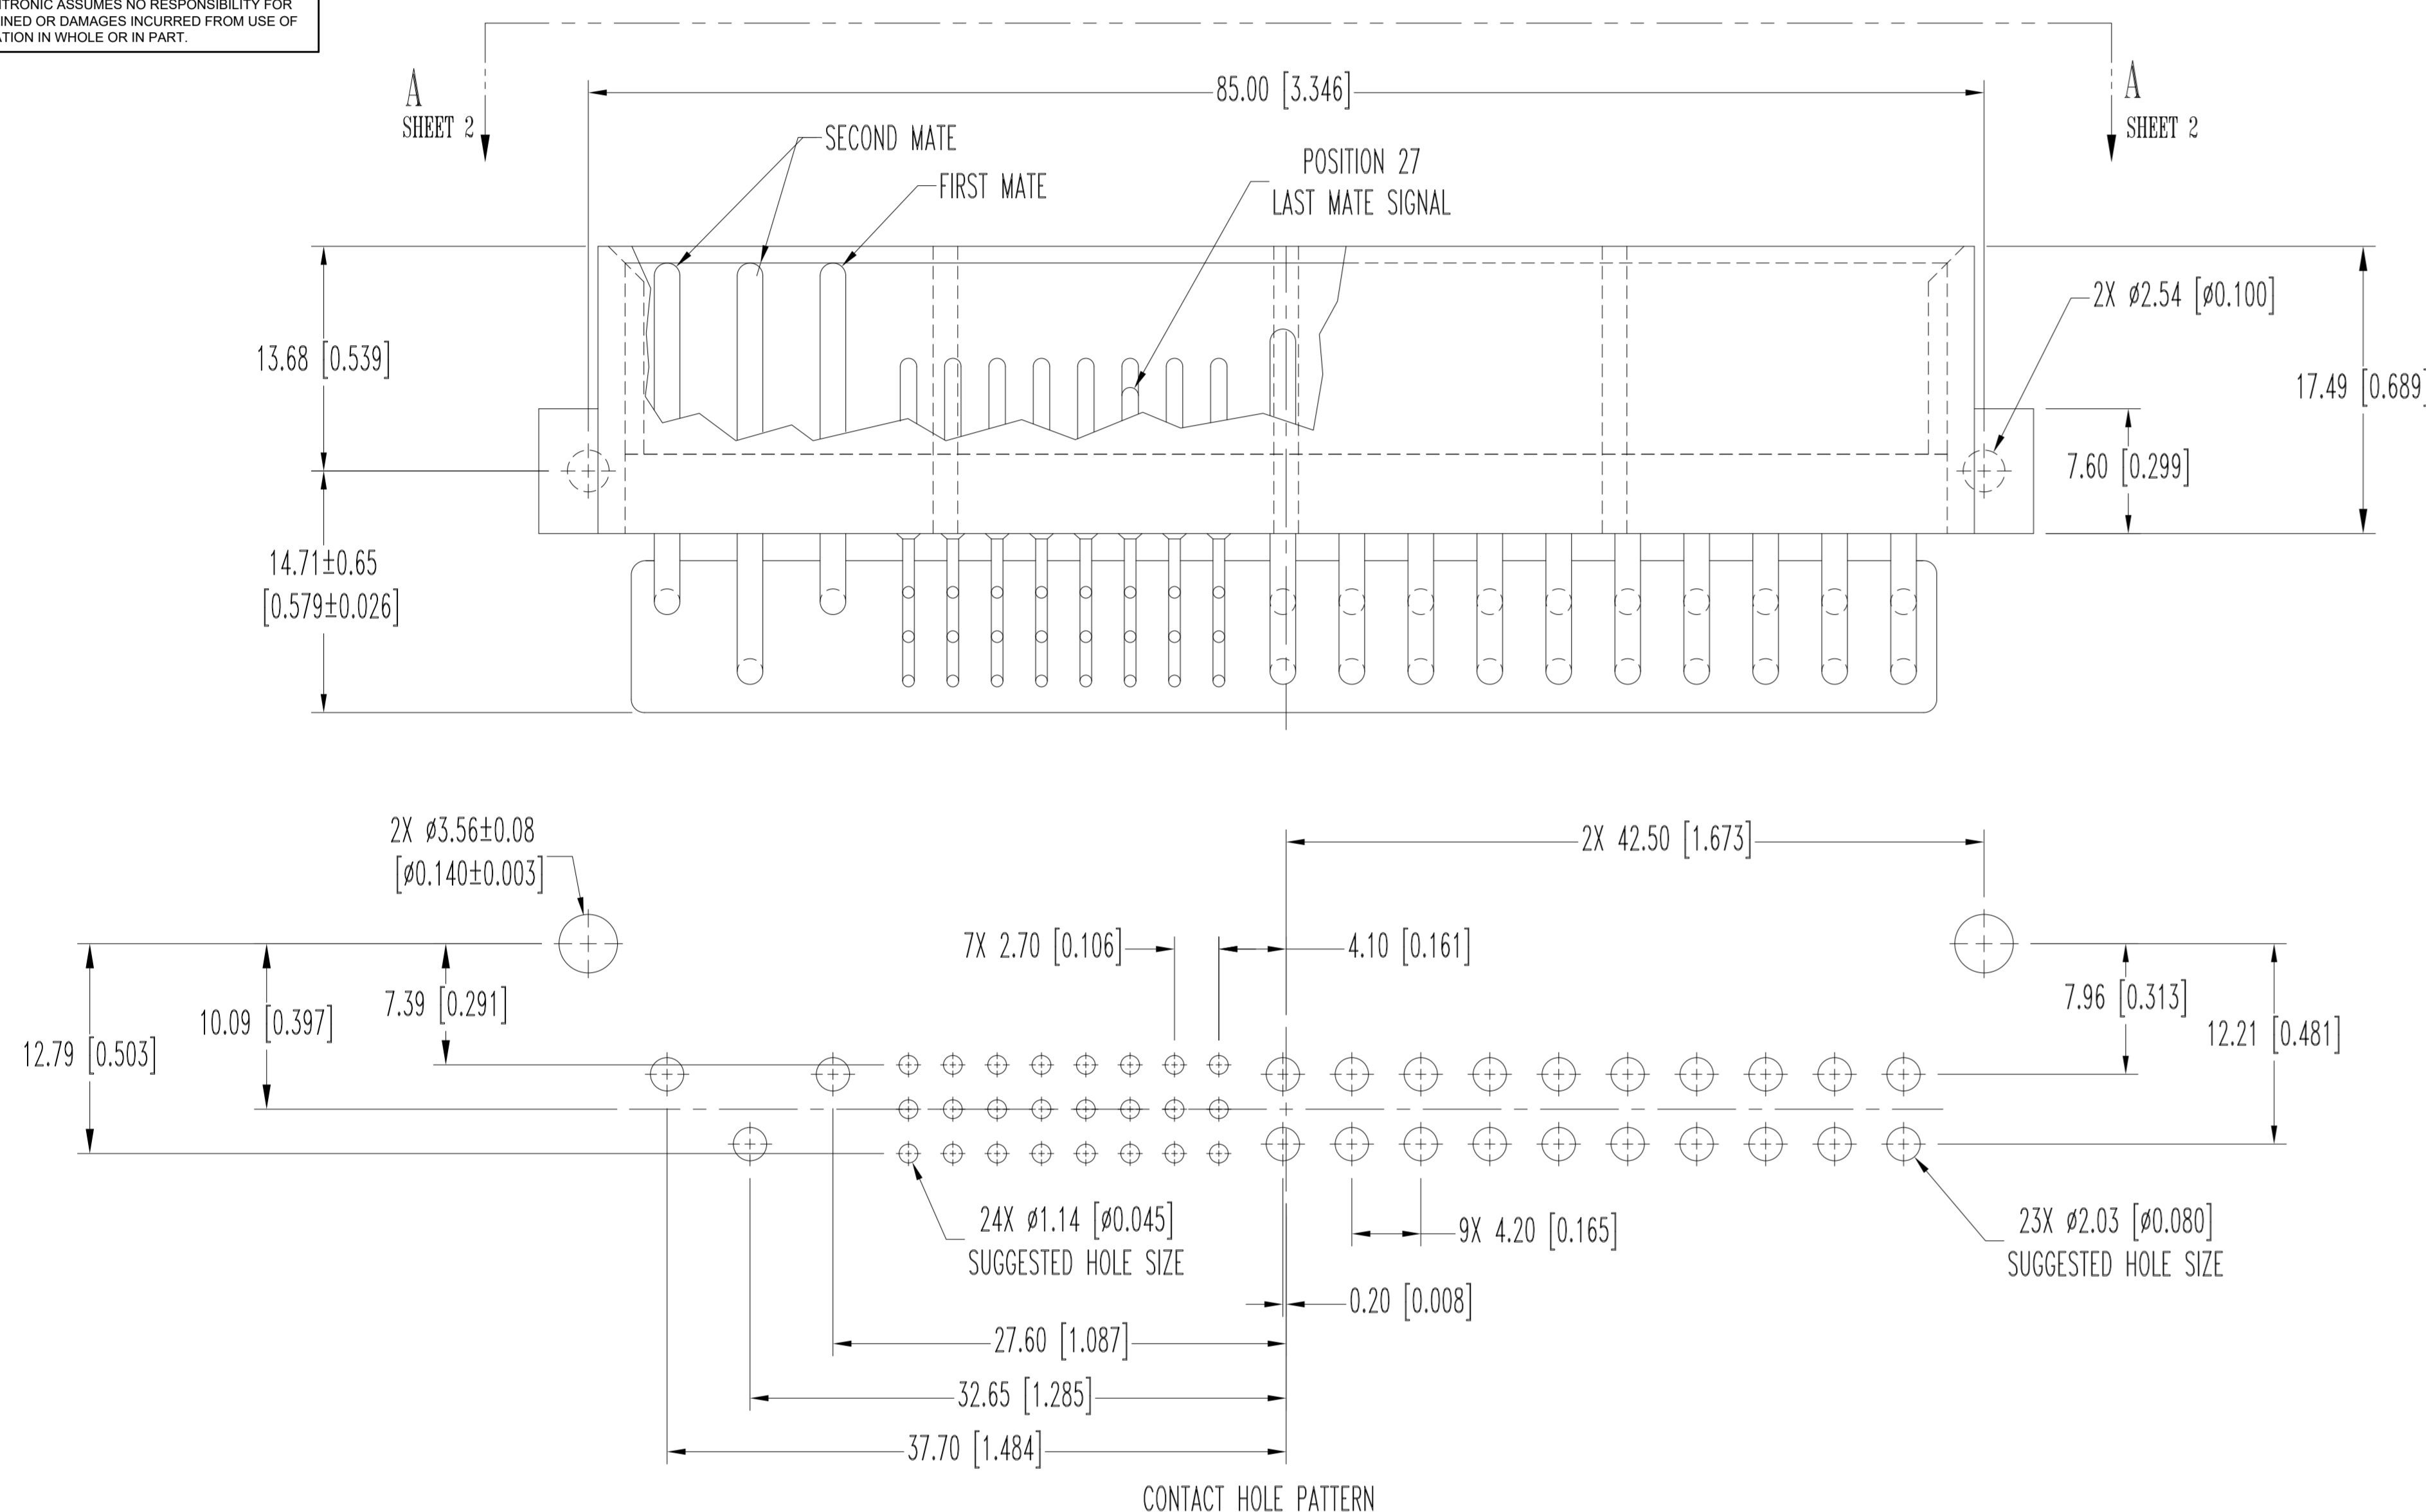

- NOTES:
- MATERIALS AND FINISHES:
 INSULATOR: GLASS-FILLED POLYESTER, UL 94V-0, COLOR: BLUE.
 SIZE 16 CONTACTS: HIGH CONDUCTIVITY PRECISION MACHINED-COPPER ALLOY WITH GOLD FLASH OVER NICKEL ON MATING END AND TERMINATION END.
 SIZE 22 CONTACTS: PRECISION MACHINED COPPER ALLOY, WITH GOLD FLASH OVER NICKEL ON MATING END AND TERMINATION END.
 ALIGNMENT BAR: GLASS-FILLED POLYESTER, UL 94V-0, COLOR: BLUE.
 - DETAILED PRODUCT, MECHANICAL AND ELECTRICAL INFORMATION IS AVAILABLE IN THE LATEST COMPACT POWER PRODUCT PUBLICATION AT CONNECTPOSITRONIC.COM.
 - DIMENSIONS ARE IN MILLIMETERS [INCHES].

	POSITRONIC INDUSTRIES INC. SPRINGFIELD, MISSOURI 65801	
	PCI SERIES DECIMAL TOL. ± 0.38 [0.015]	SCALE N.T.S.
WF # 3936 ANGULAR TOL. ± 3°	TITLE PCIH47M400A1	
DATE 10-21-99	DRAWING NUMBER SK3216	REV. SHEET 1 OF 2 F