
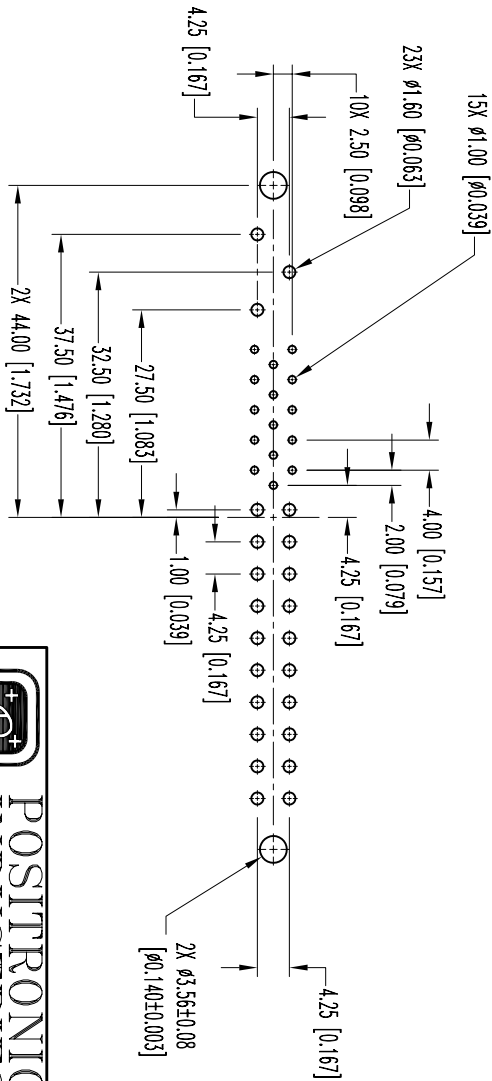
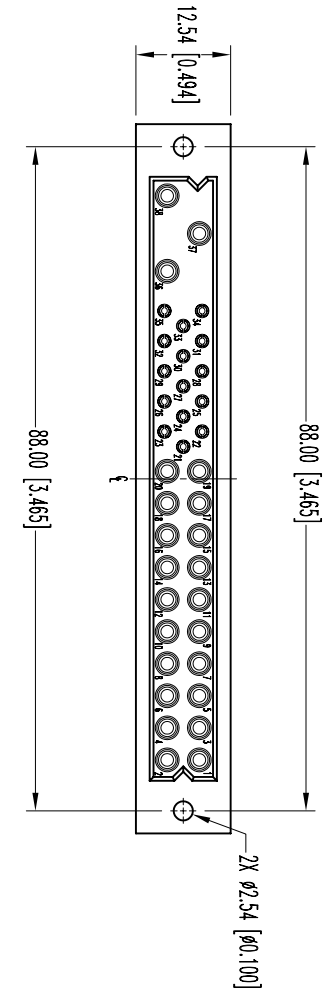


POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION. POSITRONIC INDUSTRIES ASSUMES NO LIABILITY OR RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

SK8063

DATE	REV	REVISION RECORD	APP	DR	CK
10-16-06	NC	ECO 26869		YK	

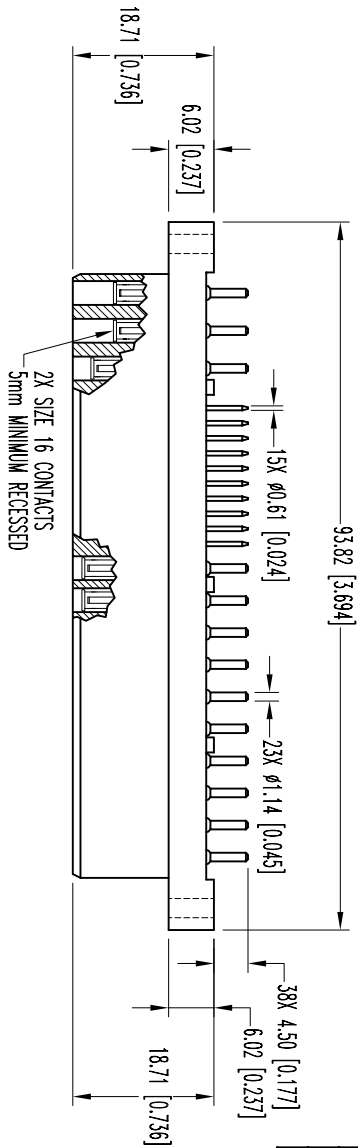

CONTACT HOLE PATTERN

# NOTES:

## 1. MATERIALS AND FINISHES:

INSULATOR: GLASS FILLED POLYESTER, UL 94V-0, COLOR BLUE.

SIZE 16 CONTACTS: HIGH CONDUCTIVITY COPPER ALLOY WITH GOLD FLASH OVER NICKEL.

SIZE 20 CONTACTS: PRECISION MACHINED COPPER ALLOY WITH GOLD FLASH OVER NICKEL.

## 2. ELECTRICAL CHARACTERISTICS:

CONTACT CURRENT RATING:

SIZE 16 CONTACTS: POSITIONS 36, 37, 38: 40 AMPERES CONTINUOUS, ALL CONTACTS UNDER LOAD.

POSITIONS 1-20: 28 AMPERES CONTINUOUS, ALL CONTACTS UNDER LOAD.

SIZE 20 CONTACTS: 5 AMPERES NOMINAL.

INITIAL CONTACT RESISTANCE, PER IEC 512-2 TEST 2B.

SIZE 16 CONTACTS: 0.0007 OHMS.

SIZE 20 CONTACTS: 0.004 OHMS

INSULATION RESISTANCE: 5 G OHMS PER IEC 512-2, TEST 3a, METHOD A.

CREEPAGE AND CLEARANCE DISTANCE: MINIMUM:

CONTACT 38 TO CONTACT 36: 3.2 [0.126]

CONTACT 37 TO CONTACT 36: 3.2 [0.126]

CONTACT 38 TO SIGNAL CONTACTS: 6.4 [0.252]

CONTACT 37 TO SIGNAL CONTACTS: 6.4 [0.252]

CONTACT 38 TO CONTACT 37 : 2.5 [0.098]

CONTACT 36 TO SIGNAL CONTACTS: 2.0 [0.079]

WORKING VOLTAGE:

CONTACTS 36, 37 AND 38: 1,000 V r.m.s.

CONTACTS 1 THROUGH 20: 500 V r.m.s.

CONTACTS 21 THROUGH 35: 333 V r.m.s.


3. WORKING TEMPERATURE: -55°C TO +125°C.

4. CONNECTORS ARE ROHS COMPLIANT PER ROHS DIRECTIVE 2002/95/EC OF 27 JAN 2003.

5. DIMENSIONS ARE IN MILLIMETERS [INCHES].



POSITRONIC  
INDUSTRIES INC.  
www.connectpositronic.com



DECIMAL TOL.  
± 0.38 [0.015]

PCIH SERIES

SCALE  
N.T.S.

DRAWN BY  
YK

REV.

NC

DATE  
10-16-06

DRAWING NUMBER  
SK8063

PCIH38F300A1/AA