
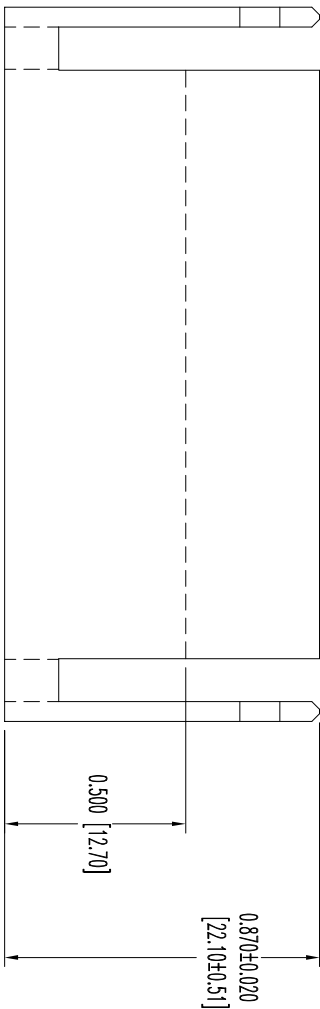



THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO CONNECT POSITRONIC, INC. AND IS TO BE USED ONLY FOR THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION. CONNECT POSITRONIC, INC. ASSUMES NO LIABILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

SK12325

DATE	REV	REVISION RECORD	APP	DR	CK
4-25	11	NC	ECO	33930	COLB BS COLB
2-28	13	A	ECO	38605	COLB BE COLB

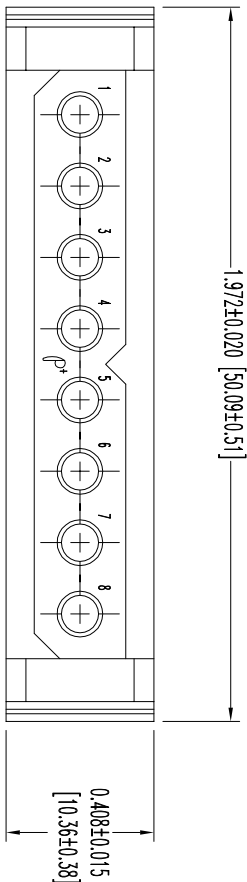

NOTES:

1. MATERIALS AND FINISHES:

INSULATOR: GLASS FILLED POLYESTER, UL 94V-0, COLOR: BLUE.

2. DETAILED PRODUCT, MECHANICAL, AND ELECTRICAL INFORMATION IS AVAILABLE IN THE LATEST POWER CONNECTION SYSTEMS PRODUCT PUBLICATION. VISIT

CONNECTPOSITRONIC.COM/PRODUCTS/20/POWERCONNECTIONSYSTEMS OR CONNECTPOSITRONIC.COM.

3. CONNECTORS ARE COMPLIANT TO THE CURRENT ROHS DIRECTIVE.

4. DIMENSIONS ARE IN INCHES [MILLIMETERS].



POSITRONIC INDUSTRIES INC.
www.connectpositronic.com

FSCM 28198



DECIMAL TOL.
± 0.015 [0.38]

PCS SERIES

SCALE
N.T.S.

DRAWN BY
B SHELLBY

COLB

TITLE

PLA08M7000/AA

DATE

4-25-11

DRAWING NUMBER

SK12325

REV.

A