
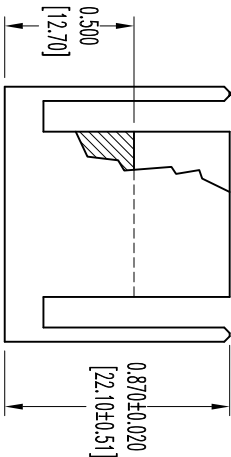



THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND IS ASSIGNED TO BE HELD IN SECRECY. THE INFORMATION IS GIVEN FREE OF CHARGE. THE USER EMPLOY'S SUCH INFORMATION AT HIS OWN DISCRETION AND ASSUMES ALL RESPONSIBILITY FOR ANY RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

SK6765

DATE	REV	REVISION RECORD	APP	DR	OK
11-29-05	NC	ECO 25113	RM	YK	COLE
3-5-12	A	ECO 35322	COLE	MP	COLE



NOTES:

1. MATERIALS AND FINISHES:

INSULATOR: GLASS FILLED POLYESTER, UL 94V-0, COLOR BLUE.

2. DETAILED PRODUCT, MECHANICAL, AND ELECTRICAL INFORMATION IS AVAILABLE IN THE LATEST POWER CONNECTION SYSTEMS

PRODUCT PUBLICATION. VISIT CONNECTPOSITRONIC.COM/PRODUCTS/20/POWERCONNECTIONSYSTEMS OR CONNECTPOSITRONIC.COM.

3. CONNECTORS ARE ROHS COMPLIANT PER ROHS DIRECTIVE 2002/95/EC OF 27 JAN 2003.

4. DIMENSIONS ARE IN INCHES [MILLIMETERS].



POSITRONIC
INDUSTRIES INC.
www.connectpositronic.com

FSC® 28198



DECIMAL TOL.
± 0.015 [0.38]

PCS SERIES

SCALE
N.T.S.

DRAWN BY
YK

TITLE

PLA03M0000/AA

ANGULAR TOL.
± 5°

DATE
11-29-05

DRAWING NUMBER
SK6765

REV.
A