
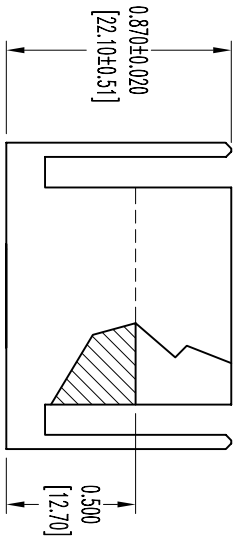



POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE. THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION. POSITRONIC INDUSTRIES ASSUMES NO LIABILITY OR RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

SK6766

DATE	REV	REVISION RECORD	APP	DR	CK
11-29-05	NC	ECO 25113		YK	

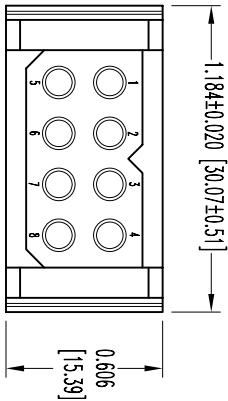

- NOTES:
1. MATERIALS AND FINISHES:  
INSULATOR: GLASS FILLED POLYESTER, UL 94V-0, COLOR BLUE.
  2. ELECTRICAL CHARACTERISTICS:  
INSULATOR RESISTANCE: 5 G OHMS PER IEC 512-2, TEST 3a, METHOD A.  
WORKING VOLTAGE: 600 VAC.
  3. WORKING TEMPERATURE: -55°C TO +125°C
  4. CONNECTORS ARE ROHS COMPLIANT PER ROHS DIRECTIVE 2002/95/EC OF 27 JAN 2003.
  5. DIMENSIONS ARE INCHES [MILLIMETERS]



POSITRONIC  
INDUSTRIES INC.  
www.connectpositronic.com



DECIMAL TOL.  
± 0.015 [0.38]

PCS SERIES

SCALE  
N.T.S.

DRAWN BY  
YK

ANGULAR TOL.  
± 5°

DATE  
11-29-05

DRAWING NUMBER  
SK6766

REV.  
NC

TITLE  
PLB08M0000/AA