
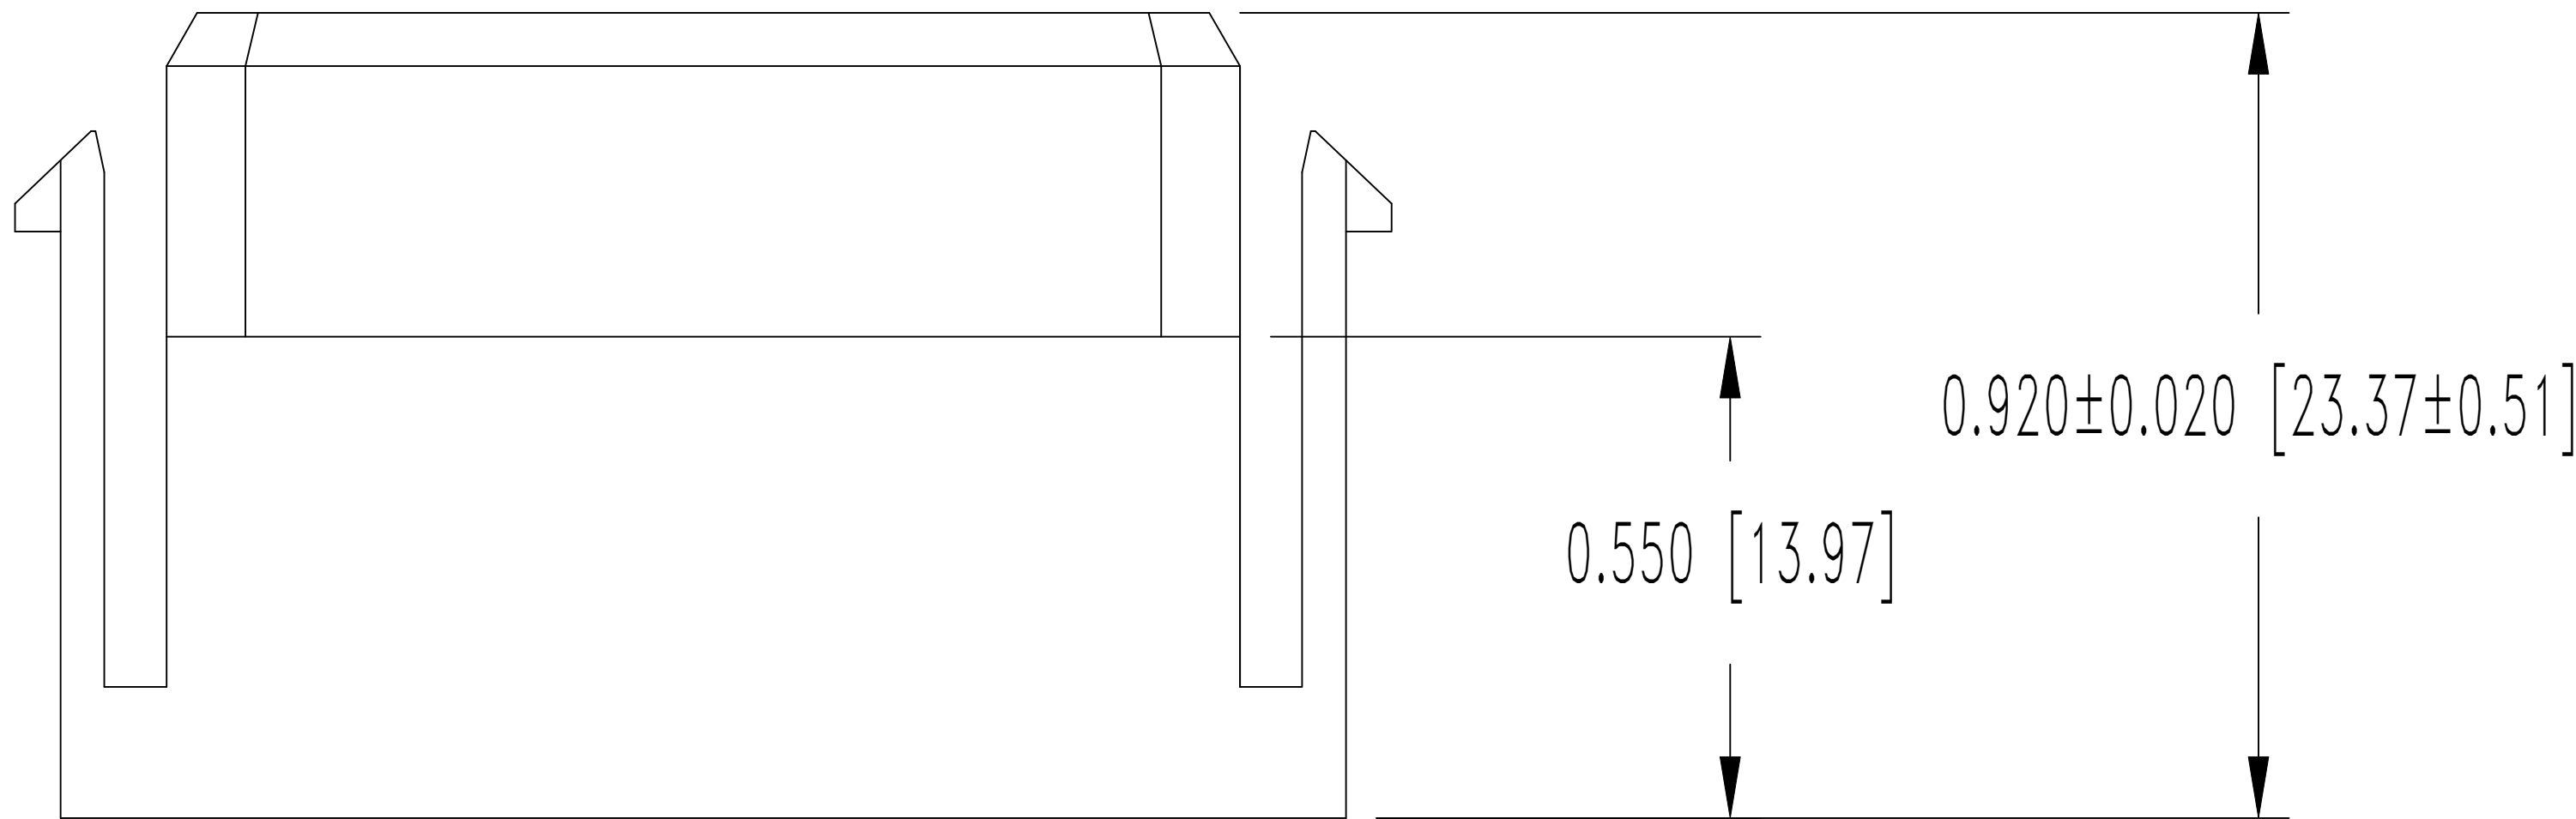
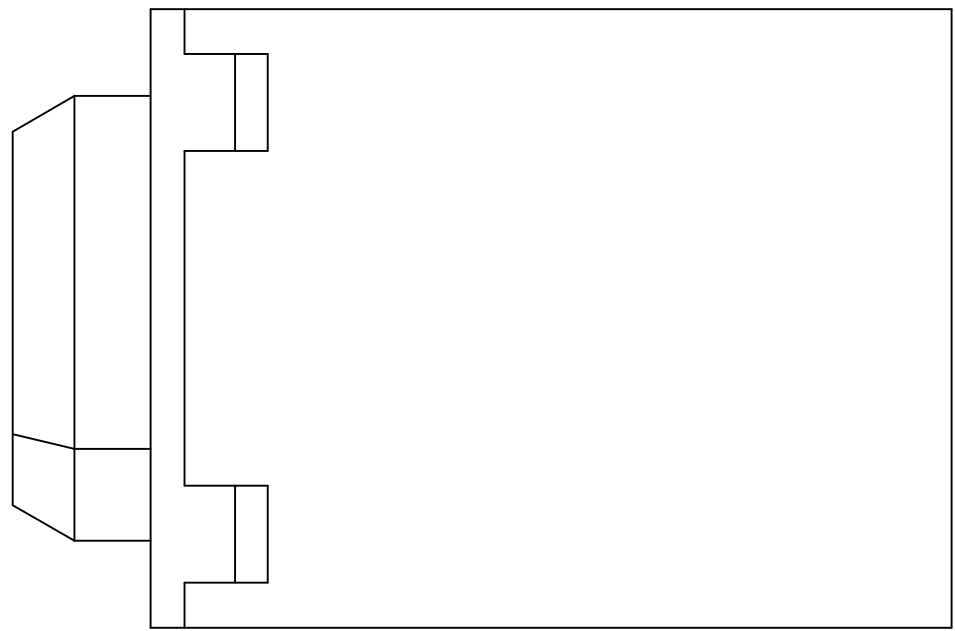


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND IT'S SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.


SK8518

| DATE | REV | REVISION RECORD | APP | DR | CK |
|------------|-----|-----------------|-----|----|----|
| 4-25 07 | NC | ECO 27823 | | YK | |

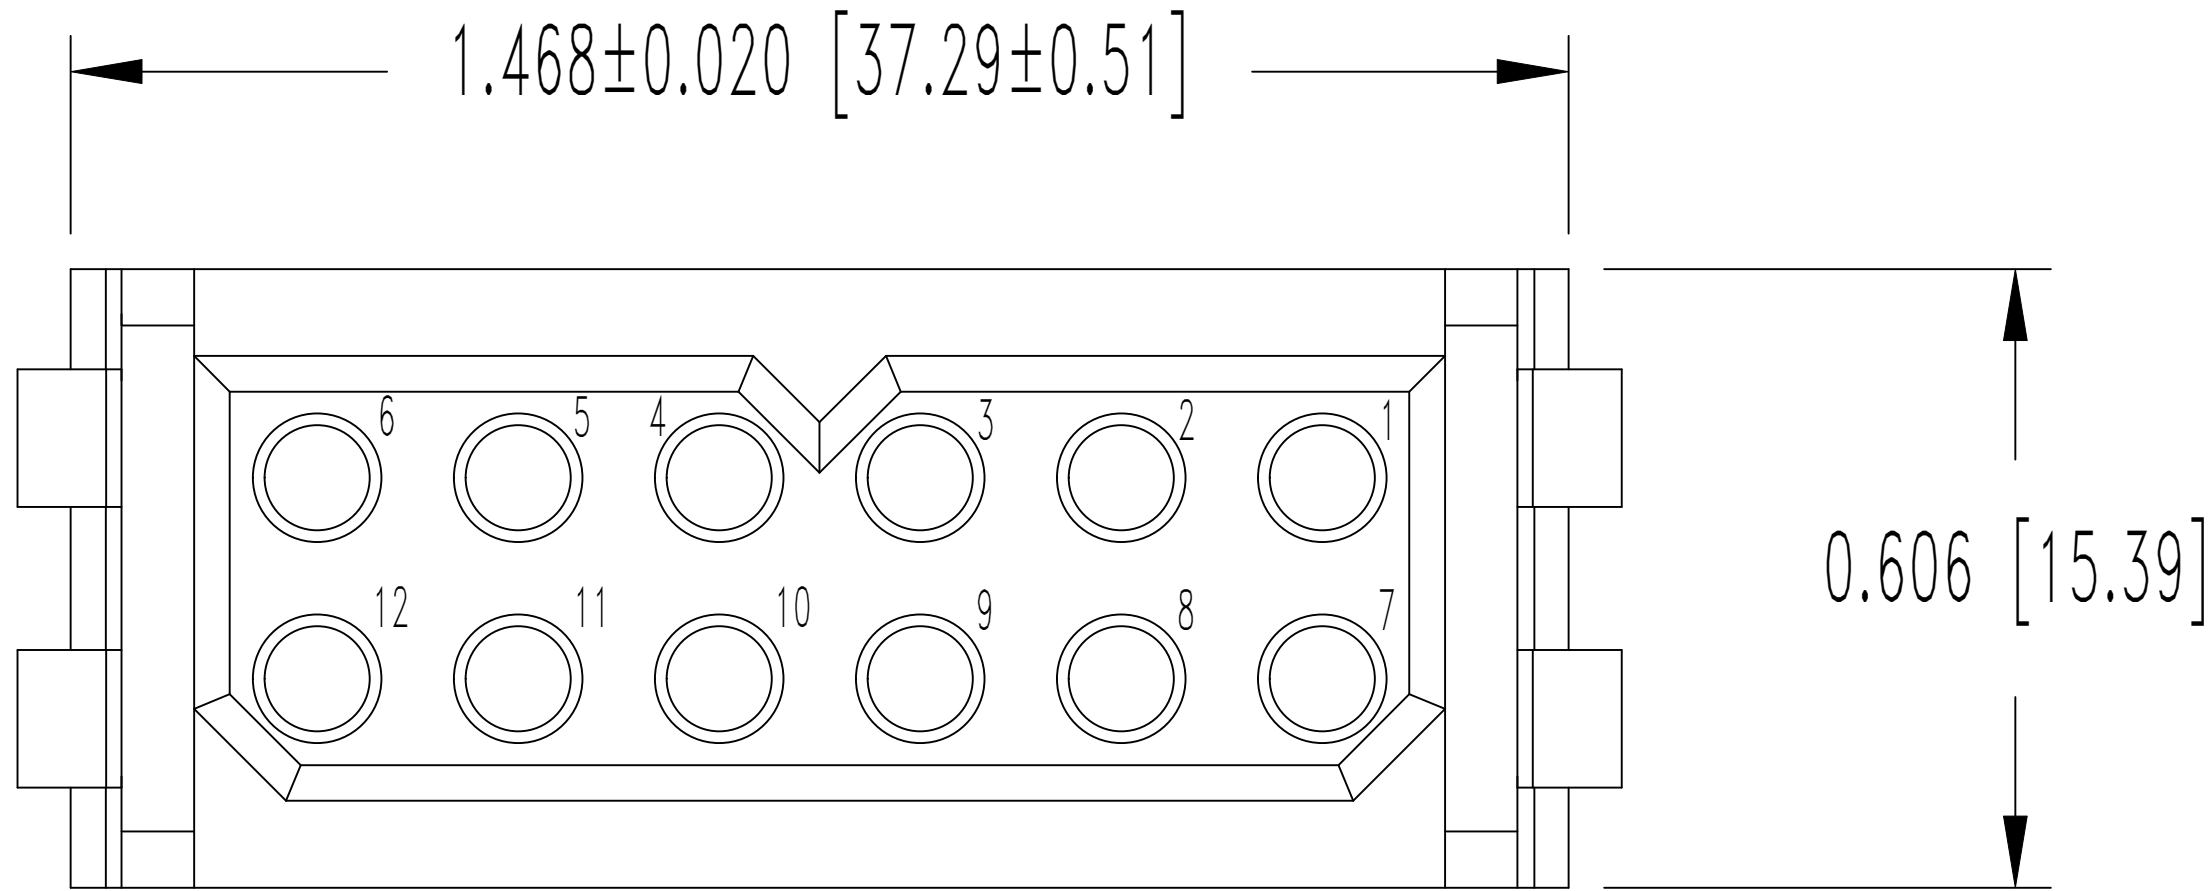


NOTES:

1. MATERIALS AND FINISHES:
INSULATOR: GLASS FILLED POLYESTER, UL 94V-0, COLOR BLUE.
2. ELECTRICAL CHARACTERISTICS:
INSULATOR RESISTANCE: 5 G OHMS PER IEC 512-2, TEST 3a, METHOD A.
3. WORKING TEMPERATURE: -55°C TO +125°C
4. CONNECTORS ARE ROHS COMPLIANT PER ROHS DIRECTIVE 2002/95/EC OF 27 JAN 2003.
5. DIMENSIONS ARE INCHES [MILLIMETERS]

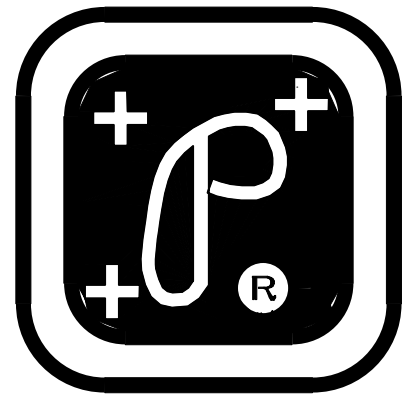

POSITRONIC
INDUSTRIES INC.
SPRINGFIELD, MISSOURI 65801

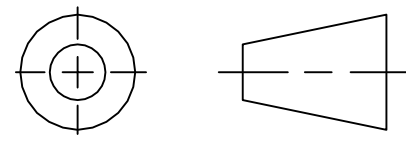

DECIMAL TOL.
± 0.015 [0.38]

ANGULAR TOL.
± 5°

PCS SERIES

TITLE

PLB12F0000/AA

DATE
4-25-07

DRAWING NUMBER
SK8518

SCALE

N.T.S.

DRAWN BY

YK

APPROVED BY

REV.

NC