


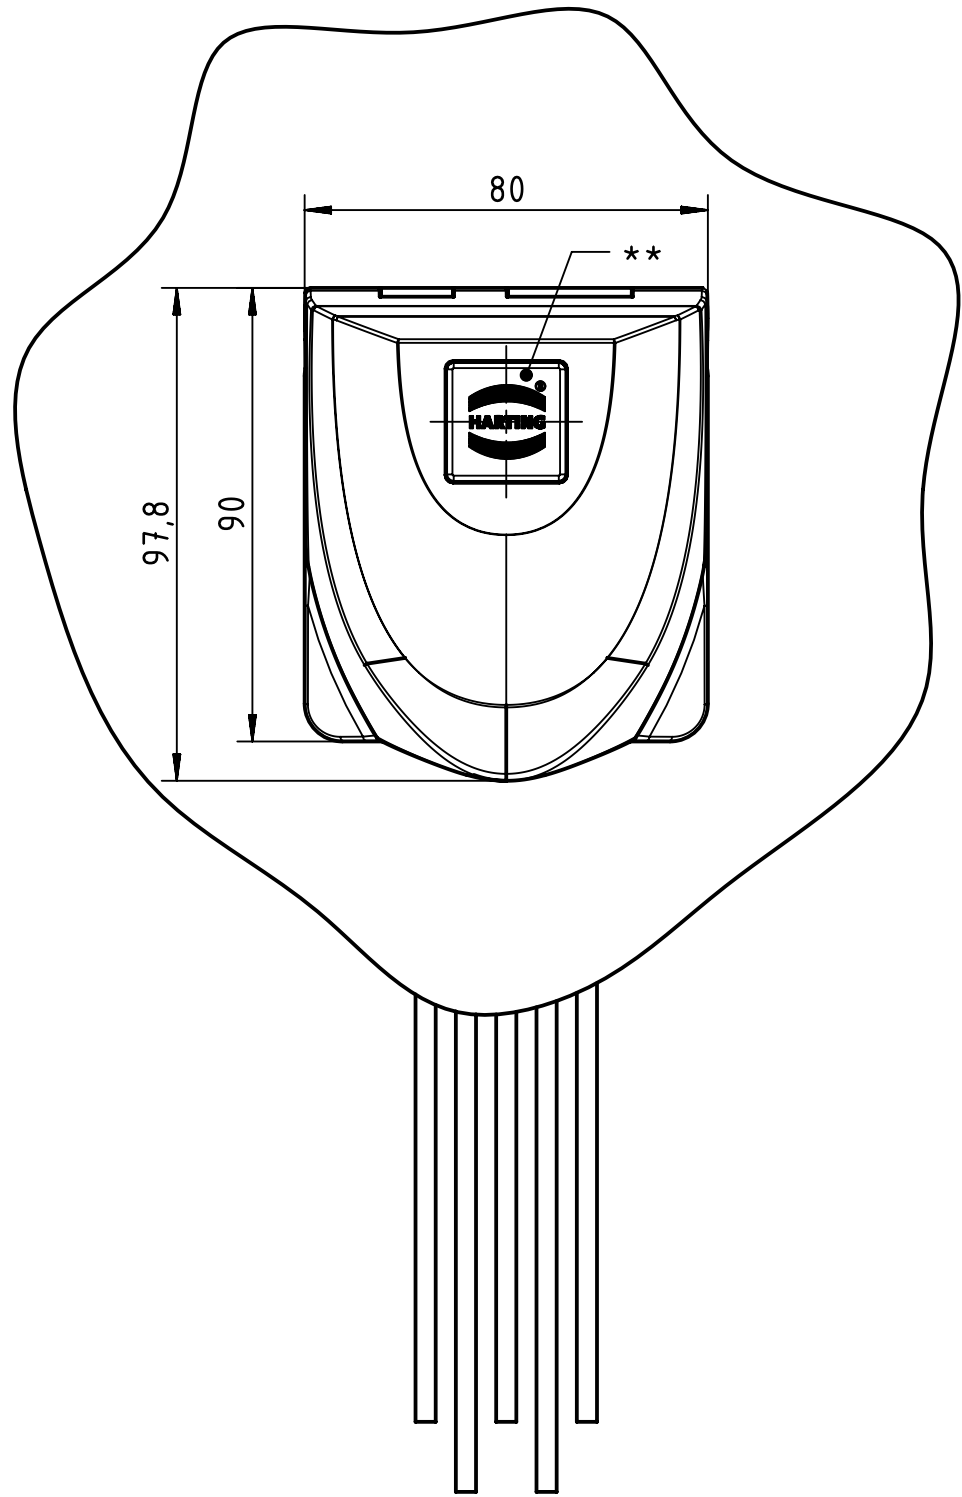
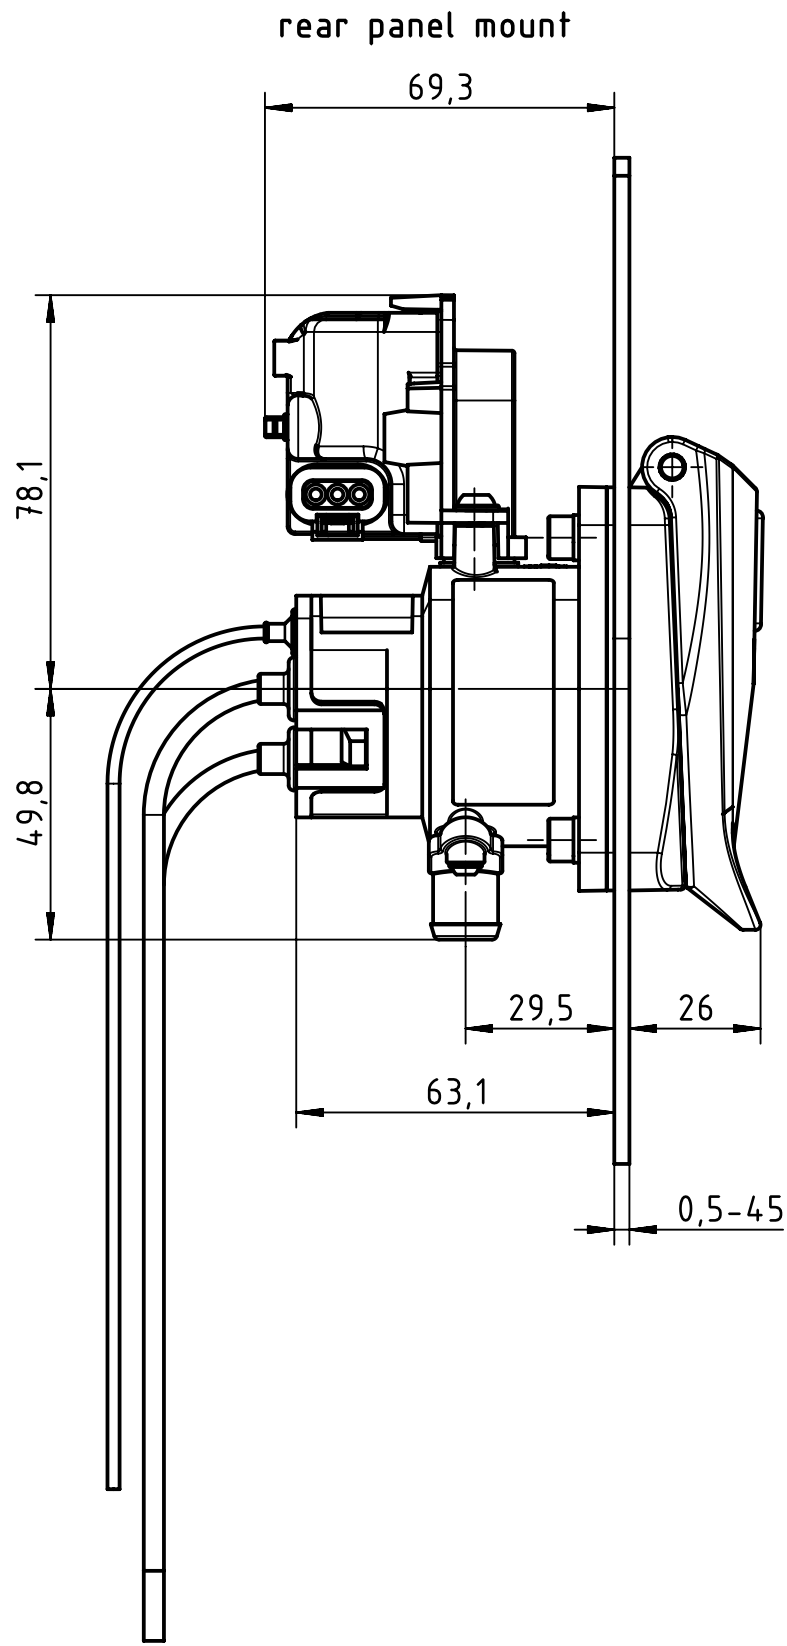


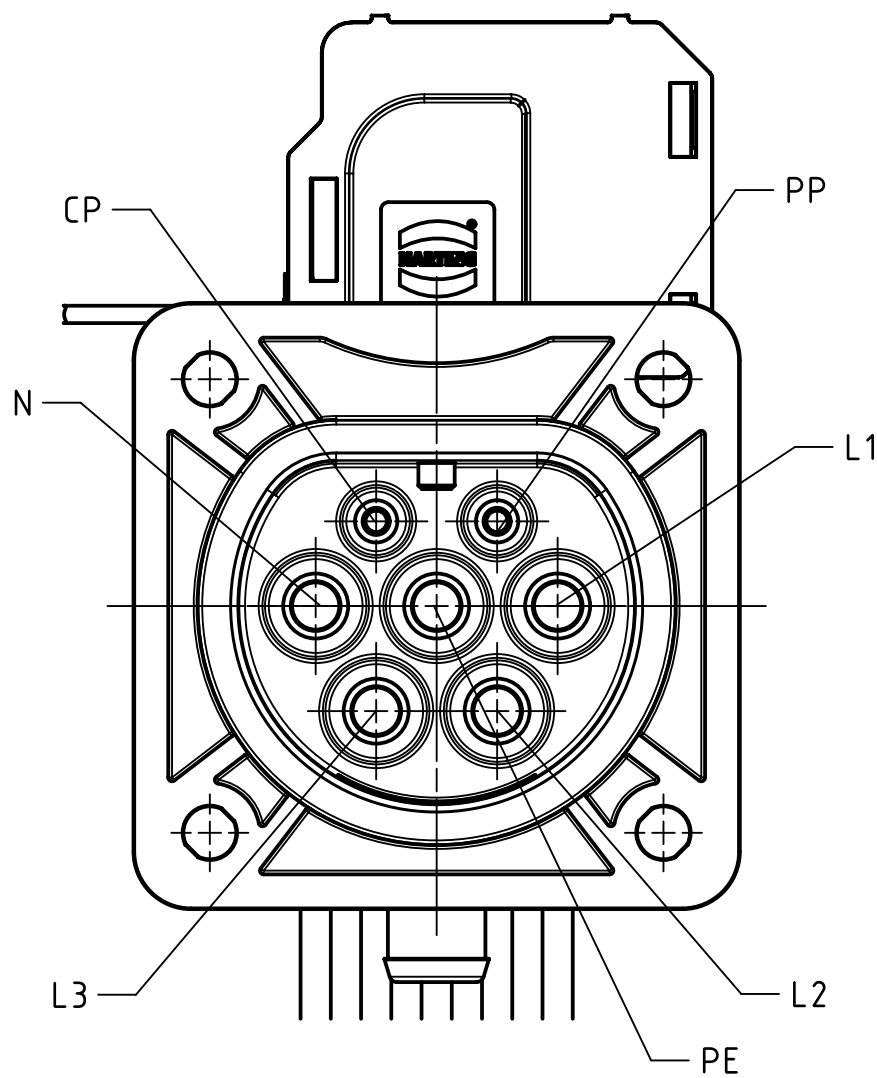

(mating face acc. to IEC 62196-1/-2)

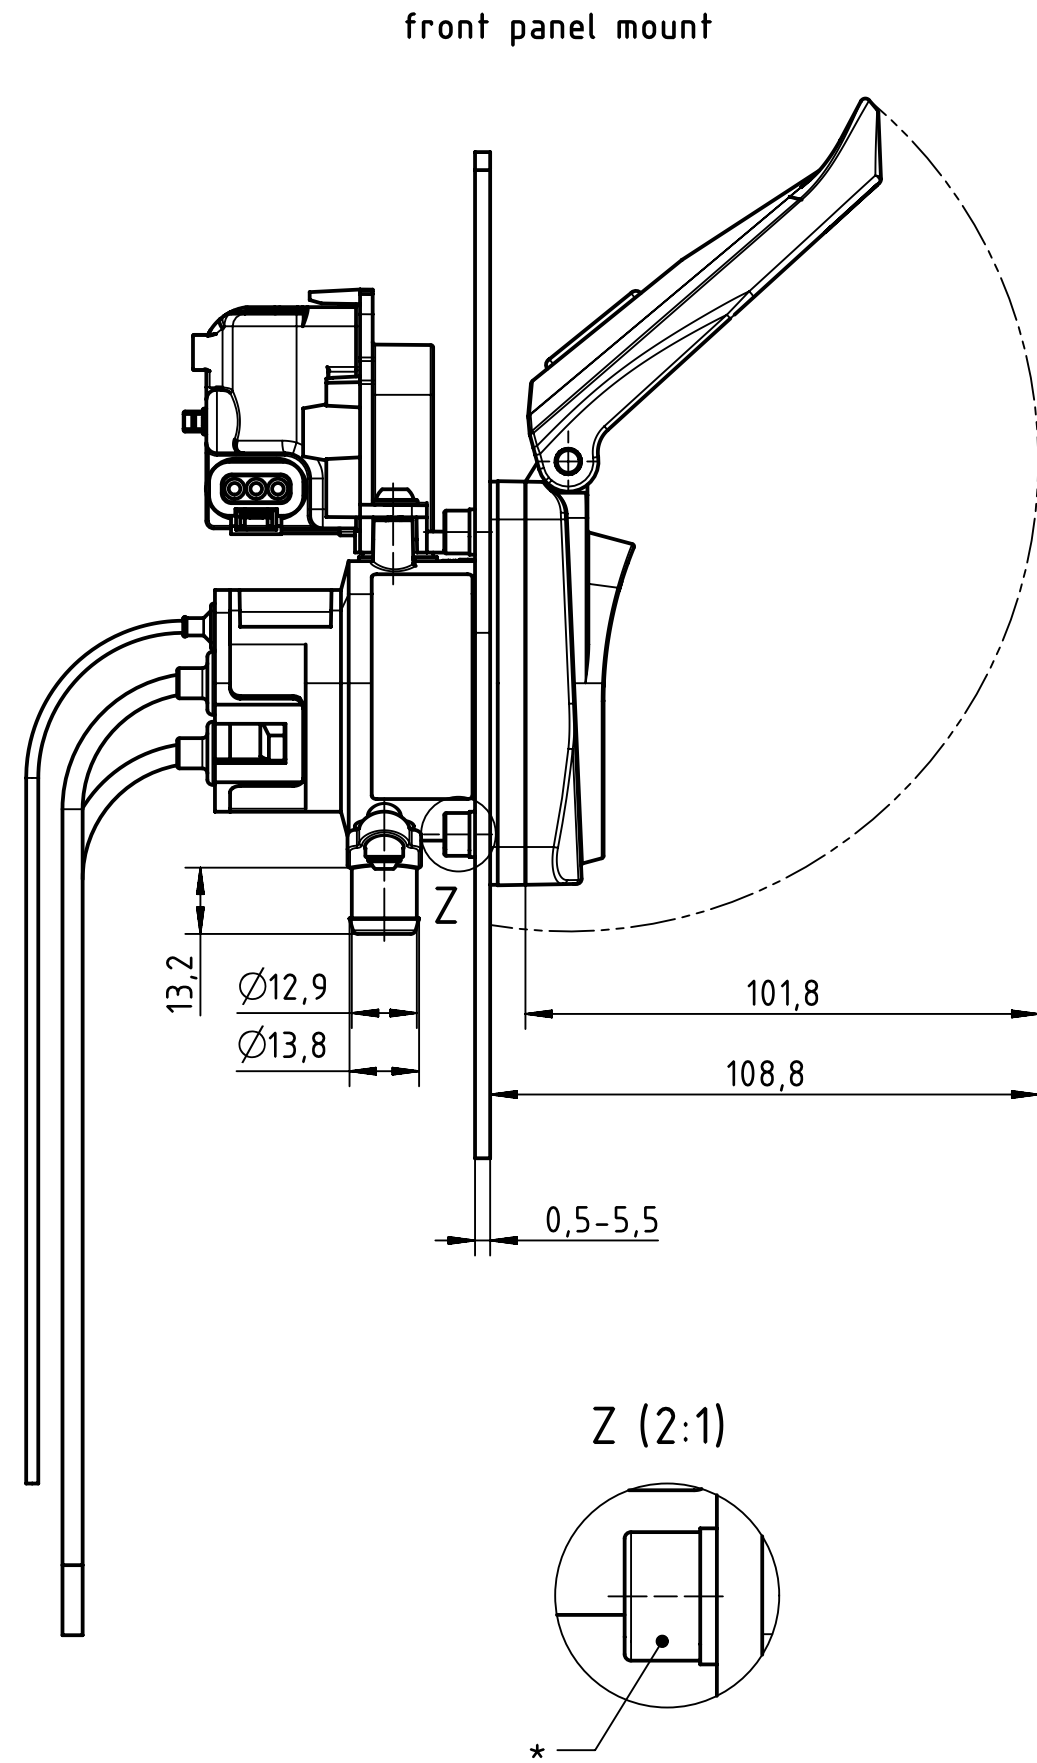

panel cutout

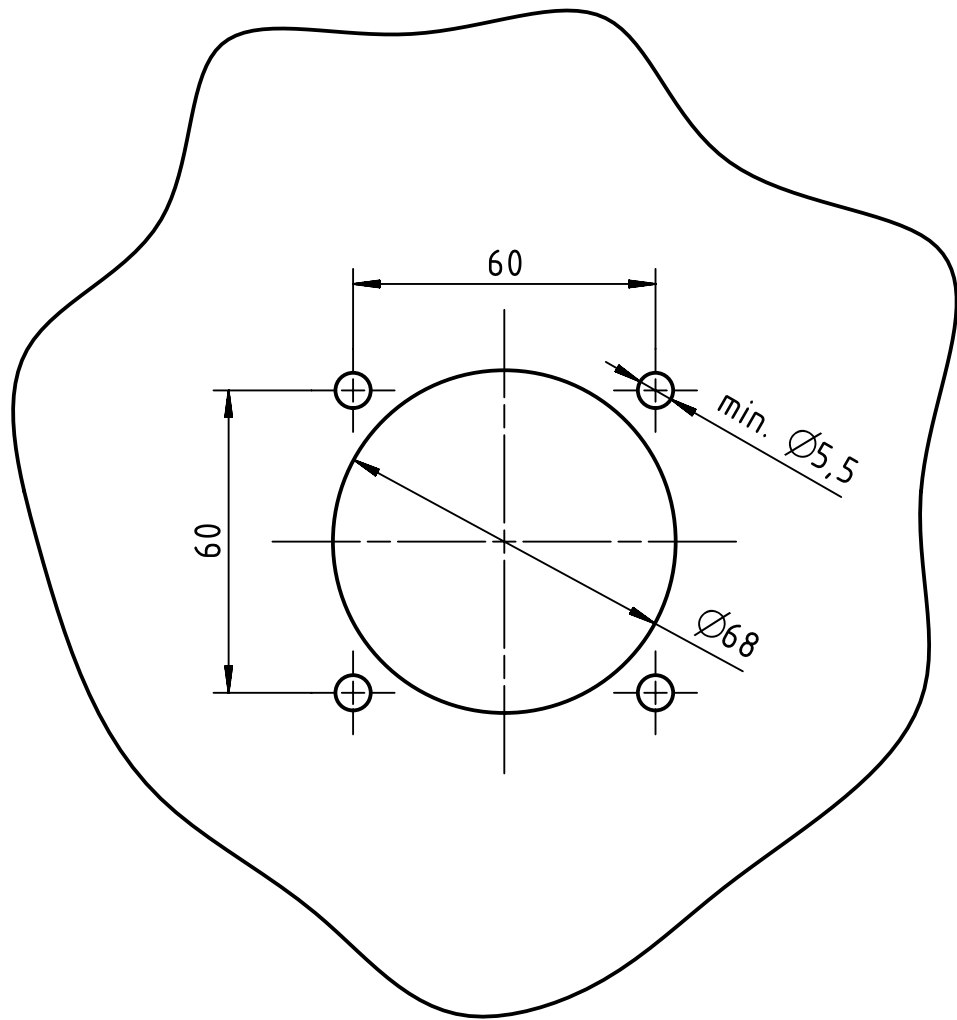

type-2 charging socket for the infrastructure side (IEC 62196-2)
charging mode 3
front / rear panel mounting

3~ 480V (AC)
max. 22KW
motorised locking
0,7m (5x6mm² + 2x0,5mm²), open cable end

* Washers and fixingscrews M5 accordingly to mounting situation
(not included in scope of delivery)

** 3D-Label position, optionally with customer branding (23,85x23,85)

HARTING-prt.no	VPE	HARTING-prt.no	VPE	Branding	
61132130371	1	61132130371XL	20	HARTING	
	All Dimensions in mm	Tech. Character:		Free size tol.	According to production drawing
	All rights reserved	Created by HILLA Hilla	Inspected by 101081 Logemann	Standardisation FISCHERJ Fischer	Date 2021-06-30
	Department HCS - DE	Title Type-2 charging socket motorised locking			State Final Release
HARTING Customised Solutions		Doc-Key / ECM-Nr. 100934056/UGD/001/A 500000198719			
D-32339 Espelkamp		Type TB	Number 100934056/001	Rev. A	Page 1/1