


P/N	Signal NO.	Power NO.	DIM"A"	DIM"B"	DIM"C"	DIM"D"	DIM"E"
-105020LF	05	02	14.85	13.80	8.70	4.00	12.21
-105040LF	05	04	20.85	19.80	14.70	4.00	18.21
-105060LF	05	06	26.80	25.80	19.70	4.00	24.21
-105080LF	05	08	32.80	31.80	25.70	4.00	29.21
-107020LF	07	02	16.85	15.80	10.70	6.00	14.21
-107040LF	07	04	22.85	21.80	16.70	6.00	20.21
-107060LF	07	06	28.85	27.80	22.70	6.00	26.21
-107080LF	07	08	34.85	33.80	28.70	6.00	32.21
-109020LF	09	02	18.85	17.80	12.70	8.00	16.21
-109040LF	09	04	24.85	23.80	18.70	8.00	22.21
-109060LF	09	06	30.85	29.80	24.70	8.00	28.21
-109080LF	09	08	36.85	35.80	30.70	8.00	34.21
-111020LF	11	02	20.85	19.80	14.70	10.00	18.21
-111040LF	11	04	26.85	25.80	20.70	10.00	24.21
-111060LF	11	06	32.85	31.80	26.70	10.00	30.21
-111080LF	11	08	38.85	37.80	32.70	10.00	36.21
-113020LF	13	02	22.85	21.80	16.70	12.00	20.21
-113040LF	13	04	28.85	27.80	22.70	12.00	26.21
-113060LF	13	06	34.80	33.80	28.70	12.00	32.21
-113080LF	13	08	40.80	39.80	34.70	12.00	38.21
-115020LF	15	02	24.85	23.80	18.70	14.00	22.21
-115040LF	15	04	30.85	29.80	24.70	14.00	28.21
-115060LF	15	06	36.85	35.80	30.70	14.00	34.21
-115080LF	15	08	42.85	41.80	36.70	14.00	40.21
-117020LF	17	02	26.85	25.80	20.70	16.00	24.21
-117040LF	17	04	32.85	31.80	26.70	16.00	30.21
-117060LF	17	06	38.85	37.80	32.70	16.00	36.21
-117080LF	17	08	44.85	43.80	38.70	16.00	42.21
-119020LF	19	02	28.85	27.80	22.70	18.00	26.21
-119040LF	19	04	34.85	33.80	28.70	18.00	32.21
-119060LF	19	06	40.85	39.80	34.70	18.00	38.21
-119080LF	19	08	46.85	45.80	40.70	18.00	44.21

NOTES:

- MATERIAL:  
HIGH TEMPERATURE THERMOPLASTIC, COLOR NATURAL  
UL94 V-0
- RoHS COMPATIBLE PRODUCT SPECIFICATIONS  
a - LABELLING :  
MEETS PACKAGING SPECS AS PER GS-14-2813;  
b - LEGAL STATEMENT :  
SEE GS-47-0004.
- TO USE WITH AICC TERMINAL:  
10162696 SERIES FOR SIGNAL  
10162697 SERIES FOR POWER
- TO BE MATED WITH AICC 10162688 & 10162689 SERIES
- PRODUCT SPEC.:GS-12-1702;
- APPLICATION SPEC.:GS-20-0703;
- THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO ANY SOLDER PROCESS.

8. PRODUCT DESCRIPTION CODE :

10162695-1 XX XX 0 LF

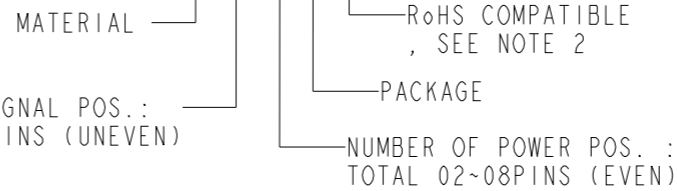

NUMBER OF SIGNAL POS.:  
TOTAL 05~19PINS (UNEVEN)

NUMBER OF POWER POS.:  
TOTAL 02~08PINS (EVEN)

spec ref	GS-12-1702	dr	Arthur Zhao	2021/09/27	projection	mm	size	A3	scale	N/A	
tolerance std	ISO 406 ISO 1101	eng	Arthur Zhao	2021/09/27			ecn no	-	rel level	Released	
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	-	-							
surface	linear	appr	Tim Yao	2021/09/27	product family	Receptacle Housing		10162695		rev	A
	angular				ComboLock Connector		10162695				
ISO 1302	0.X ±0.3 0.XX ±0.2 0.XXX ±0.05 0° ±2°	Amphenol FCi		cat. no.	Product - Customer Drw		sheet 1 of 1				