


Nov.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

1		2			3			4		
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	
△				..	△				..	
△					△				..	
△					△				..	

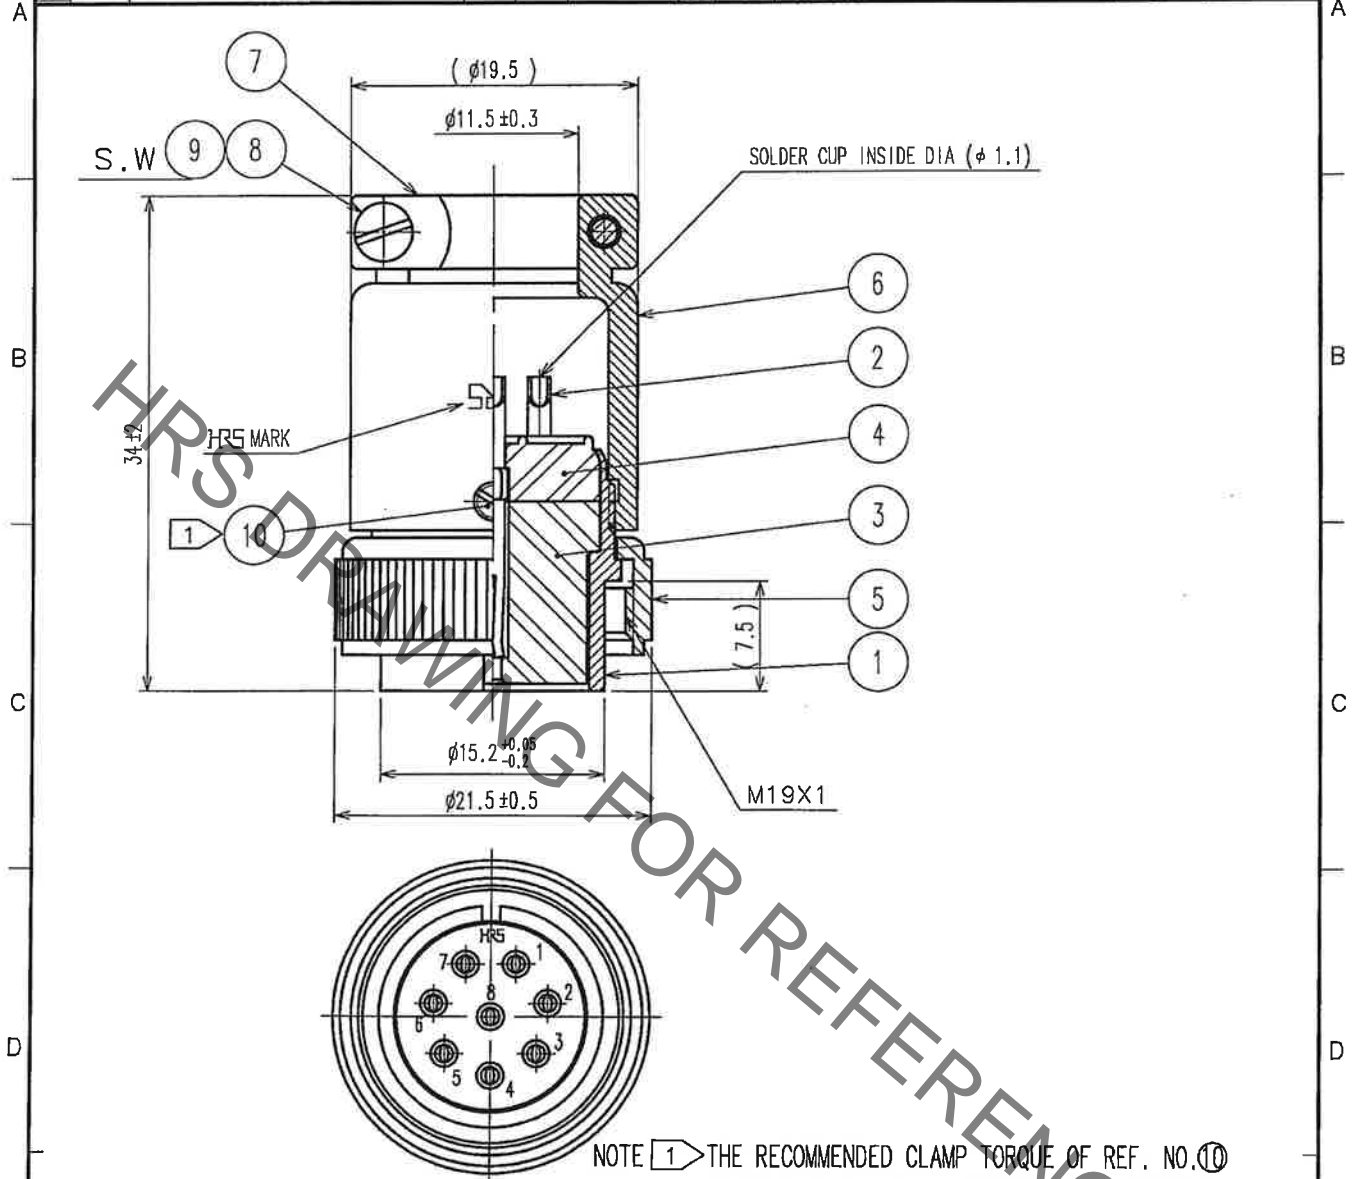

NOTE ① THE RECOMMENDED CLAMP TORQUE OF REF. NO.⑩ TO BE 0.2~0.3 N·m. LOCTITE 242, LOCTITE JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT REF. NO.⑩ FROM LOOSENING.
2 ROTATION EXAMPLES OF REF. NO.① AND ⑥ ARE SHOWN.

5	BRASS	NICKEL PLATING	10	BRASS	NICKEL PLATING
4	DIALLYL PHTHALATE	(BLACK) UL94V-0	9	PHOSPHOR BRONZE	NICKEL PLATING
3	DIALLYL PHTHALATE	(BLACK) UL94V-0	8	BRASS	NICKEL PLATING
2	COPPER ALLOY	SILVER PLATING 5μm min.	7	BRASS	NICKEL PLATING
1	BRASS	NICKEL PLATING	6	BRASS	NICKEL PLATING
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
		J. Suzuki	J. Suzuki	J. Kobayashi	J. Komatsu	
		21.06.03	21.06.03	31.06.07	21.06.09	
DRAWING NO. EDC4-003125-76-00			PART NO. RM15TP-8S(76)			
SACLE 2 : 1			CODE NO. CL109-0053-2-76			
UNITS mm			HRS HIROSE ELECTRIC CO.,LTD.			

TO
R

