


1					2					3					4				
COUNT	DESCRIPTION OF REVISIONS				BY	CHKD	DATE			COUNT	DESCRIPTION OF REVISIONS				BY	CHKD	DATE		
△										△									
△										△									
△										△									

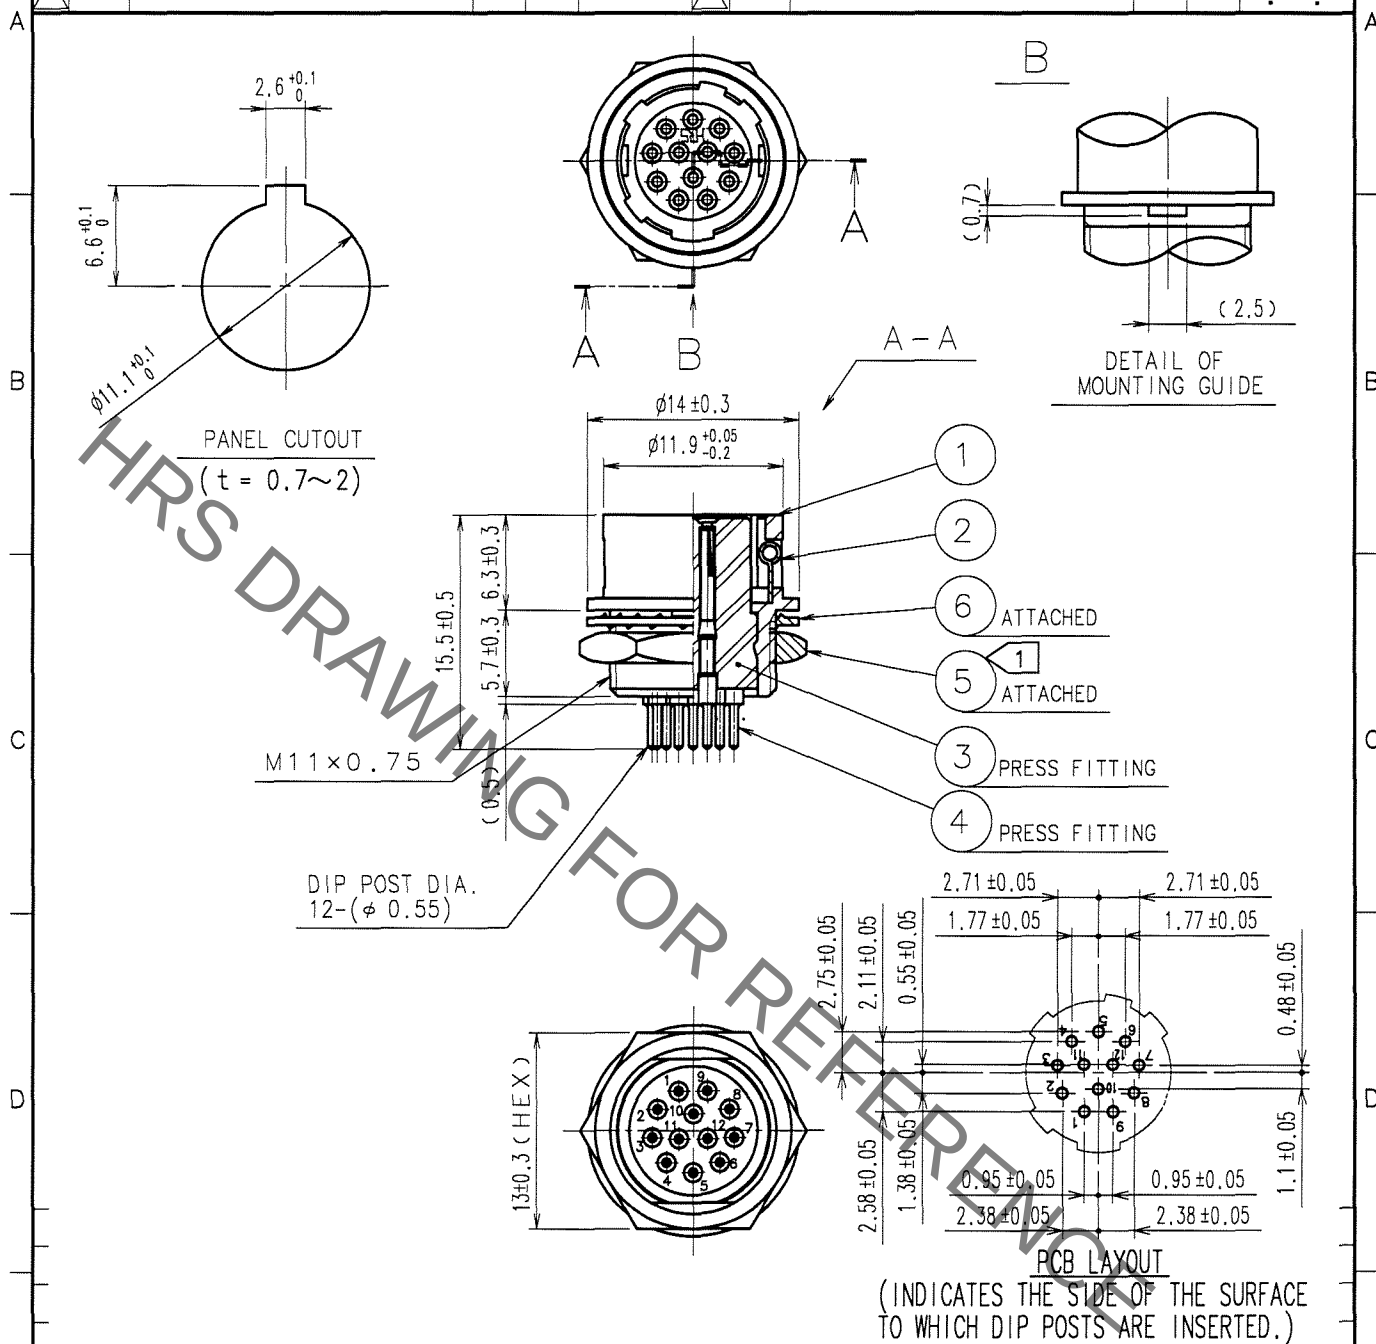

NOTE ① THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑤ TO BE 1.5 N·m.
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO
PREVENT REF. NO. ⑤ FROM LOOSENING.

3	POLYAMIDE	(BLACK) UL94V-0	6	PHOSPHOR BRONZE	NICKEL PLATING
2	STAINLESS STEEL		5	BRASS	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	4	BERYLLIUM COPPER	GOLD PLATING 0.2 μ m min. NICKEL UNDER PLATING 2 μ m min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL		DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
		D. Matsume	D. Matsume	E. Kunii	M. Sato	
		05.11.14	05.11.14	05.11.14	05.11.15	
DRAWING NO. EDC4-009047-73		PART NO. HR10-10R-12SA(73)				
SCALE 2 : 1		CODE NO. CL110-0049-5-73				1
UNITS mm						1

HRS

HIROSE ELECTRIC CO., LTD.