


1			2			3			4		
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS
△					△						
△					△						
△					△						

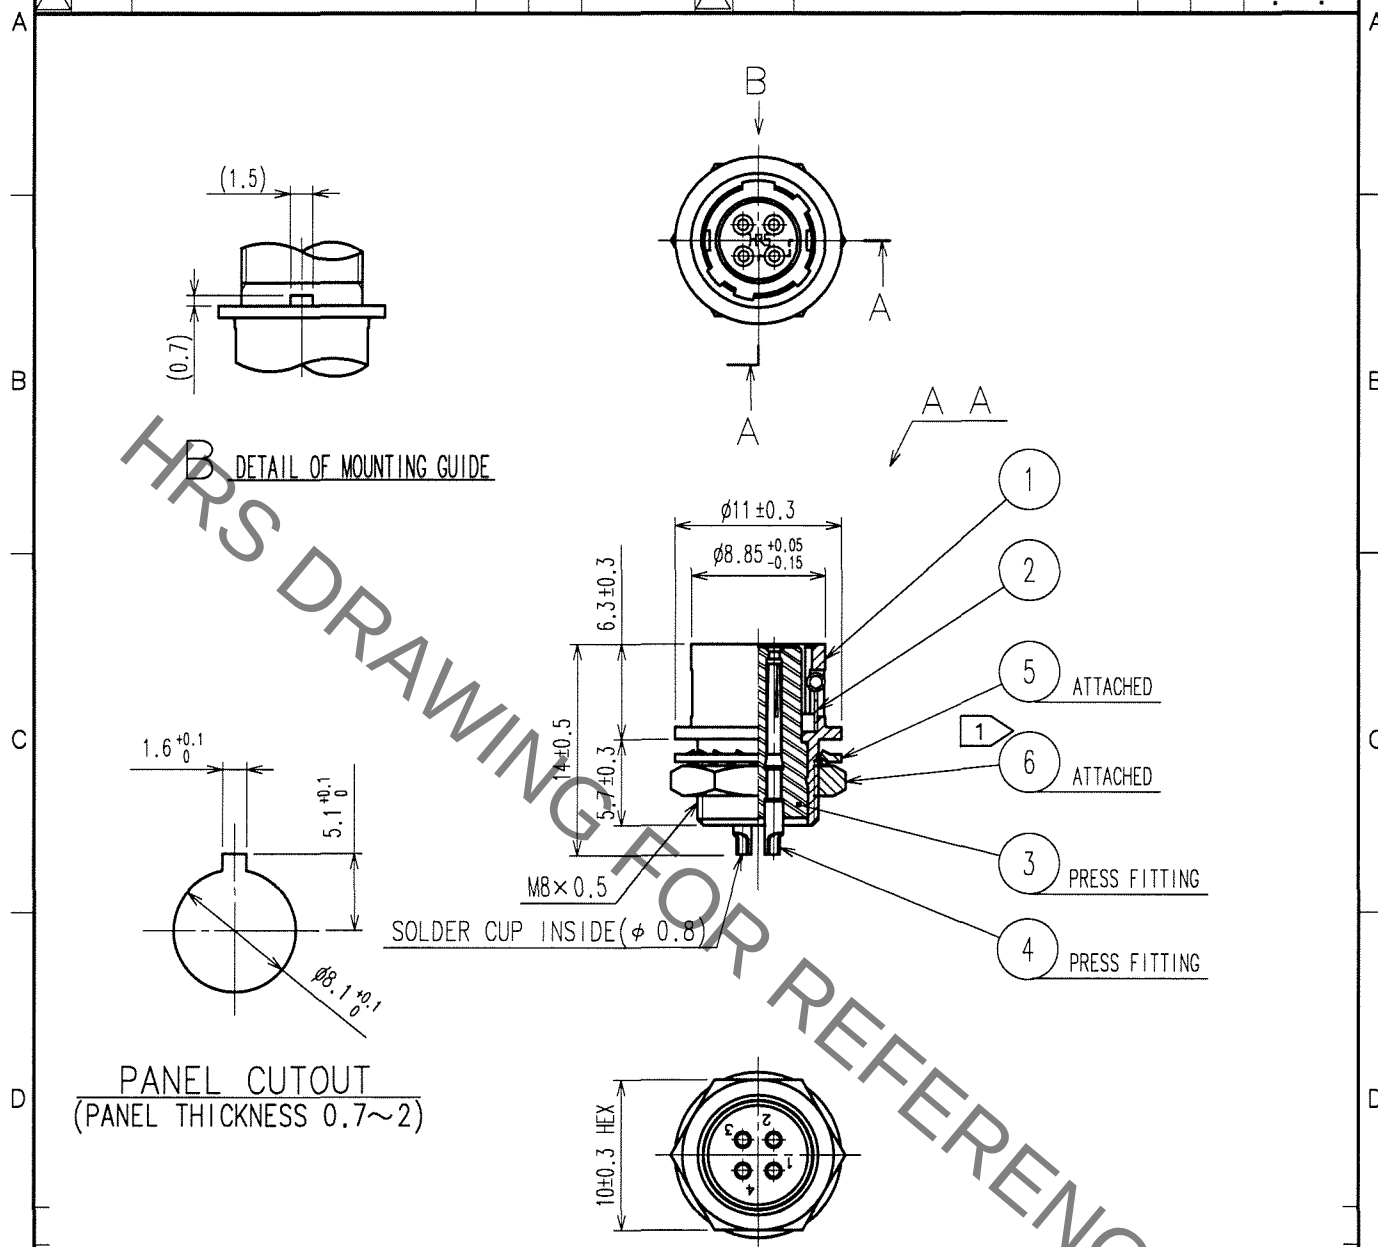

NOTE: 1 THE RECOMMENDED CLAMP TORQUE OF REF.NO.⑥: 1.5N·m.
LOCTITE 242, LOCTITE OR EQUIVALENT IS RECOMMENDED TO
PREVENT REF.NO.⑥ FROM LOOSENING.

3	POLYAMIDE	(BLUE)	6	BRASS	NICKEL PLATING
2	STAINLESS STEEL		5	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	4	BERYLLIUM COPPER	CONTACT AREA GOLD 0.2μm min. UNDER PLATING NICKEL 2μm min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL	H.Kishi	H.Kishi	E.Kurui	M.Sato	
	05.06.13	05.06.13	05.06.13	05.6.14	

SCALE	DRAWING NO.	PART NO.
2 : 1	EDC4-007766-73	HR10-7R-4S(73)
UNITS	CODE NO.	
mm	CL110-0031-0-73	1/1

HRS

HIROSE ELECTRIC CO., LTD.