
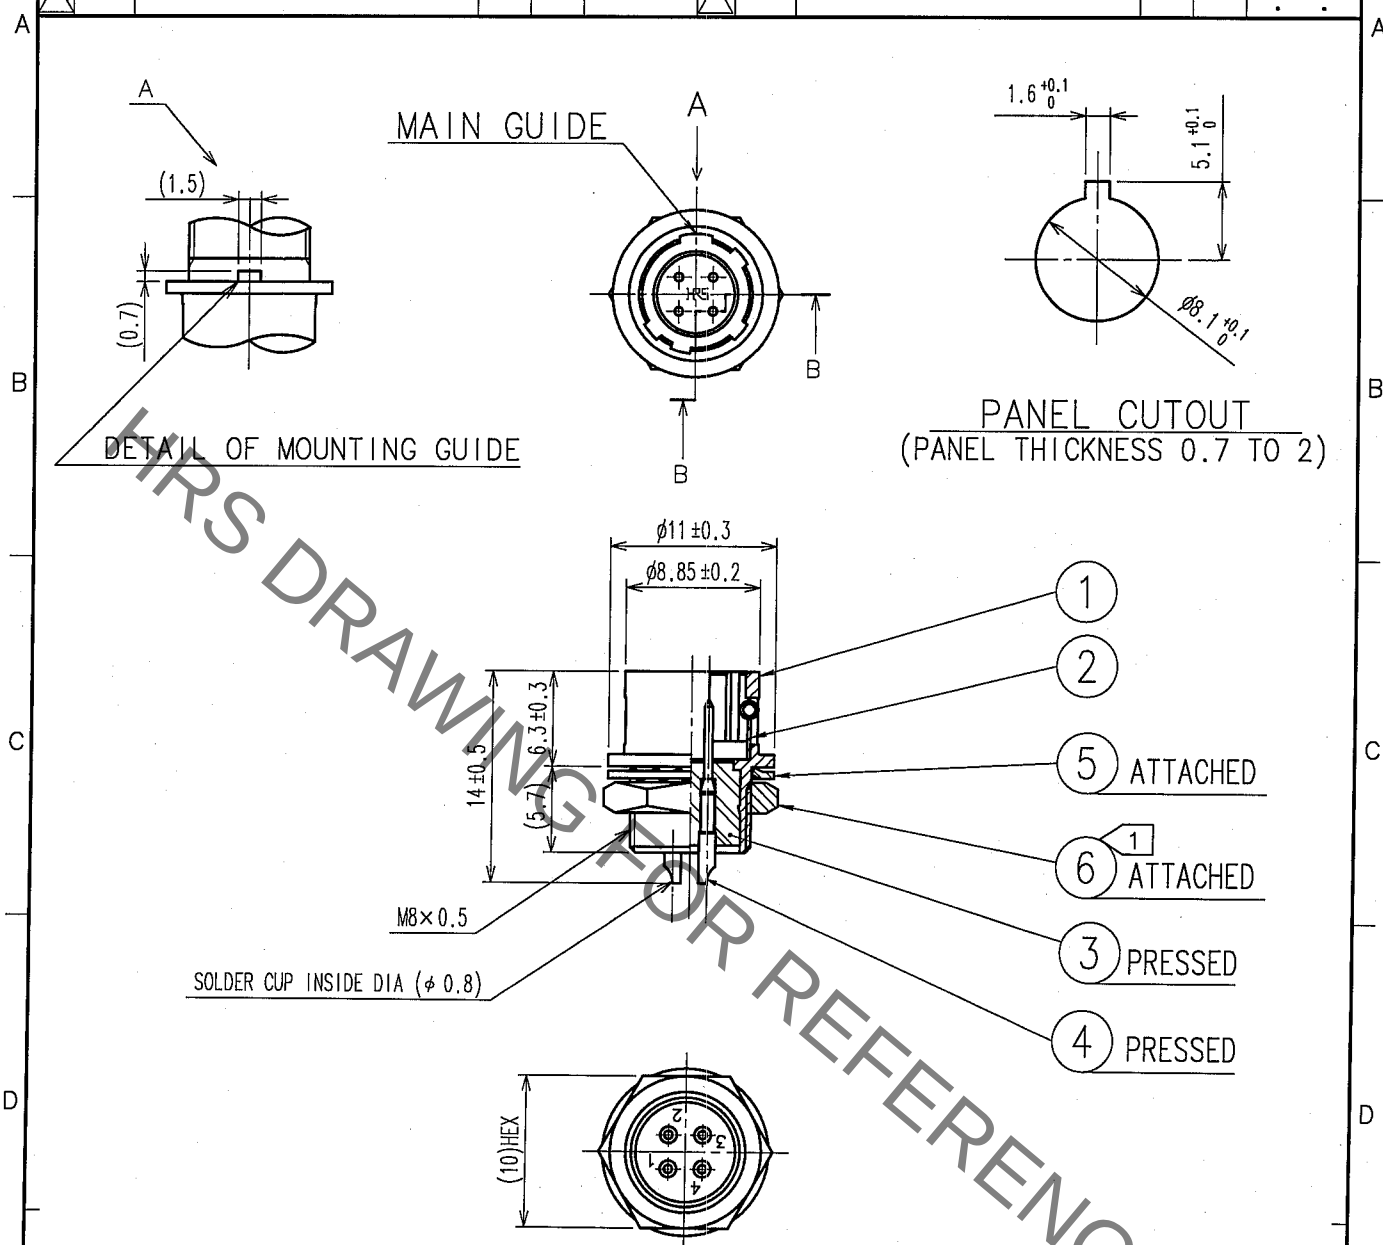


	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					.	△					.
△						△					.
△						△					.



NOTE: ① THE RECOMMENDED CLAMP TORQUE OF REF.NO. ⑥ : 1.5 N · m
LOCTITE 242, LOCTITE OR EQUIVALENT IS RECOMMENDED TO
PREVENT REF.NO. ⑥ FROM LOOSENING.

3	POLYAMIDE	(BLACK) UL94V-0	6	BRASS	NICKEL PLATING	
2	STAINLESS STEEL		5	PHOSPHOR BRONZE	NICKEL PLATING	
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	4	BRASS	SILVER PLATING 2μ m min	
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS	
CODE NO. (OLD) CL		DRAWN T. HORII 05.12.9	DESIGNED T. Nagano 05.12.09	CHECKED E. Kunita 05.12.09	APPROVED M. Sato 05.12.10	RELEASED
		DRAWING NO. EDC4-020539-73		PART NO. HR10A-7R-4P (73)		
SACLE 2 : 1		 HIROSE ELECTRIC CO., LTD.		CODE NO. CL110-0306-6-73		1/1
UNITS mm						