


Feb.1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

1					2					3					4				
COUNT	DESCRIPTION OF REVISIONS				BY	CHKD	DATE			COUNT	DESCRIPTION OF REVISIONS				BY	CHKD	DATE		
△							..			△							..		
△										△							..		
△										△							..		

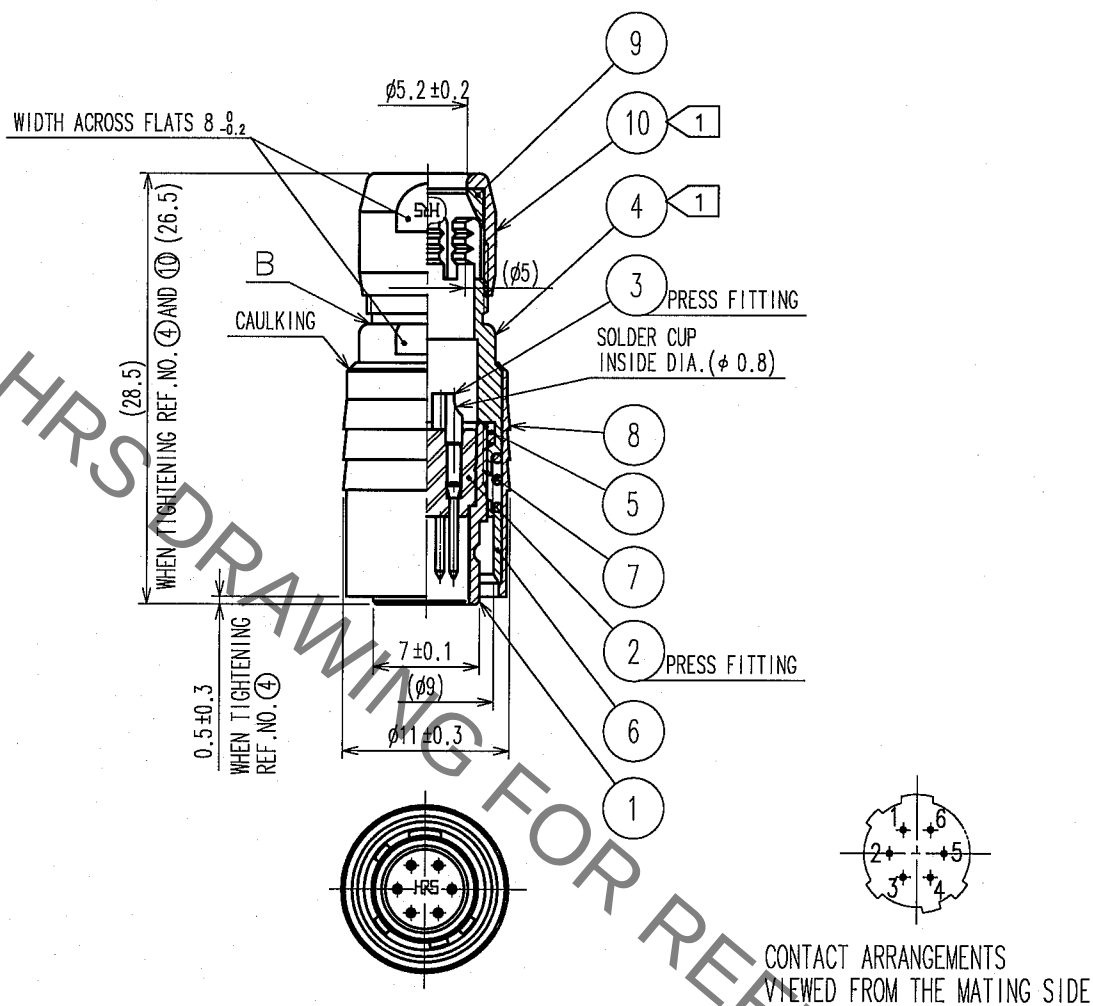

NOTE 1 THE RECOMMENDED CLAMP TORQUE, REF. NO. ④ AND ⑩ : 1.5 N·m
REF. NO. ⑩ SHALL BE TIGHTENED BY TORQUE AFTER
CLAMPED UNTIL IT TOUCHES THE SURFACE B.
2 ONE EXAMPLE OF THE ROTATION OF REF. NO. ①, ④ AND ⑩ IS SHOWN.

5	POLYAMIDE		10	BRASS	MATTE FINISH NICKEL PLATING
4	BRASS	MATTE FINISH NICKEL PLATING	9	POLYAMIDE	
3	BRASS	GOLD PLATING 0.2μ m min. NICKEL UNDER PLATING 2μ m min.	8	BRASS	MATTE FINISH NICKEL PLATING
2	POLYAMIDE	(BLUE)	7	STEEL	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATING	6	STAINLESS STEEL	
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL		DRAWN D. Matsume 05.09.01	DESIGNED D. Matsume 05.09.01	CHECKED H. Kishi 05.09.01	APPROVED M. Sato 05.09.02	RELEASED
DRAWING NO. EDC4-007758-73		PART NO. HR10-7P-6P(73)				
SACLE 2 : 1		CODE NO. CL110-0023-1-73				1 1
UNITS mm		HRS HIROSE ELECTRIC CO., LTD.				