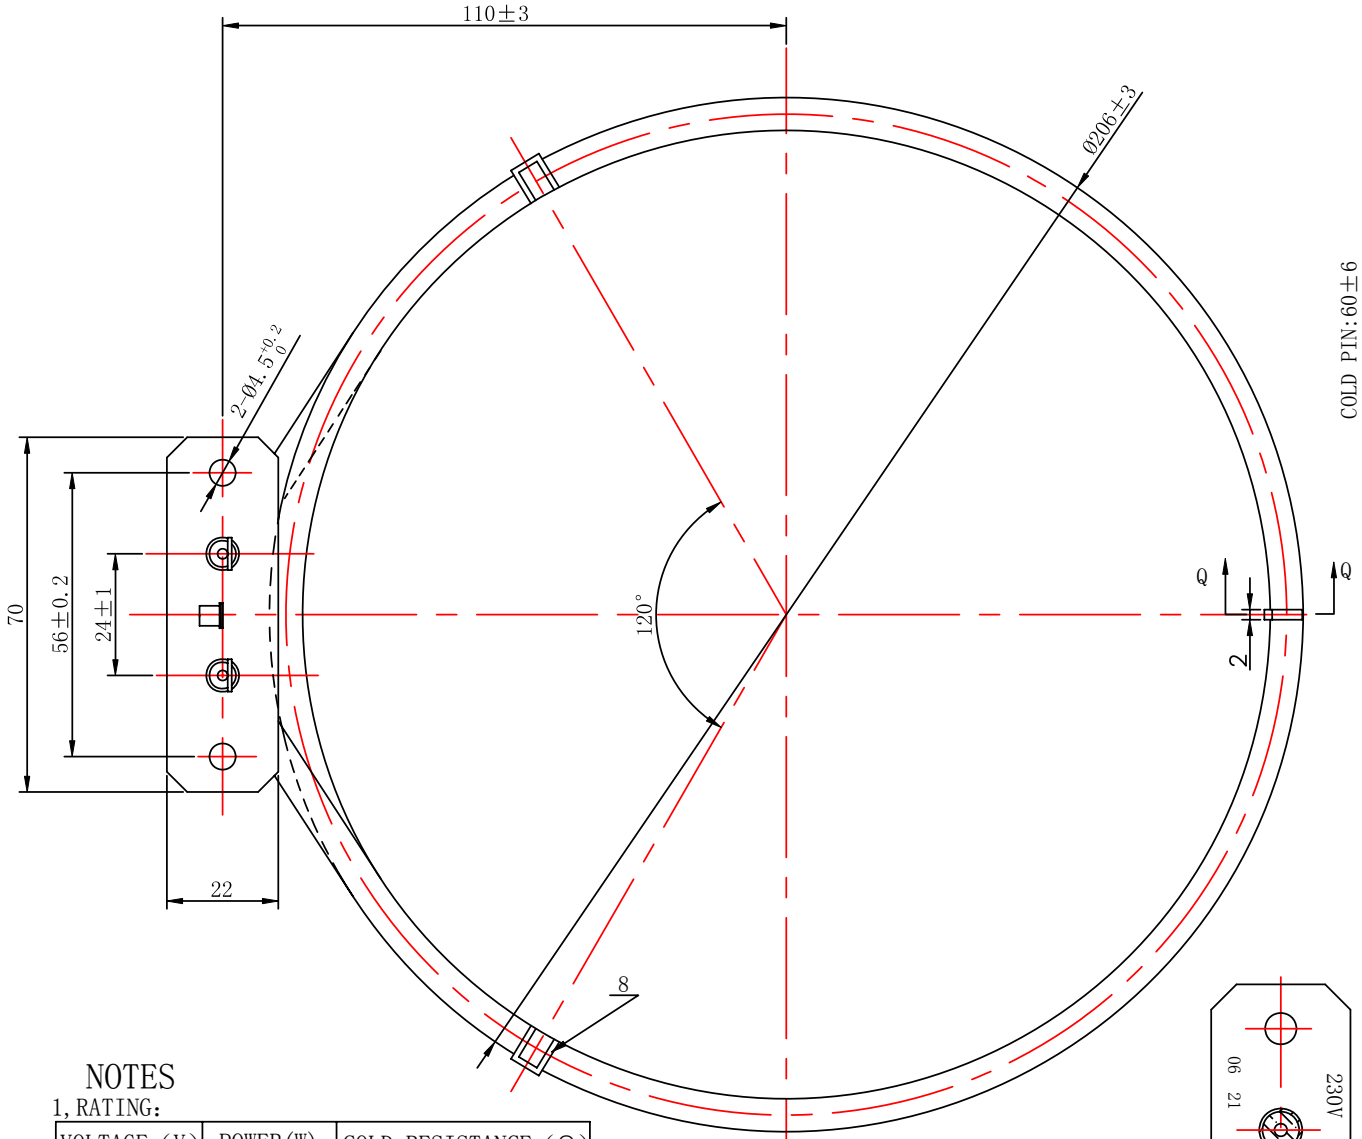

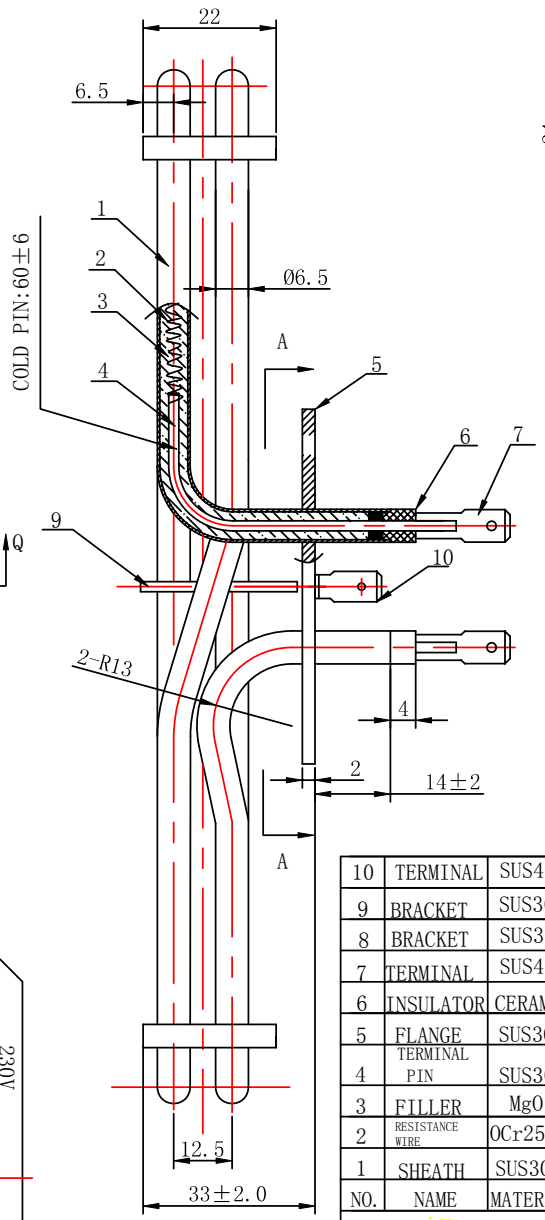

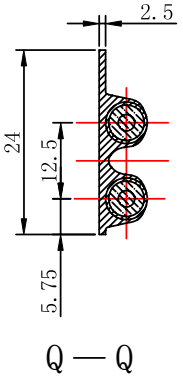

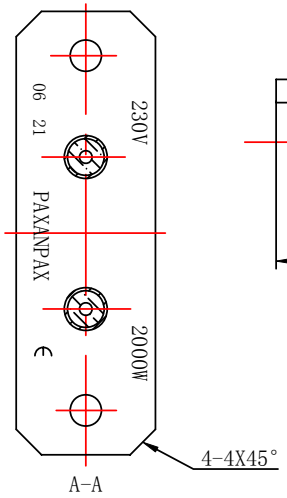

NOTES

1, RATING:

VOLTAGE (V)	POWER(W)	COLD RESISTANCE (Ω)
230V	2000+5-10%	

2, SHEATH:SUS304
3, Hi-POT TEST:1500V1S MIN COLD CONDITION, CUT OFF CURRENT:0.75mA.
4, INSULATION RESISTANCE:10MΩ MIN COLD CONDITION.
5, LEAKAGE CURRENT TO BE 0.5mA.MAX. WHILE ENERGIZED AT RATED VOLTAGE.
6, PROCESS:IN AIR.

NO.	NAME	MATERIAL	CODE	REMARK	QTY.
10	TERMINAL	SUS430			1
9	BRACKET	SUS304			1
8	BRACKET	SUS304			2
7	TERMINAL	SUS430		6.35*0.8*20	2
6	INSULATOR	CERAMIC			2
5	FLANGE	SUS304			1
4	TERMINAL PIN	SUS304			2
3	FILLER	MgO			
2	RESISTANCE WIRE	OCr25A15			
1	SHEATH	SUS304			1

DESIGNED	NI NAN	20130514
TECH		
CHECKED		
APPROVED		

TITLE: ELECTRIC HEATER

MODEL:

DWG NO.

UNIT	SCALE	REV.
mm		A1