
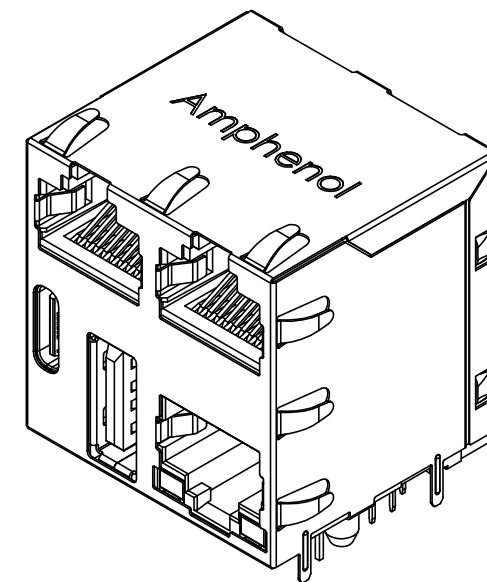
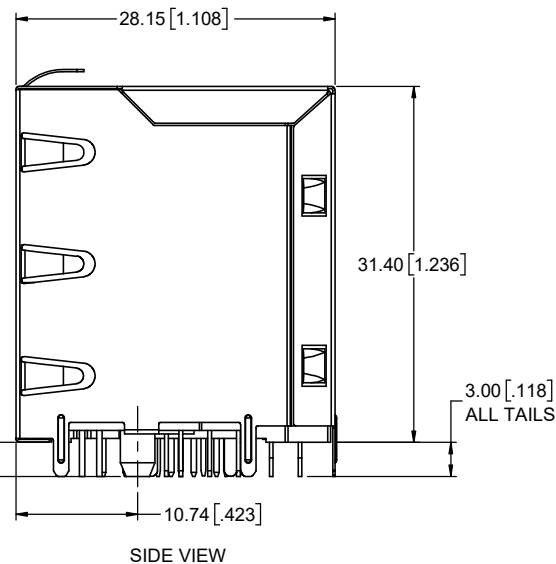


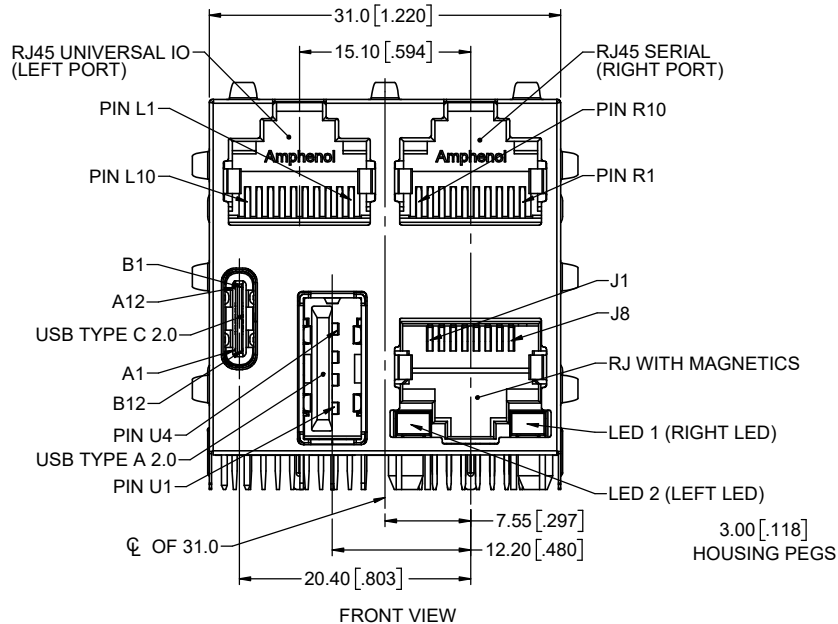


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	INITIAL RELEASE	JUL25/23	KELVIN

NOTES:

- MATERIALS:**
CONTACTS: COPPER ALLOY
 PLATING: RJ45 & USB TYPE A 2.0 CONNECTORS: SELECTIVE GOLD PLATING ON MATING SURFACES SEE PART NO. FOR THICKNESS. NICKEL UNDERPLATE AND TIN ON CONTACT TAILS USB TYPE C 2.0 CONNECTORS: 3µ" [0.076 MICRONS] MIN. ON MATING SURFACES, NICKEL UNDERPLATE AND GOLD FLASH ON CONTACT TAILS
MAIN HOUSING: ENGINEERING THERMOPLASTIC, FLAMMABILITY RATING UL94V-0, COLOUR: BLACK
SHIELD: COPPER ALLOY OR STAINLESS STEEL WITH TIN FINISHED PCB TAILS.
- RECOMMENDED SOLDERING TEMPERATURE:**
 WAVE SOLDER PEAK TEMPERATURE 260°C FOR 5 TO 8 SECONDS.
- AMPHENOL PART NUMBER:** RJE7G-5AA-XXX1-11


SHIELD EMI TABS OPTIONS:
 1 = WITH EMI TABS
 2 = WITHOUT EMI TAB
 REFER TO LED OPTIONS ON PAGE 4 FOR ORDERING CODES.

GOLD PLATING OPTIONS (EXCEPT USB TYPE C)
 0 = GOLD FLASH PLATING
 1 = 6µ" GOLD PLATING
 2 = 15µ" GOLD PLATING
 3 = 30µ" GOLD PLATING
 4 = 50µ" GOLD PLATING

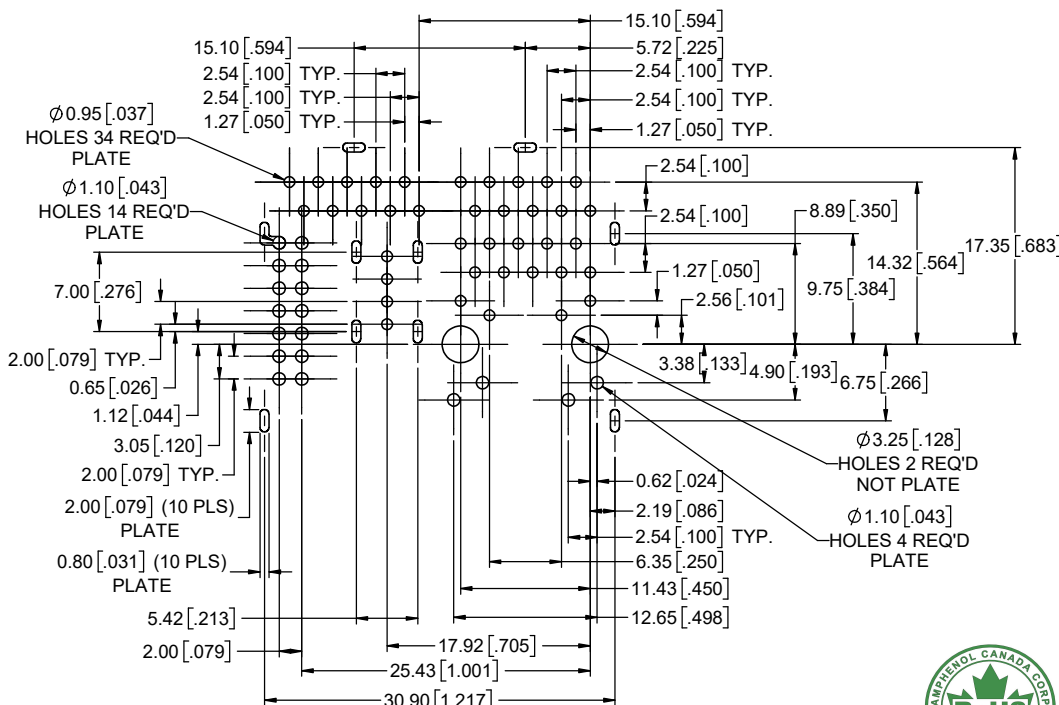

UNLESS SPECIFIED OTHERWISE		DRAWN	RONNIE.C	JUL25/23	Amphenol Canada Corp. Commercial Products COMM COMBO CONNECTOR, TWO GENERAL MODULAR JACKS, WITH A RJ45 1G MAG WITH LEDS, A USB TYPE A 2.0 AND A USB TYPE C 2.0 RECEPTACLE-RoHS COMPLIANT P-RJE7G-5AA-XXX1-11	REV A
PRIMARY UNITS	MILLIMETRES	CHECKED	KELVIN.T	JUL25/23		
SECONDARY	INCHES	M.E. APP'D				
REFERENCE IN PARENTHESES		O.A. APP'D				
GENERAL TOLERANCES		DWG APPR.			DWG. NO. CODE ID NO. 03554 DWG SIZE: X SCALE: 3:1 SHEET 1 OF 4	
1 DECIMAL PLACE	±0.38	ENG. REL. NO.				
2 DECIMAL PLACES	±0.25	REF.				
3 DECIMAL PLACES	±0.10	THIRD ANGLE PROJECTION				
ANGULAR DEGREES	±2°	DO NOT SCALE DRAWING				

REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	INITIAL RELEASE	JUL25/23	KELVIN

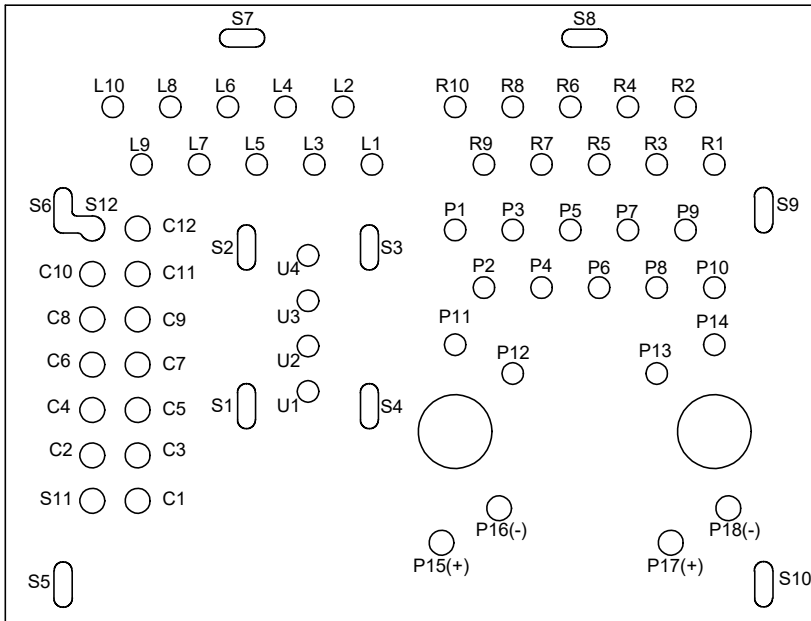

PCB SIGNAL MARKED VIEW
(SCALE 8:1)

USB TYPE C 2.0 PIN ASSIGNMENT		
PIN NUMBER		SIGNAL NAME
BOARD SIDE	CABLE SIDE	
C1	A1, B12	GND
C2	B8	SBU2
C3	--	GND (SEE PIN ASSIGNMENT NOTE 1)
C4	A4, B9	VBUS
C5	A6, B6	DP
C6	B4, A9	VBUS
C7	A7, B7	DN
C8	A5	CC1
C9	--	GND (SEE PIN ASSIGNMENT NOTE 1)
C10	B5	CC2
C11	A8	SBU1
C12	B1, A12	GND
S11, S12	--	SHIELD

PIN ASSIGNMENT NOTES:

1. THE STANDALONE CONNECTOR ALREADY CONNECTS THE C3 AND C1. CONNECTS THE C9 AND C12, THE CUSTOMER DOES NOT NEED TO GROUND C3 AND C9 WHEN DESIGNING THE PC BOARD.
2. ALL PIN ASSIGNMENT ARE "GND" AND "SHIELD" WHICH REQUIRE THE CUSTOMER TO BE GROUNDED WHEN DESIGNING THE PC BOARD, INCLUDING:
--U4, S1 TO S4 FOR USB TYPE A 2.0
--S5 TO S10 FOR RJ W/O MAGNETICS
--P10 FOR RJ WITH MAGNETICS
--C1, C12, S11, S12 FOR USB TYPE C 2.0

USB TYPE A 2.0 PIN ASSIGNMENT	
PIN NUMBER	SIGNAL NAME
U1	VBUS
U2	D-
U3	D+
U4	GND
S1 TO S4	SHIELD


RJ W/O MAGNETICS PIN ASSIGNMENT		
PORT ITEM	PIN NUMBER	SIGNAL NAME
RJ45 UNIVERSAL IO (LEFT PORT)	L1	Rx
	L2	GND1
	L3	Vcc1
	L4	Analog sense
	L5	Digital/PWM
	L6	GND2
	L7	Vcc2
	L8	Analog sense
	L9	Digital/PWM
	L10	Tx
RJ45 SERIAL (RIGHT PORT)	R1	Vcc1
	R2	Tx
	R3	Digital/PWM
	R4	GND1
	R5	Analog sense
	R6	General/Detect
	R7	GND2
	R8	Rx
	R9	Vcc2
	R10	Vcc2
S5 TO S10		SHIELD

RJ WITH MAGNETICS PIN ASSIGNMENT			
CABLE SIDE		BOARD SIDE	
PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
J1	MX0+	P1	MD0+
J2	MX0-	P2	MD0-
J3	MX1+	P3	MD1+
J4	MX2+	P4	MD1-
J5	MX2-	P5	MD2+
J6	MX1-	P6	MD2-
J7	MX3+	P7	MD3+
J8	MX3-	P8	MD3-
--	--	P9	--
--	--	P10	GND
--	--	P11	MDCT0
--	--	P12	MDCT1
--	--	P13	MDCT2
--	--	P14	MDECT3




UNLESS SPECIFIED OTHERWISE	DRAWN	RONNIE.C	JUL25/23
PRIMARY UNITS MILLIMETRES	CHECKED	KELVIN.T	JUL25/23
SECONDARY INCHES	M.E. APP'D		
REFERENCE IN PARENTHESES	O.A. APP'D		
GENERAL TOLERANCES	DWG APPR.		
1 DECIMAL PLACE ± 0.38	ENG. REL. NO.		
2 DECIMAL PLACES ± 0.25	REF.		
3 DECIMAL PLACES ± 0.10	THIRD ANGLE PROJECTION		
ANGULAR DEGREES $\pm 2^\circ$			

Amphenol Canada Corp.			
Commercial Products			
COMM COMBO CONNECTOR, TWO GENERAL MODULAR JACKS, WITH A RJ45 1G MAG WITH LEDS, A USB TYPE A 2.0 AND A USB TYPE C 2.0 RECEPTACLE-RoHS COMPLIANT			
P-RJE7G-5AA-XXX1-11			REV A
CODE ID NO. 03554	DWG SIZE: X	SCALE: 3:1	SHEET 2 OF 4

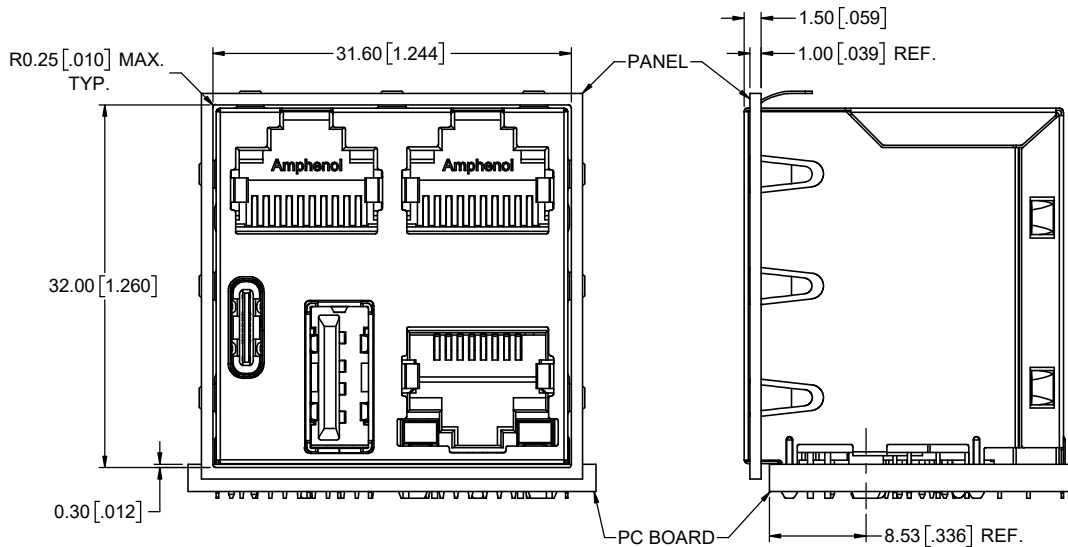


RECOMMENDED PANEL CUTOUT
(TOLERANCE: ±0.10[±0.004])


RJ45 WITH MAGNETICS SCHEMATICS:

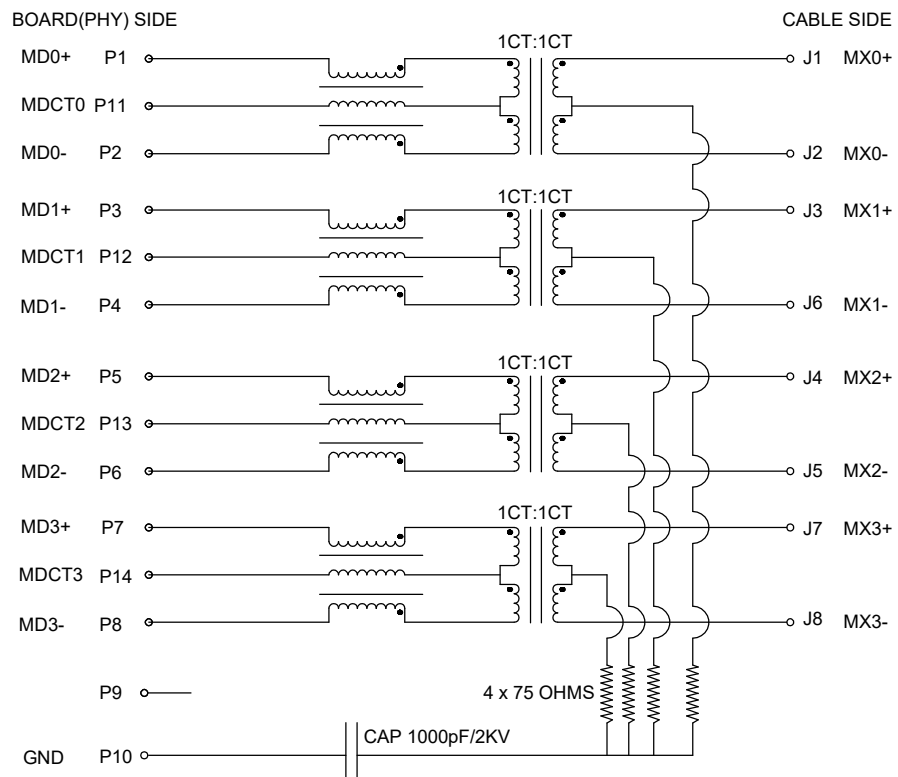

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

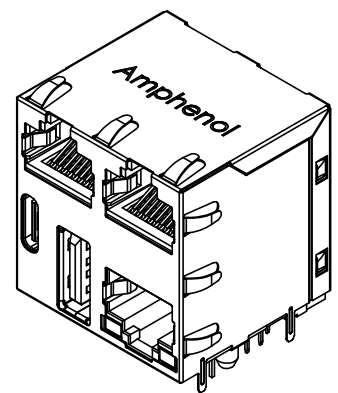

PN: RJE7G-5AA-1XX1-11
(SHIELD WITH EMI TABS AS SHOWN)

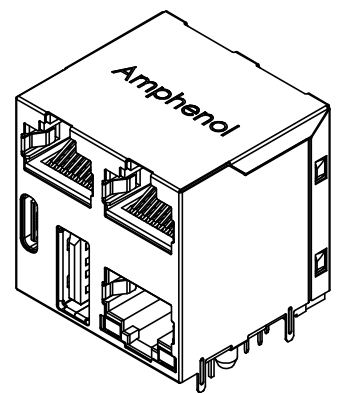


PN: RJE7G-5AA-2XX1-11
(SHIELD WITHOUT EMI TAB AS SHOWN)

ELECTRICAL SPECIFICATION @25 °C FOR RJ45 WITH MAGNETICS:


- TURN RATIO @100KHz:
(P1-P2): (J1-J2) = 1:1 ±5%
(P3-P4): (J3-J6) = 1:1 ±5%
(P5-P6): (J4-J5) = 1:1 ±5%
(P7-P8): (J7-J8) = 1:1 ±5%
- PRIMARY INDUCTANCE:
(P1-P2): 350 µH MINIMUM @ 100KHz, 0.1V, 8mA DC BIAS
(P3-P4): 350 µH MINIMUM @ 100KHz, 0.1V, 8mA DC BIAS
(P5-P6): 350 µH MINIMUM @ 100KHz, 0.1V, 8mA DC BIAS
(P7-P8): 350 µH MINIMUM @ 100KHz, 0.1V, 8mA DC BIAS
- DC TESISTANCE:
(J1-J2):(J3-J6):(J4-J5):(J7-J8) = 1.2 OHMS MAXIMUM
- INSERTION LOSS:
1 TO 100MHz: -1.0dB MAXIMUM
100 TO 125MHz: -1.2dB MAXIMUM
- RETURN LOSS:
1 TO 40MHz: -16dB MINIMUM
40 TO 60MHz: -12dB MINIMUM
60 TO 80MHz: -10dB MINIMUM
80 TO 100MHz: -8dB MINIMUM
- CROSS TALK: -30dB MINIMUM
- ISOLATION: PHY SIDE TO CABLE SIDE: 2.250VDC
- COMMON TO COMMON MODE ATTENUATION: -30dB MIMUM @1MHz TO 100MHz

UNLESS SPECIFIED OTHERWISE		DRAWN	RONNIE.C	JUL25/23	Amphenol Canada Corp. Commercial Products COMM COMBO CONNECTOR, TWO GENERAL MODULAR JACKS, WITH A RJ45 1G MAG WITH LEDS, A USB TYPE A 2.0 AND A USB TYPE C 2.0 RECEPTACLE-RoHS COMPLIANT	
PRIMARY UNITS	MILLIMETRES	CHECKED	KELVIN.T	JUL25/23		
SECONDARY	INCHES	M.E. APP'D				
REFERENCE IN PARENTHESES		O.A. APP'D				
GENERAL TOLERANCES		DWG APPR.			P-RJE7G-5AA-XXX1-11	
1 DECIMAL PLACE	±0.38	ENG. REL. NO.				
2 DECIMAL PLACES	±0.25	REF.				
3 DECIMAL PLACES	±0.10	THIRD ANGLE PROJECTION				
ANGULAR DEGREES	±2°	DO NOT SCALE DRAWING			CODE ID NO. 03554	REV A
		DWG. NO.			DWG SIZE: X	SHEET 3 OF 4
		SCALE: 3:1				

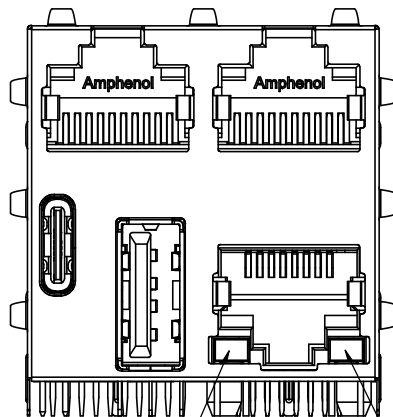


LED 2 (LEFT LED)


LED 1 (RIGHT LED)

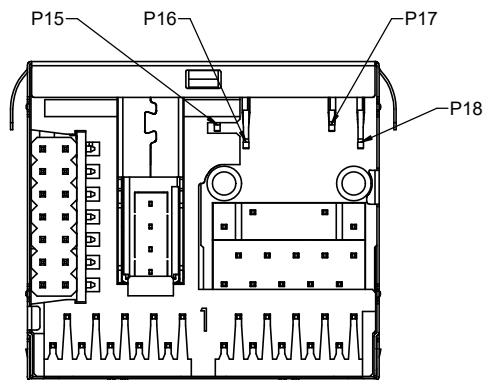

SINGLE COLOUR LED



BI-COLOUR GREEN/YELLOW LED
(E.G. BiC GR/YE)

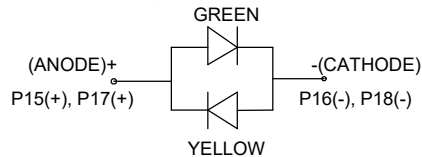

LED SCHEMATIC



EXAMPLE:
AMPHENOL PART NUMBER: RJE7G-5AA-13X1-11

LED COLOR CODE

CODE	LED 2 (LEFT)	LED 1 (RIGHT)	CODE	LED 2 (LEFT)	LED 1 (RIGHT)	CODE	LED 2 (LEFT)	LED 1 (RIGHT)
0	BLOCKED	BLOCKED	9	GREEN	BLOCKED	J	BiC RD/GR	YELLOW
1	YELLOW	GREEN	A	BiC GR/YE	BiC GR/YE	K	YELLOW	BiC GR/OR
2	BLOCKED	GREEN	B	BiC RD/GR	BiC RD/GR	L	BiC GR/YE	RED
3	YELLOW	BLOCKED	C	BiC RD/GR	BiC GR/YE	M	RED	YELLOW
4	GREEN	YELLOW	D	GREEN	BiC GR/YE	N	BiC GR/RD	BiC GR/YE
5	GREEN	GREEN	E	YELLOW	BiC GR/YE	P	GREEN	BiC RD/GR
6	YELLOW	YELLOW	F	BiC GR/YE	GREEN	R	BiC GR/OR	GREEN
7	RED	GREEN	G	BiC GR/OR	BiC GR/OR	T	RED	RED
8	GREEN	RED	H	BiC GR/YE	GREEN	V	BiC RD/GR	GREEN

NOTES:

1. PRIMARY COLOR FOR BI-COLOR LEDS IN STANDARD ANODE/CATHODE CONFIGURATION IS:
RED-GREEN = RED
RED-YELLOW = RED
GREEN-YELLOW = GREEN

2. LEGEND:
BiC = BI-COLOR LED
YE = YELLOW
GR = GREEN
RD = RED
OR = ORANGE

UNLESS SPECIFIED OTHERWISE	DRAWN	RONNIE.C	JUL25/23
PRIMARY UNITS MILLIMETRES	CHECKED	KELVIN.T	JUL25/23
SECONDARY INCHES	M.E. APP'D		
REFERENCE IN PARENTHESES	O.A. APP'D		
GENERAL TOLERANCES	DWG APPR.		
1 DECIMAL PLACE ± 0.38	ENG. REL. NO.		
2 DECIMAL PLACES ± 0.25	REF.		
3 DECIMAL PLACES ± 0.10	THIRD ANGLE PROJECTION		
ANGULAR DEGREES $\pm 2^\circ$	DO NOT SCALE DRAWING		

Amphenol Canada Corp. Commercial Products			
COMM COMBO CONNECTOR, TWO GENERAL MODULAR JACKS, WITH A RJ45 1G MAG WITH LEDS, A USB TYPE A 2.0 AND A USB TYPE C 2.0 RECEPTACLE-RoHS COMPLIANT			
P-RJE7G-5AA-XXX1-11			REV A
CODE ID NO. 03554	DWG SIZE: X	SCALE: 3:1	SHEET 4 OF 4