

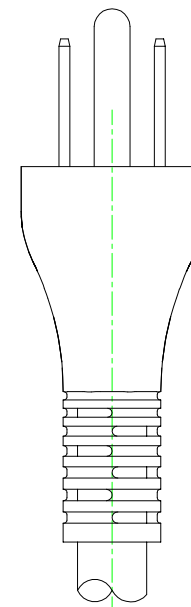
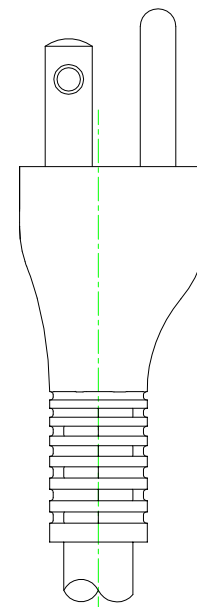
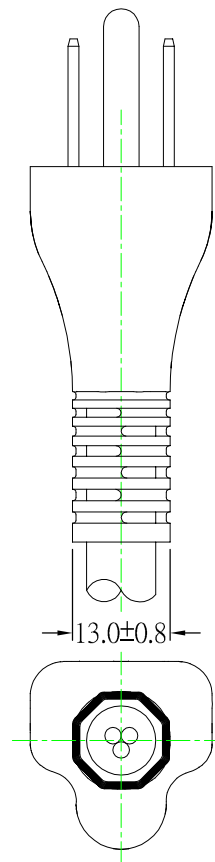
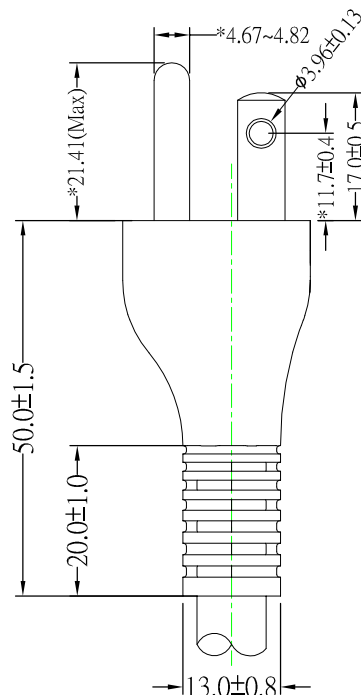
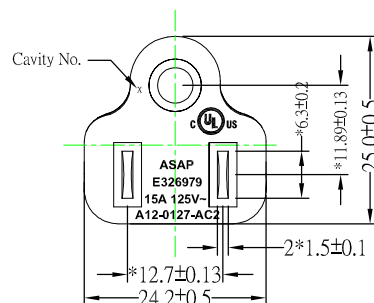


NOTE:

Technical Requirement:The dimension with" * " is for safety standard.

REV.	DESCRIPTION	DESIGN	APPROVAL	DATE
A	NEW	JING LIU	QS LIU	2017.9.27

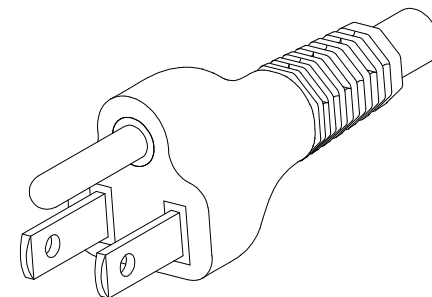

Marking







X. :±0.6	X.° :±1°	DWG TYPE: PRODUCT DRAWING	Part CA-C19-US		
.X :±0.4	.X° :±0.6°		TITLE: UL 5-15P Three Pin PLUG		
.XX:±0.10	.XX°:±0.3°	MOUID NO: AC-P0127-x	DWG NO: A12-0127-AC2-4		
UNITS	mm	APPD: 欧阳光仁	 TIGER Power Supplies		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LUXSHARE-ICT AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF LUXSHARE-ICT		CHKD: 刘秋顺			
		DRAW: 刘景	SCALE SHEET REV. NONE 1/1 A		

1	SJT 14AWGX3C	OD:9.2	Round Cable
NO.	SPECIFICATION	Remark	

NOTE:

Technical Requirement:The dimension with" * " is for safety standard.


REV.	DESCRIPTION	DESIGN	APPROVAL	DATE
A	NEW	JING LIU	QS LIU	2017.10.06

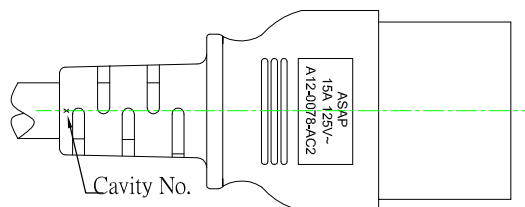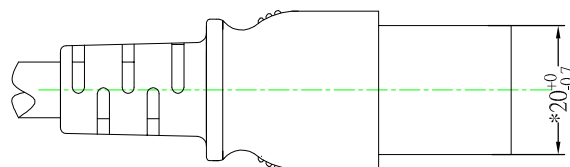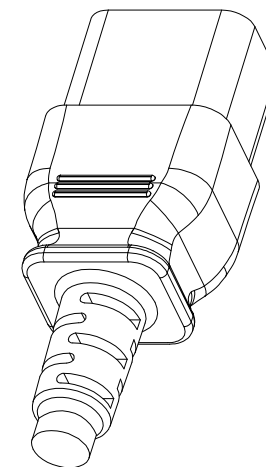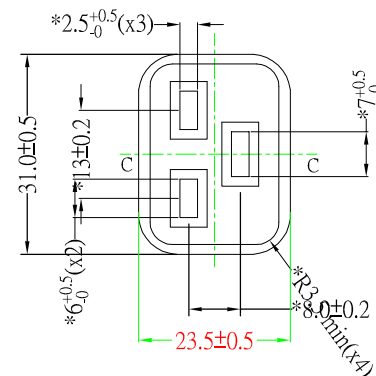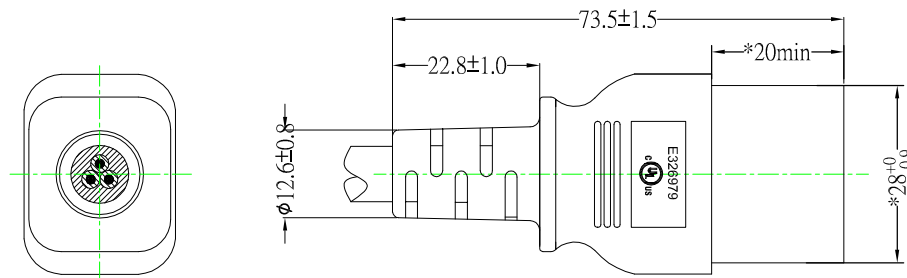ASAP
15A 125V~
A12-0078-AC2

E326979



Marking

X. ±0.6	X.° ±1°	DWG TYPE: PRODUCT DRAWING	Part CA-C19-US			
.X ±0.4	.X° ±0.6°		TITLE: UL C19 Connector			
.XX±0.10	.XX°±0.3°	MOUID NO: AC-C0024-x	DWG NO: A12-0078-AC2-2			
UNITS	mm	APPD: 欧阳光仁		SCALE	SHEET	REV.
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LUXSHARE-ICT AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF LUXSHARE-ICT		CHKD: 刘秋顺		NONE	1/1	A
		DRAW: 刘景				

1	SJT 14AWG/3C OD:9.2MM	Round Cable
NO.	SPECIFICATION	Remark

8			7			6			5			4			3			2			1																																																																										
Item						Specification						REV.						DESCRIPTION						DATE																																																																							
Construction item						ComponentA						A						NEW						2014.12.06																																																																							
Conductor						14AWG						Bare Copper						41/0.254±0.008BC																																																																													
Material						PVC						0.76mm																																																																																			
Min Average Thickness						0.69mm																																																																																									
Min at any Point Thickness						3.5±0.15 mm																																																																																									
O.D.						Black, White, Green																																																																																									
Color						Right (S)																																																																																									
Direction						--																																																																																									
Filler						7.6mmRef																																																																																									
Diameter						--																																																																																									
Material						--																																																																																									
Overlap Rate						--																																																																																									
Direction						--																																																																																									
Material						PVC																																																																																									
Diameter						9.2±0.20mm																																																																																									
Min Average Thickness						0.76mm																																																																																									
Min at any Point Thickness						0.61mm																																																																																									
Color						Black																																																																																									
Extrusion						Solid																																																																																									
Surface						Plane																																																																																									
Marking Color						White																																																																																									
Marking						Marking Content						(UL) E325848 SJT VW-1 105℃ 300V 3*2.08mm2(14AWG).....CSA 246445 SJT FT1 105℃ 300V 3*2.08mm2(14AWG) ASAP																																																																																			
Electric Characters						Physical Characters:																																																																																									
1. Voltage rating :300V						1. Flame test of cable : VW-1																																																																																									
2. Temperature rating :105℃						2. Tensil strength test are before aging :																																																																																									
3. Spark test : AC-6KV						> 1.05kgf/mm ² (Insulation,Jacket)																																																																																									
4. Dielectric strength : AC-2000V 1min (Insulation, cable)						3. Tensil strength test are after aging:																																																																																									
5. Insulation resistance:						>85%Tensil strength before aging (Insulation,Jacket)																																																																																									
PVC DC-500V 0.762MΩ.KM MIN at 20℃						4.Elongation before aging: >100% (Insulation,Jacket)																																																																																									
6. Conductor resistance :						5. Elongation after aging:																																																																																									
14AWG 8.88Ω/KM MAXX at 20℃						>65%Tensil strength before aging(Insulation)																																																																																									
						>45%Tensil strength before aging(Jacket)																																																																																									
8						7						6						5						4						3						2						1																																																					
Environmental Requirement : harmful material and process control, please follow DOC NO "QW-Q-043"																																																																																															
Conductor												Insulation												Jacket																																																																							
Jacket												Min Average Thickness												0.76mm																																																																							
Min at any Point Thickness												0.61mm																																																																																			
Color												Black																																																																																			
Extrusion												Solid																																																																																			
Surface												Plane																																																																																			
Marking Color												White																																																																																			
Marking												Marking Content												(UL) E325848 SJT VW-1 105℃ 300V 3*2.08mm2(14AWG).....CSA 246445 SJT FT1 105℃ 300V 3*2.08mm2(14AWG) ASAP																																																																							
Electric Characters												Physical Characters:																																																																																			
1. Voltage rating :300V												1. Flame test of cable : VW-1																																																																																			
2. Temperature rating :105℃												2. Tensil strength test are before aging :																																																																																			
3. Spark test : AC-6KV												> 1.05kgf/mm ² (Insulation,Jacket)																																																																																			
4. Dielectric strength : AC-2000V 1min (Insulation, cable)												3. Tensil strength test are after aging:																																																																																			
5. Insulation resistance:												>85%Tensil strength before aging (Insulation,Jacket)																																																																																			
PVC DC-500V 0.762MΩ.KM MIN at 20℃												4.Elongation before aging: >100% (Insulation,Jacket)																																																																																			
6. Conductor resistance :												5. Elongation after aging:																																																																																			
14AWG 8.88Ω/KM MAXX at 20℃												>65%Tensil strength before aging(Insulation)																																																																																			
												>45%Tensil strength before aging(Jacket)																																																																																			
8												7												6												5												4												3												2												1											
Item												Specification												REV.												DESCRIPTION												DATE																																															
Construction item												ComponentA												A												NEW												2014.12.06																																															
Conductor												14AWG												Bare Copper												41/0.254±0.008BC																																																											
Material												PVC												0.76mm																																																																							
Min Average Thickness												0.69mm																																																																																			
Min at any Point Thickness												3.5±0.15 mm																																																																																			
O.D.												Black, White, Green																																																																																			
Color												Right (S)																																																																																			
Direction												--																																																																																			
Filler												7.6mmRef																																																																																			
Diameter												--																																																																																			
Material												--																																																																																			
Overlap Rate												--																																																																																			
Direction												--																																																																																			
Material												PVC																																																																																			
Diameter												9.2±0.20mm																																																																																			
Min Average Thickness												0.76mm																																																																																			
Min at any Point Thickness												0.61mm																																																																																			
Color												Black																																																																																			
Extrusion												Solid																																																																																			
Surface												Plane																																																																																			
Marking Color												White																																																																																			
Marking												Marking Content												(UL) E325848 SJT VW-1 105℃ 300V 3*2.08mm2(14AWG).....CSA 246445 SJT FT1 105℃ 300V 3*2.08mm2(14AWG) ASAP																																																																							
Electric Characters												Physical Characters:																																																																																			
1. Voltage rating :300V												1. Flame test of cable : VW-1																																																																																			
2. Temperature rating :105℃												2. Tensil strength test are before aging :																																																																																			
3. Spark test : AC-6KV												> 1.05kgf/mm ² (Insulation,Jacket)																																																																																			
4. Dielectric strength : AC-2000V 1min (Insulation, cable)												3. Tensil strength test are after aging:																																																																																			
5. Insulation resistance:												>85%Tensil strength before aging (Insulation,Jacket)																																																																																			
PVC DC-500V 0.762MΩ.KM MIN at 20℃												4.Elongation before aging: >100% (Insulation,Jacket)																																																																																			
6. Conductor resistance :												5. Elongation after aging:																																																																																			
14AWG 8.88Ω/KM MAXX at 20℃												>65%Tensil strength before aging(Insulation)																																																																																			
												>45%Tensil strength before aging(Jacket)																																																																																			
8												7												6												5												4												3												2												1											
Item												Specification												REV.												DESCRIPTION												DATE																																															
Construction item												ComponentA												A												NEW												2014.12.06																																															
Conductor												14AWG												Bare Copper												41/0.254±0.008BC																																																											
Material												PVC												0.76mm																																																																							
Min Average Thickness												0.69mm																																																																																			
Min at any Point Thickness												3.5±0.15 mm																																																																																			
O.D.												Black, White, Green																																																																																			
Color												Right (S)																																																																																			
Direction												--																																																																																			
Filler												7.6mmRef																																																																																			
Diameter												--																																																																																			
Material												--																																																																																			
Overlap Rate												--																																																																																			
Direction												--																																																																																			
Material												PVC																																																																																			
Diameter												9.2±0.20mm																																																																																			
Min Average Thickness												0.76mm																																																																																			
Min at any Point Thickness												0.61mm																																																																																			
Color												Black																																																																																			
Extrusion												Solid																																																																																			
Surface												Plane																																																																																			
Marking Color												White																																																																																			
Marking												Marking Content												(UL) E325848 SJT VW-1 105℃ 300V 3*2.08mm2(14AWG).....CSA 246445 SJT FT1 105℃ 300V 3*2.08mm2(14AWG) ASAP																																																																							
Electric Characters												Physical Characters:																																																																																			
1. Voltage rating :300V												1. Flame test of cable : VW-1																																																																																			
2. Temperature rating :105℃												2. Tensil strength test are before aging :																																																																																			
3. Spark test : AC-6KV												> 1.05kgf/mm ² (Insulation,Jacket)																																																																																			
4. Dielectric strength : AC-2000V 1min (Insulation, cable)												3. Tensil strength test are after aging:																																																																																			
5. Insulation resistance:												>85%Tensil strength before aging (Insulation,Jacket)																																																																																			
PVC DC-500V 0.762MΩ.KM MIN at 20℃												4.Elongation before aging: >100% (Insulation,Jacket)																																																																																			
6. Conductor resistance :												5. Elongation after aging:																																																																																			
14AWG 8.88Ω/KM MAXX at 20℃												>65%Tensil strength before aging(Insulation)																																																																																			
												>45%Tensil strength before aging(Jacket)																																																																																			
8												7												6												5												4												3												2												1											
Item												Specification												REV.												DESCRIPTION												DATE																																															
Construction item												ComponentA												A												NEW												2014.12.06																																															
Conductor												14AWG												Bare Copper												41/0.254±0.008BC																																																											
Material												PVC												0.76mm																																																																							
Min Average Thickness												0.69mm																																																																																			
Min at any Point Thickness												3.5±0.15 mm																																																																																			
O.D.												Black, White, Green																																																																																			
Color												Right (S)																																																																																			
Direction												--																																																																																			
Filler												7.6mmRef																																																																																			
Diameter												--																																																																																			
Material												--																																																																																			
Overlap Rate												--																																																																																			
Direction												--																																																																																			
Material												PVC																																																																																			
Diameter												9.2±0.20mm																																																																																			
Min Average Thickness												0.76mm																																																																																			
Min at any Point Thickness												0.61mm																																																																																			
Color												Black																																																																																			
Extrusion												Solid																																																																																			
Surface												Plane																																																																																			
Marking Color												White																																																																																			
Marking												Marking Content												(UL) E325848 SJT VW-1 105℃ 300V 3*2.08mm2(14AWG).....CSA 246445 SJT FT1 105℃ 300V 3*2.08mm2(14AWG) ASAP																																																																							
Electric Characters												Physical Characters:																																																																																			
1. Voltage rating :300V												1. Flame test of cable : VW-1																																																																																			
2. Temperature rating :105℃												2. Tensil strength test are before aging :																																																																																			
3. Spark test : AC-6KV												> 1.05kgf/mm ² (Insulation,Jacket)																																																																																			
4. Dielectric strength : AC-2000V 1min (Insulation, cable)												3. Tensil strength test are after aging:																																																																																			
5. Insulation resistance:												>85%Tensil strength before aging (Insulation,Jacket)																																																																																			
PVC DC-500V 0.762MΩ.KM MIN at 20℃												4.Elongation before aging: >100% (Insulation,Jacket)																																																																																			
6. Conductor resistance :												5. Elongation after aging:																																																																																			
14AWG 8.88Ω/KM MAXX at 20℃												>65%Tensil strength before aging(Insulation)																																																																																			
												>45%Tensil strength before aging(Jacket)																																																																																			
8												7												6												5												4												3												2												1											
Item												Specification												REV.												DESCRIPTION												DATE																																															
Construction item												ComponentA												A												NEW												2014.12.06																																															
Conductor												14AWG												Bare Copper												41/0.254±0.008BC																																																											
Material												PVC												0.76mm																																																																							
Min Average Thickness												0.69mm																																																																																			
Min at any Point Thickness												3.5±0.15 mm																																																																																			
O.D.												Black, White, Green																																																																																			
Color												Right (S)																																																																																			
Direction												--																																																																																			
Filler												7.6mmRef																																																																																			
Diameter												--																																																																																			
Material												--																																																																																			
Overlap Rate												--																																																																																			
Direction												--																																																																																			
Material												PVC																																																																																			
Diameter												9.2±0.20mm																																																																																			
Min Average Thickness												0.76mm																																																																																			
Min at any Point Thickness												0.61mm																																																																																			
Color												Black																																																																																			
Extrusion												Solid																																																																																			
Surface												Plane																																																																																			
Marking Color												White																																																																																			
Marking												Marking Content												(UL) E325848 SJT VW-1 105℃ 300V 3*2.08mm2(14AWG).....CSA 246445 SJT FT1 105℃ 300V 3*2.08mm2(14AWG) ASAP																																																																							
Electric Characters												Physical Characters:																																																																																			
1. Voltage rating :300V												1. Flame test of cable : VW-1																																																																																			
2. Temperature rating :105℃												2. Tensil strength test are before aging :																																																																																			
3. Spark test : AC-6KV												> 1.05kgf/mm ² (Insulation,Jacket)																																																																																			
4. Dielectric strength : AC-2000V 1min (Insulation, cable)												3. Tensil strength test are after aging:																																																																																			
5. Insulation resistance:												>85%Tensil strength before aging (Insulation,Jacket)																																																																																			
PVC DC-500V 0.762MΩ.KM MIN at 20℃												4.Elongation before aging: >100% (Insulation,Jacket)																																																																																			
6. Conductor resistance :												5. Elongation after aging:																																																																																			
14AWG 8.88Ω/KM MAXX at 20℃												>65%Tensil strength before aging(Insulation)																																																																																			
												>45%Tensil strength before aging(Jacket)																																																																																			
8												7												6												5												4												3												2												1											
Item												Specification												REV.												DESCRIPTION												DATE																																															
Construction item												ComponentA												A												NEW												2014.12.06																																															
Conductor												14AWG												Bare Copper												41/0.254±0.008BC																																																											
Material												PVC												0.76mm																																																																							
Min Average Thickness												0.69mm																																																																																			
Min at any Point Thickness												3.5±0.15 mm																																																																																			
O.D.												Black, White, Green																																																																																			
Color												Right (S)																																																																																			
Direction												--																																																																																			
Filler												7.6mmRef																																																																																			
Diameter												--																																																																																			
Material												--																																																																																			
Overlap Rate												--																																																																																			
Direction												--																																																																																			
Material												P																																																																																			