
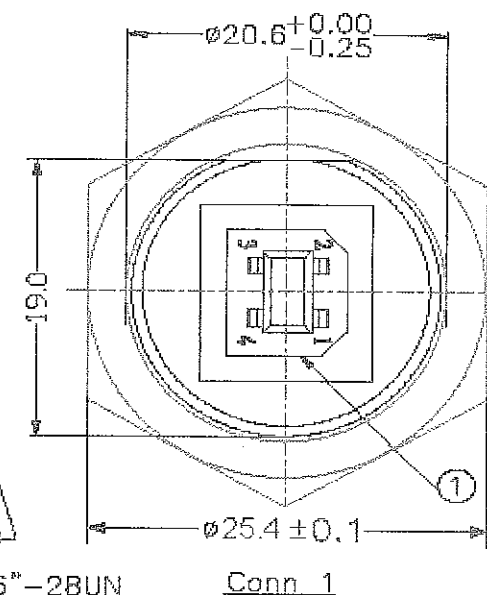
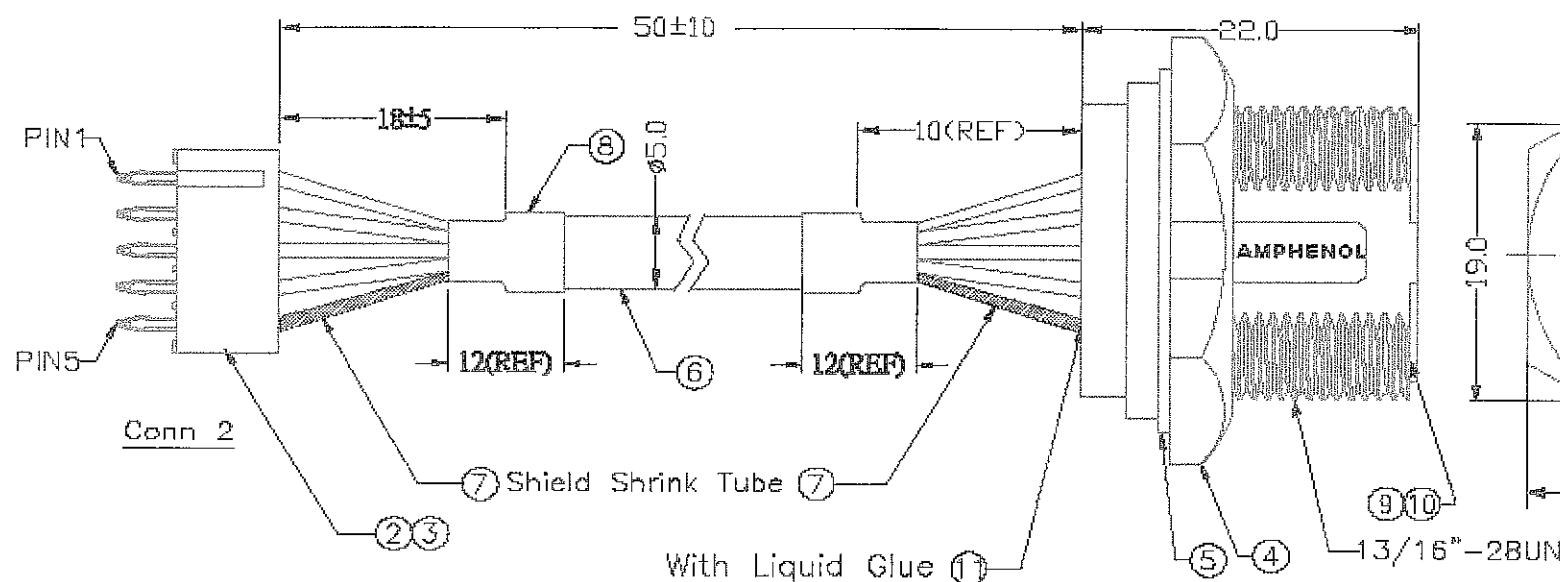


DANS LE BUT CONSTANT D'AMÉLIORER SES PRODUITS, Amphenol Socopex se réserve le droit d'en modifier toute cote ou caractéristique.
[1/07 007 B]

11	Liquid Glue			
10	PCB		PCB FR-4t=1.6	1
9	Connector	Black	ABS 94V-0	1
8	Shrink Tube	Black	ø5.0*14mm	2
7	Shrink Tube	Black	ø1.0*21mm	2
6	Cable	Black	USB2.0 28WG+1P+24AWG*2C+AL+D+B OD=5.0mm, L=65±2mm	1
5	Gasket	Black	EPDM	1
4	Nut	Black	Nylon+30%Glass-Filled	1
3	Terminal		Brass Tin Plated(B2512 JWT)	5
2	Housing	Coffee	B2512H02-05(JWT)PH=2.50mm	1
1	Connector		USB-B FEMALE TIP	1
NO	NAME	COLOR	SPECIFICATION	QTY

1	Red (24AWG)	1
2	White (28AWG)	2
3	Green(28AWG)	3
4	Black(24AWG)	4
5	Drain (28AWG)	
Conn 2	Wire Color	Conn 1
PIN OUT		

RECOMMENDED PANEL CUT-OUT

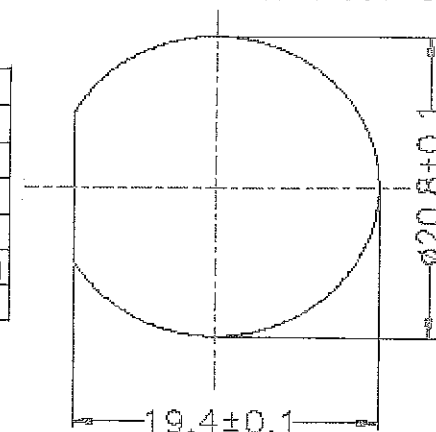

USBB F7 USBB SEALED RECEPTACLE

MODIFICATIONS	A	Plan original	ECHELLE	Amphenol Socopex BP 29 - 74311 THYEZ CEDEX	DESSIN: DAL-BON LE:21/03/05
			/		TECHNIQUE: Y. GUILLOT 22.3.05
			⊕		A
			⊖		190-PLC-099-00 1/1