


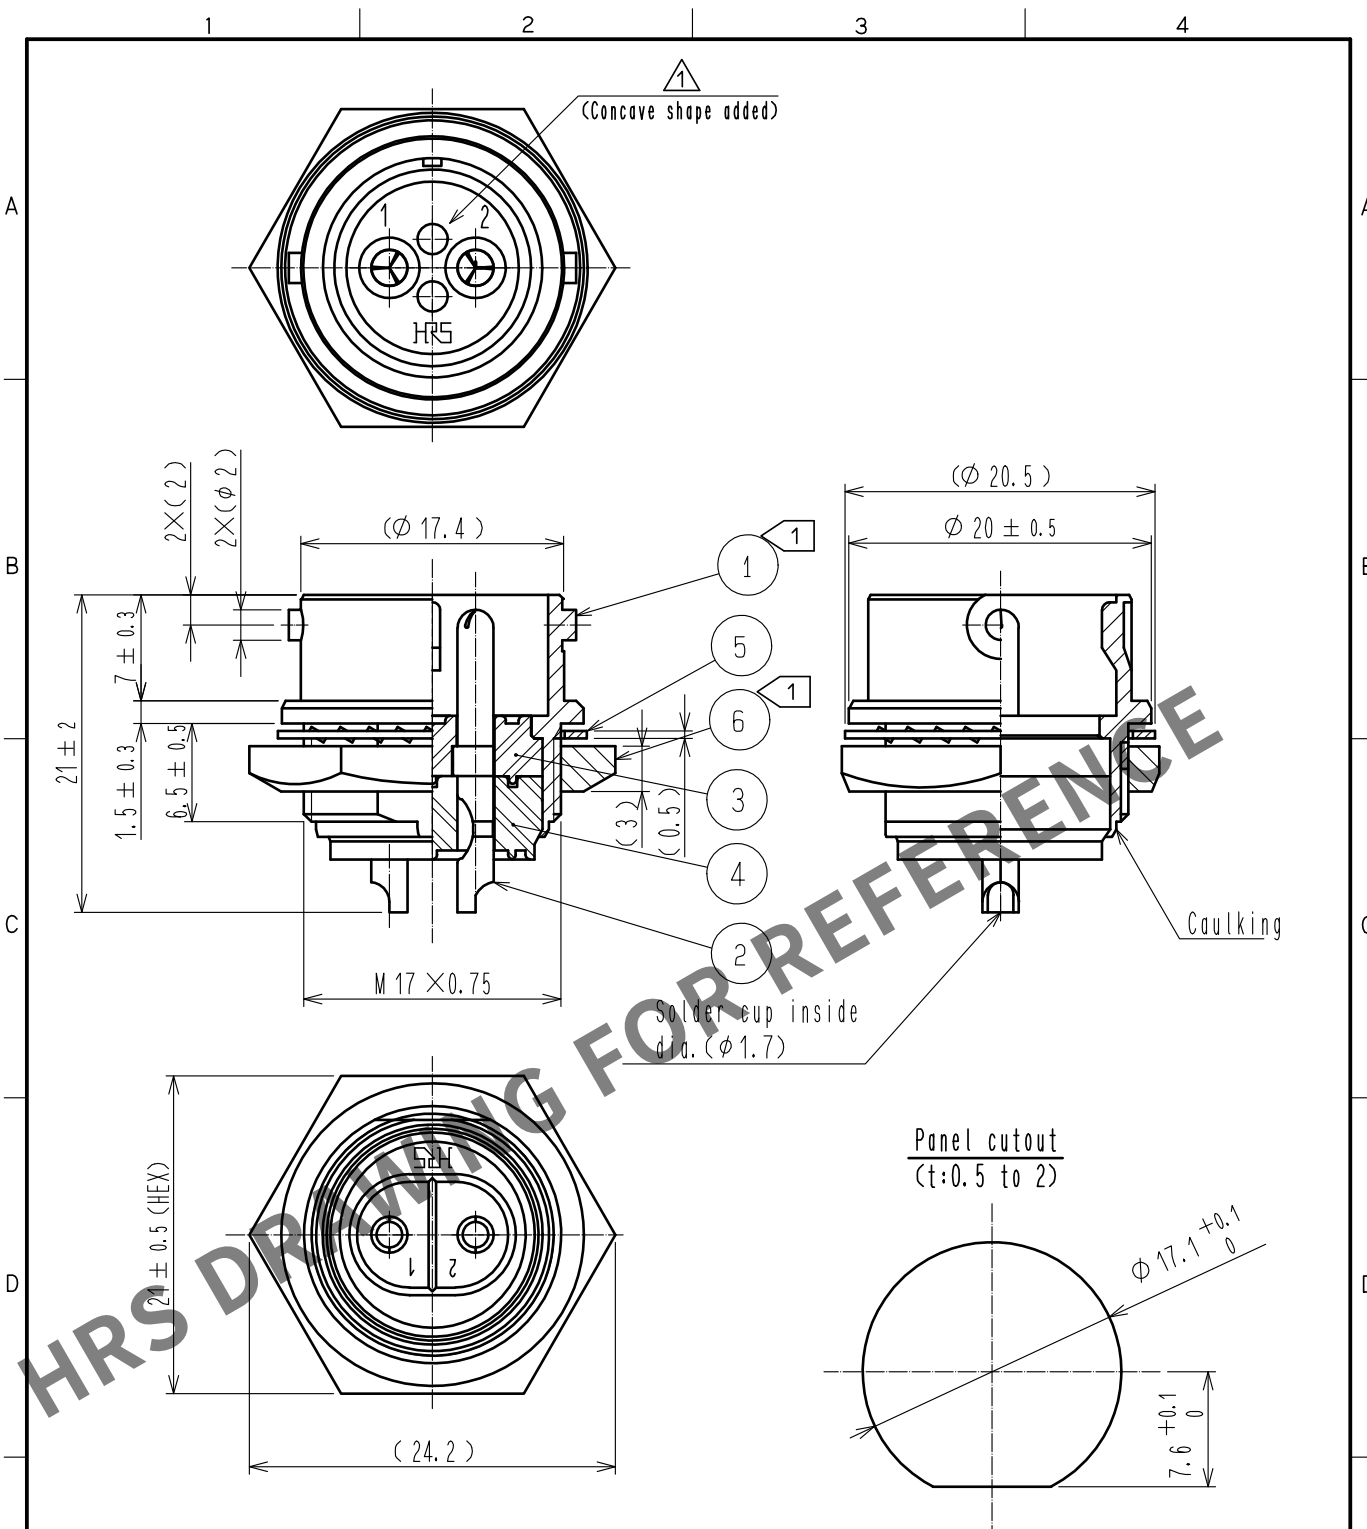

Note ① The tightening torque of Ref. No. ⑥: 3 to 4 N·m.
Apply Loctite 243 HENKEL JAPAN or equivalent to the threaded portion (M17×0.75) of Ref. No. ① in order to prevent loosening.

3	Polyphenylene sulfide	(Black)		6	Brass	Nickel plating		
2	Brass	Silver plating 2μm min.		5	Phosphor bronze	Nickel plating		
1	Brass	Nickel plating		4	Polyphenylene sulfide	(Black)		
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 2 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-C-00016502	DESIGNED TY. SUZUKI	CHECKED HY. KOBAYASHI	DATE 20231110
 HIROSE ELECTRIC CO., LTD.	APPROVED : HY. KOBAYASHI 20230601				DRAWING NO. EDC-040350-81-00			
	CHECKED : HY. KOBAYASHI 20230601				PART NO. RM15QRD-2PA(81)			
	DESIGNED : HT. ZENBA 20230601				CODE NO. C10109-0880-1-81			
	DRAWN : KP. SUZUKI 20230601				 			