

Pro-SIGNAL	PART NO.	REVISIONS								
	ABM-703-RC	ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
		-	А	RELEASED	Veena	14/09/09	Ramya	14/09/09	Farnell	28/09/09

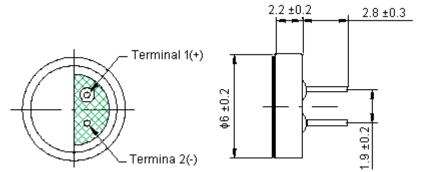



Dimensions : Millimetres

Specifications:

Directivity	: Omni directional.
Standard operating voltage	: 2V.
Maximum operating voltage	: 10V.
Maximum current consumption	: 0.5mA.
Output impedance (F = 1KHz 1Pa)	: <2.2K Ohms.
Frequency	: 100 to 16,000Hz.
Sensitivity (at F = 1KHz, 0dB = 1V/Pa)	: -40 ±3dB.
Signal to noise ratio (F = 1KHz 1Pa) weighted	: >60dB.

Part Number Table

Description	Part Number			
Microphone, Omni, PCB Mount	ABM-703-RC			

http://www.farnell.com

RoHS Compliant

http://www.newark.com

http://www.cpc.co.uk

believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the information and the suitability of the prod-		DRAWN BY: Veena	DATE:	DRAWING TITLE:	/licrophone - Omni, I	PCB Mount	
	UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	CHECKED BY: Ramya	DATE: 14/09/09	SIZE DWG NO.		ELECTRONIC FILE 736559-TDS DWG	REV A
		APPROVED BY:	DATE: 28/09/09	SCALE: NTS	U.O.M.: mm)F 1
SPC pro-SIGNAL is the registered trademark of the Group. © Premier Farnell plc 2009.		Farnell	20/09/09	OC/LEI MTO			