
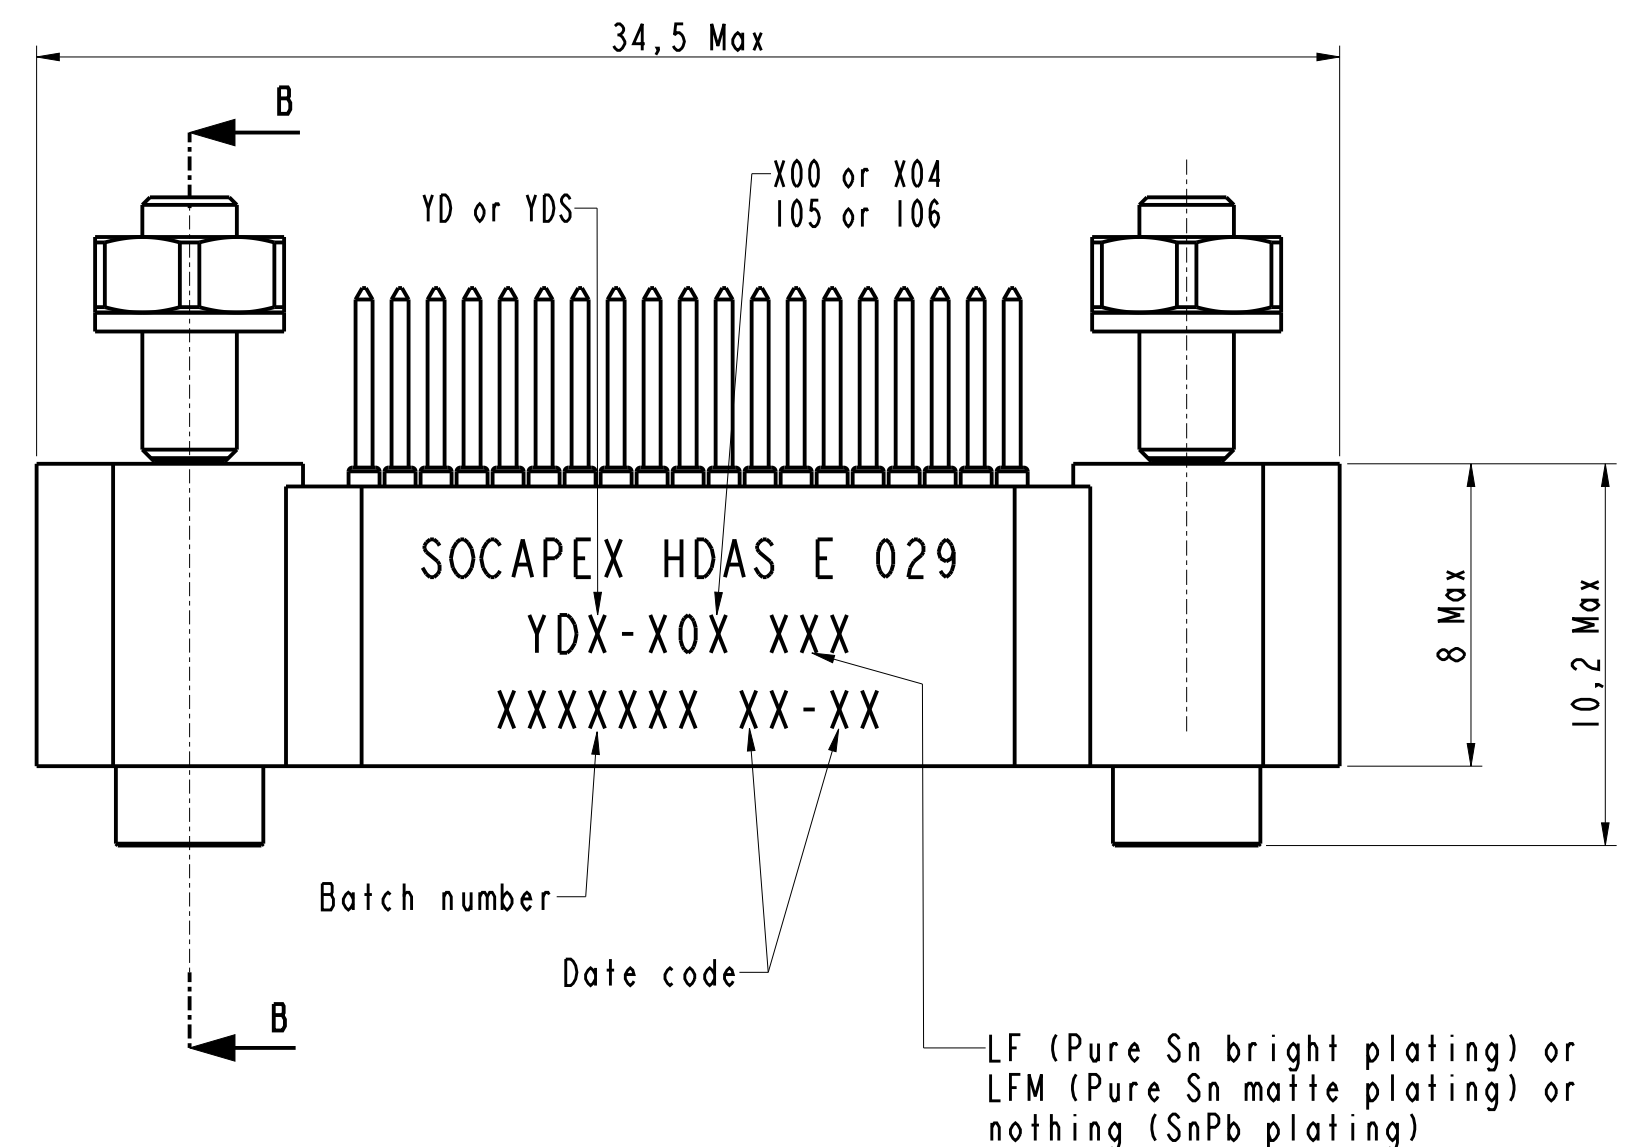
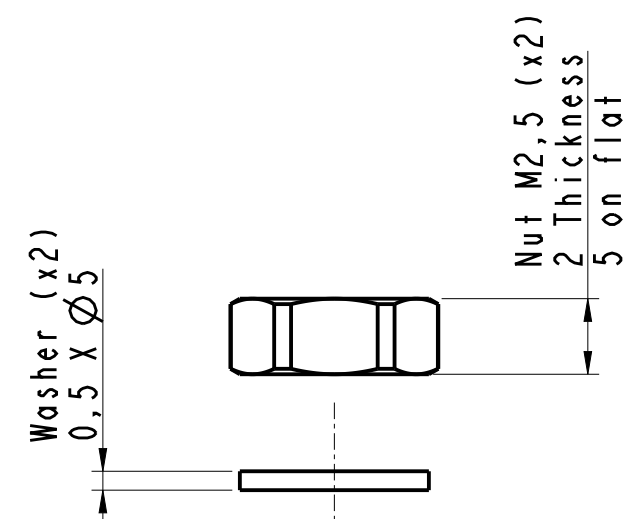


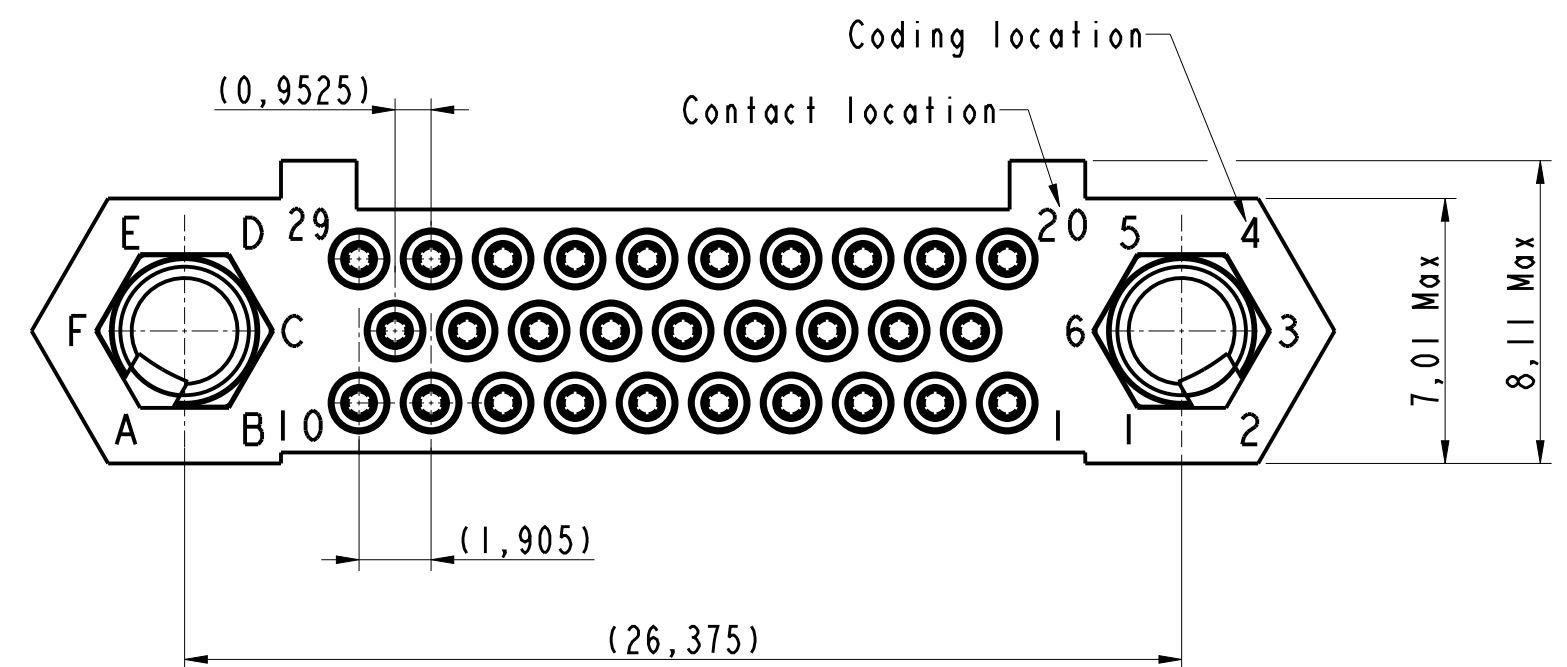

1. Part: HDAS E 029 YDX-X0X XXX
2. External dimensions of a receptacle insulator with 29 signal contacts type YDX
3. Connector delivered with fittings not assembled, coupling torque : 0,25 Nm
4. Standard 00X : Nickel plated over brass fittings.
Deviation 10X : Passivated stainless steel fittings.

Information contained in this document is not subject to Export Control Regulations of the European Union, USA or other countries. Each recipient of this document is responsible for ensuring that transfer or use of any information contained in this document complies with all relevant Export Control regulations and EAR99 regulations.

HDAS E 029 YDX-X0X XXX

LAST APPROVED BY: Kevin Qi


ORIGINAL DRAWING DATE : 26/01/25	CONFIGURATION DATA ARE AVAILABLE IN PDM
--	---

REV: D	PAGE: 1/2
--------	-----------


B.P. 29 74311 THYEZ CEDEX

169-PLC-1397-00


IN THE CONSTANT PURPOSE OF IMPROVING ITS PRODUCTS, Amphenol Socapex RESERVES THE RIGHT TO MODIFY ANY DIMENSION OR CHARACTERISTICS.
FM.NPD.0036.THYEZ.PUNE rev C

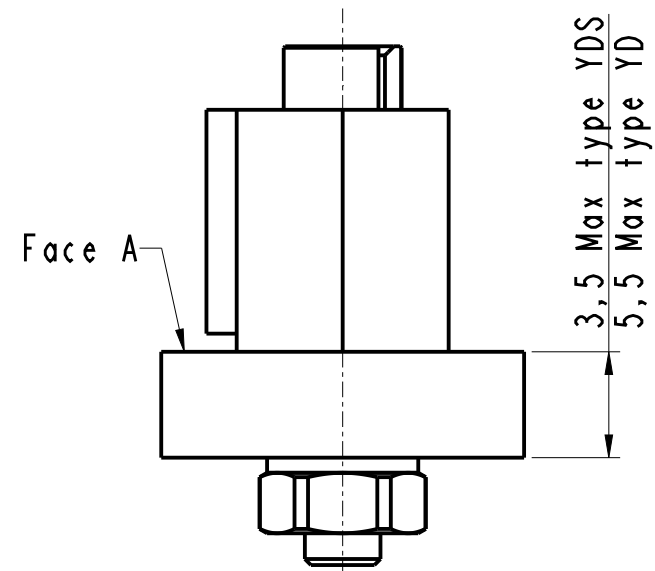

Scale 4

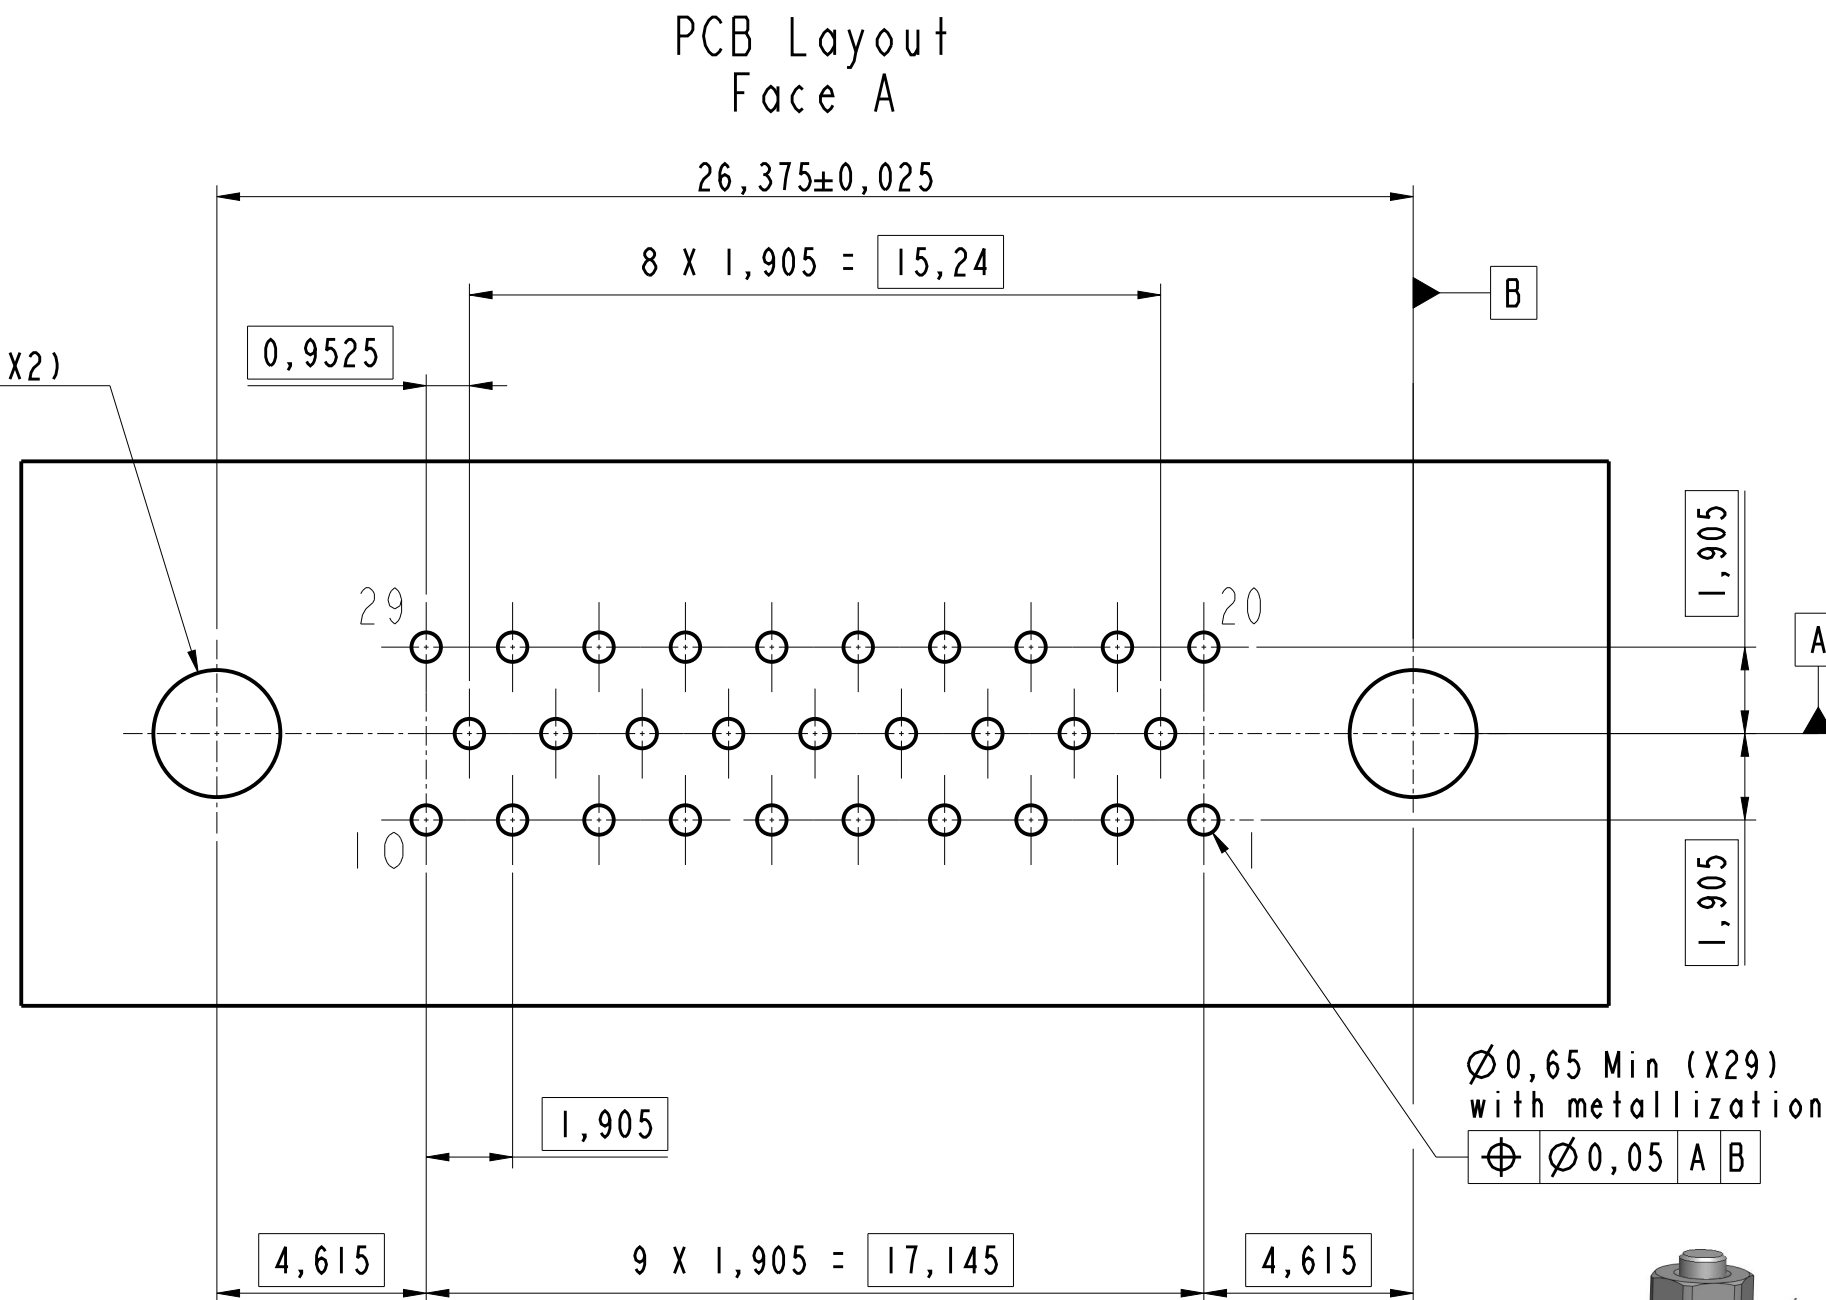

Scale 2,5

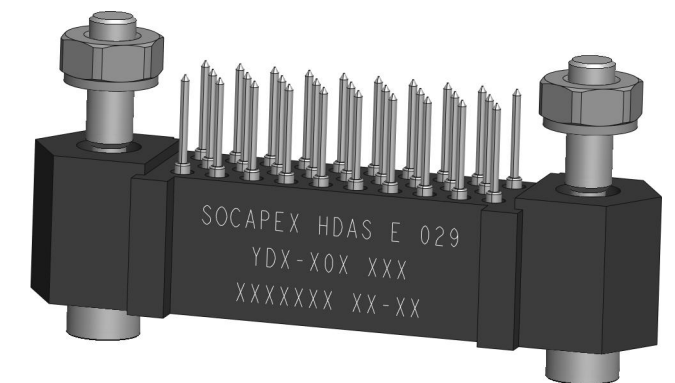

HDAS E 029 YDX-X0X XXX

DRAWN BY : S Satpute		UPDATED BY: S Suryavanshi		LAST APPROVED BY: Kevin Qi	
ALL DIMENSIONS ARE IN MM	AMPHENOL SOCAPEX B.P. 29 74311 THYEZ CEDEX			ORIGINAL DRAWING DATE : 27/08/2019	CONFIGURATION DATA ARE AVAILABLE IN PDM
				REV : D	PAGE : 2/2
				169-PLC-1397-00	
					

B.P. 29 74311 THYEZ CEDEX