

TROMPETER MODEL NO.	INTERFACE
CBJ70TL-G	TRB PER MIL-STD-348, FIGURE 201-2
CBJ70-G	
CBJ70FL-G	
CBJ370-G	TRT PER MIL-STD-348, FIGURE 202-2


REV	ECO	DATE
—	—	—
—	—	—
001	60387	11/20/2025




CBJ70TL-G SHOWN




CBJ370-G SHOWN

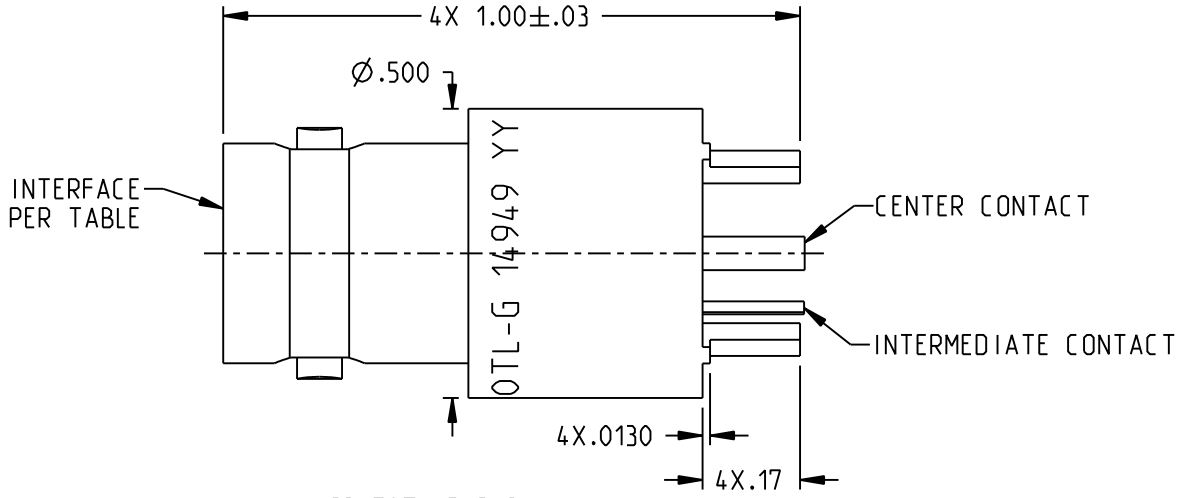


CBJ70TL-G SHOWN

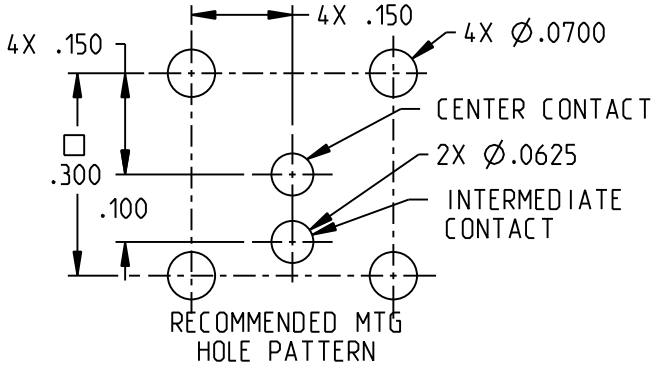


RECOMMENDED MTG HOLE PATTERN



CBJ70TL SHOWN



CBJ70 SHOWN



CBJ70FL SHOWN

NOTES: UNLESS OTHERWISE SPECIFIED:

1. MATERIAL & FINISH:
   1.1 BODY: GOLD PLATED BRASS
   1.2 INSULATOR & DIELECTRIC: PTFE (TEFLON)
   1.3 INTERMEDIATE CONTACT: GOLD PLATED BRASS
   1.4 CENTER CONTACT: GOLD PLATED BERYLLIUM COPPER

2. ELECTRICAL:
   2.1 FREQUENCY (MAX): 500 MHz
   2.2 IMPEDANCE: NON-CONSTANT

cinch CONNECTIVITY SOLUTIONS a bel group

NOTICE: The information in this drawing is PROPRIETARY and must not be used without the permission of Cinch Connectivity Solutions. It may contain data whose export is restricted. Verify status prior to exporting.

INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018

Model No:	CBJX70XX-G
RoHS2 2015/863/EU	☑
Cage Code	14949
3RD ANGLE PROJECTION	
UNLESS OTHERWISE SPECIFIED UNITS: INCH	.XX ±.02 .XXX ±.010 ANGLES ±2°
ENGINEER:	C.MONAHAN
Date:	11/20/2025

TROMPETER

Title:	TRB/TRT CIRCUIT BOARD JACK
Drawing No.	C_3-0378
REV.	001
Size	A
DO NOT SCALE DRAWING	
Workmanship Std:	TFS-4
Sheet	1 OF 1

Please read our datasheet & drawing disclaimer here.