



ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.



REVISIONS

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1102	A	RELEASED	JAP	5/21/96	JN	09/25/08	JN	09/25/08

DOC. NO. SPC-F005 * Effective: 12/21/98 * DCP No: 680

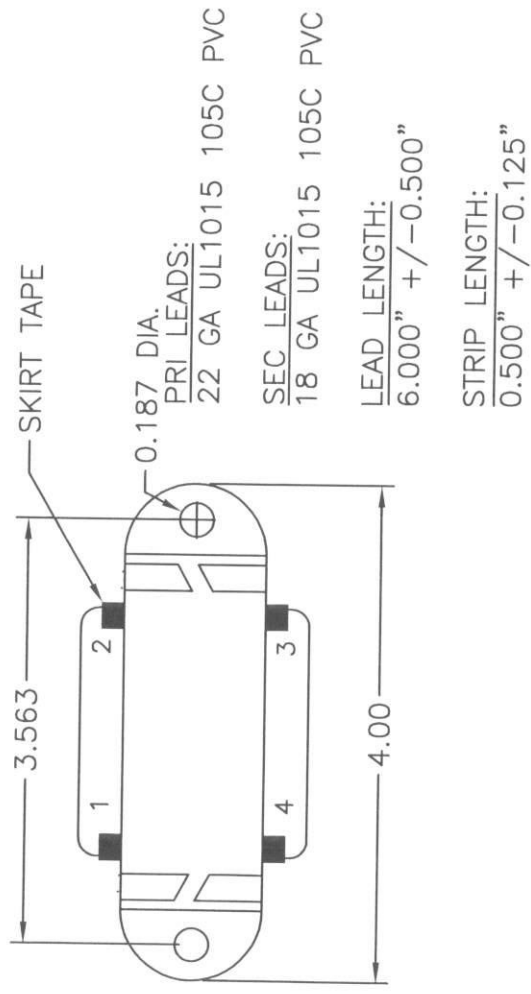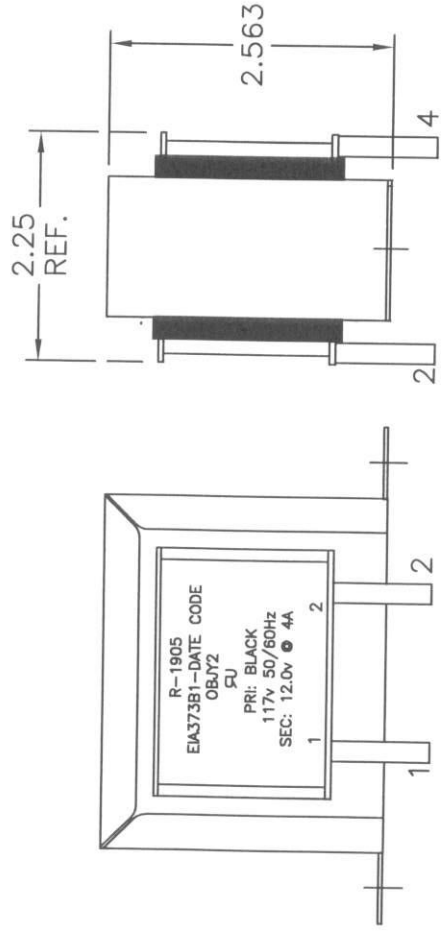


Electrical Characteristics

Primary
117v +/-15%, FREQUENCY + (50,60)Hz

Secondary
12.0v @ 4ARMS
REGULATION: 8.9% (APPROX)

Transformer Isolation
Pri/Sec 1500v
Wind/Core 1500v

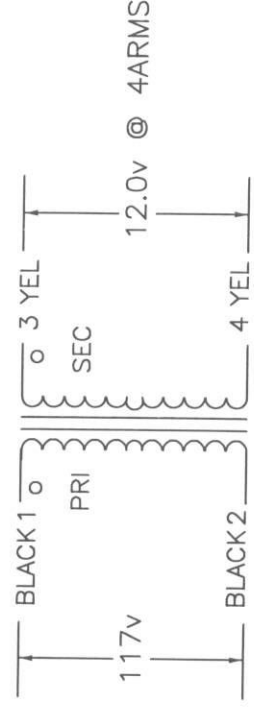

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	
DRAWN BY:	JAP
CHECKED BY:	JN
APPROVED BY:	JN
DATE:	5/21/96
DATE:	09/25/08
DATE:	09/25/08



DRAWING TITLE: Control & Filament Transformer

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	SPC20982	10M5586.dwg	A
SCALE:	NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1