



REVISIONS								
ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
-	Α	RELEASED	VEE	20/4/11	SHA	20/4/11		04/5/11

# **Configurations and Dimensions**

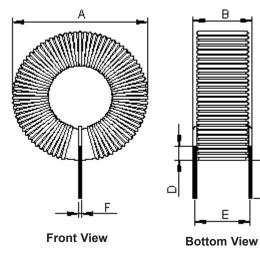

А	43 mm	(Max.)		
В	16 mm	(IVIAX.)		
С	12.5 ±1 mm	-		
D	1 mm	(Min.)		
E	13.5 ±1 mm	-		
F	1 ±0.1 mm	-		

## **Schematic Diagram**





#### Note:

1. Wire UEFN/U Ø1mm (155°C) 2. 77TS (Reference) C.W

#### **Test Data for Mechanical**

Test Item	A mm	B mm	C mm	D mm	E mm	F mm
Specification	43 (Max.)	16 (Max.)	12.5 ±1	1 (Min.)	13.5 ±1	1 ±0.1
1	41.62	14.57	12.59	1.75	13.78	1.01
2	41.72	14.6	12.38	1.8	13.82	1.01
3	41.82	14.62	13.01	1.54	13.88	1
4	41.9	14.59	12.75	1.68	13.82	1.02
5	41.75	14.62	13.02	1.75	13.74	1.01
Average	41.76	14.6	12.75	1.7	13.81	1.01

## **Electrical Characteristics**

Test Condition		
10 KHz / 5 mA	L	560 µH ±15%
T <sub>a</sub> = 25°C	DCR	77 mΩ ±10% (Max.)
10 KHz / 5 mA I <sub>rms</sub> = 10 A	ΔΤ	Temperature rise 40°C (Max.)

Е

ပ

Operating temperature : -55°C to +130°C


Important Notice : This data sheet and its contents (the "Information") belong to the mem- bers of the Premier Farnell group of companies (the "Group") or are licensed to it. No	TOLERANCES:	DRAWN BY:	DATE:	DRAWIN	IG TITLE:			
licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously sup-	INLESS OTHERWISE 🛛 🛏	VEE	20/04/11	Inductor				
plied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any	SPECIFIED,	CHECKED BY:	DATE:	SIZE	DWG NO.		ELECTRONIC FILE	REV
use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on	DIMENSIONS ARE FOR REFERENCE	SHA	20/04/11			M10002598	MCAP115018077A-561LU	
the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not oper-	PURPOSES ONLY.	APPROVED BY:	DATE:					
ate to limit or restrict the Group's liability for death or personal injury resulting from its negli- gence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2011.			04/05/11	SCALE	: NTS	U.O.M.: mm	SHEET: 1 (	DF 4

	PART NO.		REVISIONS										
multicomp		ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE			
	MCAP115018077A-561LU	-	А	RELEASED	VEE	20/4/11	SHA	20/4/11		04/5/11			

## **Test Data for Electrical**

Test Item	L µH	DCR mΩ	ΔΤ
Condition	10 KHz / 5 mA	at 25°C	10 KHz / 5 mA I <sub>rms</sub> = 10 A
Specification	560 ±15%	77 ±10%	Temperature rise 40°C (Max.)
1	557.2	78.98	
2	564.5	77.41	
3	578.55	76.71	ОК
4	580.8	79.07	
5	559.72	77.32	
Average	568.15	77.9	ОК


## **Electric Characteristics**

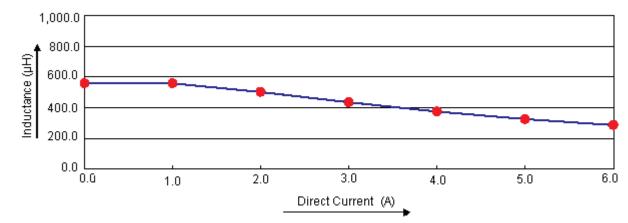


Important Notice : This data sheet and its contents (the "Information") belong to the mem- bers of the Premier Famell group of companies (the "Group") or are licensed to it. No	TOLERANCES:	DRAWN BY:	DATE:	DRAWING TITLE:			
licence is granted for the use of it other than for information purposes in connection with	UNLESS OTHERWISE	VEE	20/04/11		Inducto	r	
piled. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purcoses and not make any assumptions based on the suitability of the products for their purcoses and not make any assumptions based on the suitability of the products for their purcoses and not make any assumptions based on the suitability of the products for their purcoses and not make any assumptions based on the suitability of the products for their purcoses and not make any assumptions based on the suitability of the products for their purcoses and not make any assumptions based on the suitability of the products for their purcoses and not make any assumptions based on the suitability of the products for their purcoses and not make any assumptions based on the products of the products for their purcoses and not purcose and not purcose and not be any assumptions based on the purcose and not purcose and not purcose and not be any assumptions based on the purcose and not purcose and not be any assumptions based on the purcose and not be any assumptions based on the purcose and not be any assumptions based on the purcose and not be any assumptions based on the purcose and not be any assumptions based on the purcose and not be any assumptions based on the purcose and not be any assumptions based on the purcose and not be any assumptions based on the purcose and not be assumptions based on the purcose and not be any assumptions based on the purcose and not be assumptions based on the purcose a	SPECIFIED, DIMENSIONS ARE	CHECKED BY: SHA	DATE: 20/04/11	SIZE DWG NO.	M10002508	ELECTRONIC FILE MCAP115018077A-561LU	REV A
the information or use of it (including lightlift) regulting from peoligence or where the Orgun	FOR REFERENCE PURPOSES ONLY.	APPROVED BY:	DATE: 04/05/11	SCALE: NTS	U.O.M.: mm		F 4

multicomp	PART NO.			REVISIONS						
		ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
	MCAP115018077A-561LU	-	Α	RELEASED	VEE	20/4/11	SHA	20/4/11		04/5/11

## **Electric Characteristics**

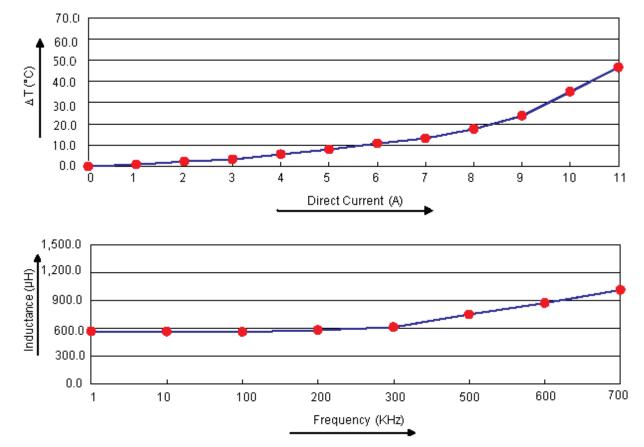

Important Notice : This data sheet and its contents (the "Information") belong to the mem- bers of the Premier Farnell group of companies (the "Group") or are licensed to it. No	TOLERANCES:	DRAWN BY:	DATE:	DRAWING TITLE:				
licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to chance without notice and replaces all data sheets previously sup-	UNLESS OTHERWISE	VEE	20/04/11	Inductor				
plied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any	SPECIFIED,	CHECKED BY:	DATE:	SIZE DWG NO.		ELECTRONIC FILE	REV	
use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on	DIMENSIONS ARE	SHA	20/04/11	Δ	M10002598	MCAP115018077A-561LU	Α	
the Information rouse of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not oper-	PURPOSES ONLY.	APPROVED BY:	DATE:					
ate to limit or restrict the Group's liability for death or personal injury resulting from its negli- gence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2011.			04/05/11	SCALE: NTS	U.O.M.: mm	SHEET: 3 OF	₹4	



# **Reliability Test**

Test Item	Specifications		Test Method and Remarks				
Operating temperature range	-55°C to +130°C		Including temperature	rise due to self-generated heat.			
Storage condition	Ambient temperature Humidity	: 0°C to 40°C : Below 70% RH	To maintain the solderability of terminal electrodes, care must be taker control temperature and humidity in the storage area.				
	Appearance : No abnormality No damage		According to J-STD-02 Test condition	20B level 3 :60°C 60% RH			
Moisture sensitivity	DCR change :	: Within ±5% : Within ±5%	Test duration Recovery	<ul><li>: 40 hrs</li><li>: 1 to 2 hours of recovery under the standard condition after the removal from the test chamber.</li></ul>			
Solderability		chibit a continuous solder cts for a minimum of 95% any individual lead.	According to J-STD-00 Steam aging category Steam aging duration Solder Solder temperature Dip time	: 97°C 98% RH			

## **Material List**

No.	ltem	Material Description		
1	Core	T150-75-TAF200 (Red / White)		
2	Wire	UEFN/U 1 mm (155°C)		
3	Solder	Sn99.3% / Cu0.7%		

## Part Number Table

Description	Part Number
•	
Inductor, 560µH, 15%, 2 Pins	MCAP115018077A-561LU

nportant Notice : This data sheet and its contents (the "Information") belong to the mem- ers of the Premier Farnell group of companies (the 'Group') or are licensed to it. No sence is granted for the use of it other than for information purposes in connection with he products to which it relates. No licence of any intellectual property rights is granted. The formation is subject to change without notice and replaces all data sheets previously sup-	TOLERANCES:	DRAWN BY:	DATE:	DRAWING TITLE:			
	<ul> <li>UNLESS OTHERWISE</li> <li>SPECIFIED,</li> <li>DIMENSIONS ARE</li> <li>FOR REFERENCE</li> <li>PURPOSES ONLY.</li> </ul>	VEE	20/04/11	Inductor			
plied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any		CHECKED BY:	DATE:	SIZE DWG NO.	M10002598	ELECTRONIC FILE MCAP115018077A-561LU	REV A
nade of it. Users of this data sheet should check for themselves the Information and uitability of the products for their purpose and not make any assumptions based on nation included or omitted. Liability for loss or damage resulting from any reliance on		SHA	20/04/11	Δ			
the information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not oper-		APPROVED BY:	DATE:		I		F 4
ate to limit or restrict the Group's liability for death or personal injury resulting from its negli- gence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2011.			04/05/11	SCALE: NTS	U.O.M.: mm	SHEET: 4 OF	