


# Dot Graphic VFD Module

# GU256x64D-7000

- ❑ 256x64 Dot Graphic
- ❑ Single 5V Supply
- ❑ High Brightness Blue Green Display
- ❑ Operating Temp -20°C to +70°C
- ❑ 11 Multi Sized Fonts
- ❑ High Speed 8 Bit Parallel Interface
- ❑ Asynchronous RS232 Serial Interface

The module includes the Vacuum Fluorescent Display glass, VF drivers and micro-controller ICs with refresh RAM, character generator and interface logic. The high speed 8 bit parallel interface is 5V TTL/CMOS compatible suitable for connection to a host CPU bus. The asynchronous serial interface accepts baud rates up to 115,200 with none parity. The module is ready to receive ASCII characters without initialization commands.

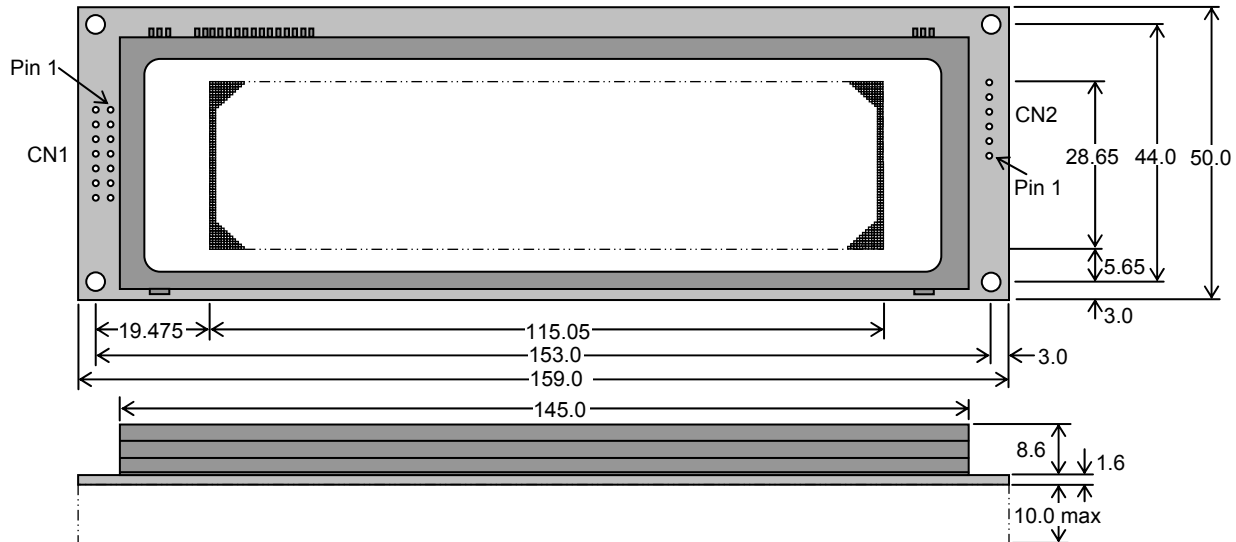

Dimensions in mm & subject to tolerances. Mounting holes 3.2mm dia.

## ELECTRICAL SPECIFICATION

Parameter	Symbol	Value	Condition
Power Supply Voltage	VCC	5.0VDC +/- 5%	GND=0V
Power Supply Current	ICC	TBD mADC typ.	VCC=5V
RS232 SIN High Input	VIH	3.0VDC min. 15VDC max	VCC=5V
RS232 SIN Low Input	VIL	-15VDC min 0.5VDC max	VCC=5V
SBUSY High Output	VOH	4.0VDC min. Vcc max.	VCC=5V
SBUSY Low Output	VOL	0VDC min 0.5VDC max.	VCC=5V
Logic High Input	VIH	0.8xVcc min. Vcc max.	VCC=5V
Logic Low Input	VIL	0VDC min 0.2xVcc max	VCC=5V
Logic High Output	VOH	3.8VDC min. Vcc max.	IOH=-1.5mA
Logic Low Output	VOL	0VDC min 0.6VDC max.	IOL =1.6mA

The power on rise time should be less than 100ms. Inrush current at power on can be 2 x ICC.

## OPTICAL and ENVIRONMENTAL SPECIFICATIONS

Parameter	Value
Display Area (XxY mm)	115.05 x 28.65
Dot Size/Pitch (XxY mm)	0.3 x 0.3 / 0.45 x 0.45
Luminance	800 cd/m <sup>2</sup> Typ.
Colour of Illumination	Blue-Green (Filter for colours)
Operating Temperature	-20°C to +70°C
Storage Temperature	-40°C to +85°C
Operating Humidity (non condensing)	20 to 80% RH @ 25°C

## SOFTWARE COMMANDS – Popular codes, more included

Command	Code
Write Character to Display	20H-FFH
BS, HT, LF, CR, Display Clear	08H, 09H, 0AH, 0DH, 0CH
Initialize Display	1BH 40H
Specify International Font	1BH 52H n
Vertical Scroll Mode	1FH 02H
Horizontal Scroll Mode	1FH 03H
Cursor Set	1FH 24H xL xH yL yH
Scroll Display Action	1FH 28H 61H 10H wL wH cL cH s
Display Blank	1FH 28H 61H 11H p t1 t2 c
Screen Saver	1FH 28H 61H 40H p
Bit Image Display Group	1FH 28H 66H 11H xL xH
Font Magnified Display	1FH 28H 67H 40H x y
Brightness Level Setting	1FH 58H n

The module defaults to 5x7 font, cursor top left at power on.

## COMMON FONT

	00	10	20	30	40	50	60	70
00			0	A	P	'	F	
01			!	1	Q	a	q	
02			"	2	B	b	r	
03			#	3	C	c	s	
04			\$	4	D	d	t	
05			%	5	E	e	u	
06			&	6	F	f	v	
07			'	7	G	g	w	
08			(	8	H	h	x	
09			)	9	I	i	y	
0A		*	J	J	Z	Z		
0B		+	K	K	C	C		
0C		,	L	L	N	N		
0D		-	M	M	O	O		
0E		.	N	N				
0F		/	O	O				

## INTERNATIONAL FONTS (n=0)

	80	90	A0	B0	C0	D0	E0	F0
00	Š	š	Ž	ž	Ł	ł	Ć	ć
01	Ś	ś	Ź	ź	Ń	ń	Ś	ś
02	Ą	ą	Ć	ć	Ę	ę	Į	į
03	Š	š	Ž	ž	Ł	ł	Ć	ć
04	Ś	ś	Ź	ź	Ń	ń	Ś	ś
05	Ą	ą	Ć	ć	Ę	ę	Į	į
06	Š	š	Ž	ž	Ł	ł	Ć	ć
07	Ś	ś	Ź	ź	Ń	ń	Ś	ś
08	Ą	ą	Ć	ć	Ę	ę	Į	į
09	Š	š	Ž	ž	Ł	ł	Ć	ć
0A	Ś	ś	Ź	ź	Ń	ń	Ś	ś
0B	Ą	ą	Ć	ć	Ę	ę	Į	į
0C	Š	š	Ž	ž	Ł	ł	Ć	ć
0D	Ś	ś	Ź	ź	Ń	ń	Ś	ś
0E	Ą	ą	Ć	ć	Ę	ę	Į	į
0F	Š	š	Ž	ž	Ł	ł	Ć	ć

## PARALLEL INTERFACE – CN1

Pin	Sig	Pin	Sig
1	GND	8	D1
2	VCC	9	D2
3	NC*	10	D3
4	RS	11	D4
5	/WR	12	D5
6	/RD	13	D6
7	D0	14	D7(PBUSY)

\*Pin 3 can be changed to /RESET or PBUSY terminal by selection of Jumper JRB. RS is not used. Full specification available on request.

## SERIAL INTERFACE – CN2

Pin	Async Sig	Description
1	VCC (5V)	Power Supply I/P
2	SIN	RS232 Data I/P
3	GND	GND
4	SBUSY	Busy Output
5	NC	-
6	/RESET	Reset Input

## CONTACT

**Noritake Sales Office Tel Nos**  
 Nagoya Japan: +81 (0)52-561-9867  
 Canada: +1-416-291-2946  
 Chicago USA: +1-847-439-9020  
 Munchen (D): +49 (0)89-3214-290  
 Itron UK: +44 (0)1493 601144  
 Rest Europe: +49 (0)61-0520-9220  
[www.noritake-iron.com](http://www.noritake-iron.com)

Subject to change without notice.  
 IUK Doc Ref:13451 Iss:1 18Apr06